Radiation Data and Reports

VOLUME 13, NUMBER 9

SEPTEMBER 1972

(Pages 469–536)

RDDRA4 13(9) 469–536 (1972)

U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Radiation Programs

INTERNATIONAL NUMERICAL MULTIPLE AND SUBMULTIPLE PREFIXES

Multiples and submultiples	Prefixes	Symbols	Pronunciations
10^{12}	tera	T	tĕr'a
10^{9}	giga	G	jĭ'ga
10^{6}	mega	M	mĕg'a
10^{3}	kilo	k	kĭ'lo
10^{2}	hecto	h	hĕk'to
10	deka	da	dĕk'a
10^{-1}	deci	d	dĕs'i
10^{-2}	centi	c	sĕn'ti
10^{-3}	milli	m	mĭl'i
10^{-6}	micro	μ	mi'kro
10^{-9}	nano	n	năn'o
10^{-12}	pico	p	pē'ko
10^{-15}	femto	f	fĕm'to
10^{-18}	atto	a	ăt'to

SYMBOLS, UNITS, AND EQUIVALENTS

Symbol	Unit	Equivalent
Å	angstrom	10^{-10} meter
a	annum, year	
BeV	billion electron volts	GeV
Ci	curie	3.7×10^{10} dps
cm	centimeter(s)	0.394 inch
cpm	counts per minute	
dpm	disintegrations per minute	
dps	disintegrations per second	
eV	electron volt	1.6×10^{-12} ergs
g	gram(s)	
GeV	giga electron volts	1.6×10^{-3} ergs
kg	kilogram(s)	1,000 g = 2.205 lb.
km^2	square kilometer(s)	
kVp	kilovolt peak	
m^3	cubic meter(s)	
mA	milliampere(s)	
mCi/mi^2	millicuries per square mile	0.386 nCi/m^2 (mCi/km^2)
MeV	million (mega) electron volts	1.6×10^{-4} ergs
mg	milligram(s)	
mi^2	square mile(s)	
ml	milliliter(s)	
mm	millimeter(s)	
nCi/m^2	nanocuries per square meter	2.59 mCi/mi^2
pCi	picocurie(s)	10^{-12} curie = 2.22 dpm
R	roentgen	
rad	unit of absorbed radiation dose	100 ergs/g

The mention of commercial products is not to be construed as either an actual or implied endorsement of such products by the U.S. Environmental Protection Agency.

RADIATION DATA AND REPORTS

Volume 13, Number 9, September 1972

Radiation Data and Reports, a monthly publication of the Environmental Protection Agency, presents data and reports provided by Federal, State, and foreign governmental agencies, and other cooperating organizations. Pertinent original data and interpretive manuscripts are invited from investigators.

In August 1959, the President directed the Secretary of Health, Education, and Welfare to intensify Departmental activities in the field of radiological health. The Department was assigned responsibility within the Executive Branch for the collation, analysis, and interpretation of data on environmental radiation levels. This responsibility was delegated to the Bureau of Radiological Health, Public Health Service. Pursuant to the Reorganization Plan No. 3 of 1970, effective December 2, 1970, this responsibility was transferred to the Radiation Office of the Environmental Protection Agency which was established by this reorganization.

The Federal agencies listed below appoint their representatives to a Board of Editorial Advisors. Members of the Board advise on general publications policy; secure appropriate data and manuscripts from their agencies; and review those contents which relate to the special functions of their agencies.

Department of Defense
Department of Agriculture
Department of Commerce
Department of Health, Education, and Welfare
Environmental Protection Agency
Atomic Energy Commission

CONTENTS

Page

REPORTS

Environmental Monitoring and Disposal of Radioactive Wastes from U.S. Naval Nuclear-Powered Ships and Their Support Facilities, 1971 ---- 469

M. E. Miles, G. L. Sjoblom, and R. D. Burke

DATA

SECTION I. MILK AND FOOD ---- 479

Milk Surveillance, May 1972 ---- 479

Food and Diet Surveillance ---- 488

SECTION II. WATER ---- 489

Gross Radioactivity in Surface Waters of the United States, January 1972 ---- 490

Radioactivity in North Carolina Surface, Cistern, and Saline Waters, 1968–1970 ---- 491

Results of Radiological Sampling from the Community Water Supply Study, 1969 ---- 495

CONTENTS—continued

	Page
SECTION III. AIR AND DEPOSITION	513
Radioactivity in Airborne Particulates and Precipitation	513
1. Radiation Alert Network, May 1972	514
2. Canadian Air and Precipitation Monitoring Program, May 1972	516
3. Pan American Air Sampling Program, May 1972, *PAHO* and *EPA*	517
4. California Air Sampling Program, May 1972	517
5. Mexican Air Monitoring Program, January–April 1972	519
Air Surveillance Network, May 1972	521
SECTION IV. OTHER DATA	525
Offsite Surveillance Around the Nevada Test Site, January–June 1969	525
Environmental Levels of Radioactivity at Atomic Energy Commission Installations	527
1. Brookhaven National Laboratory, July–December 1969	528
2. Neutron Devices Department, January–June 1971	530
Nuclear Power Reactors in the United States, June 30, 1972	532
Reported Nuclear Detonations, August 1972	536
Guide for Authors	Inside back cover

RADIATION DATA AND REPORTS

Published under the direction of

W. D. Rowe
Deputy Assistant Administrator for Radiation Programs

BOARD OF EDITORIAL ADVISORS

Capt. Myron I. Varon, MC, USN
Department of Defense

Dr. Milton W. Lammering
Environmental Protection Agency

Dr. Takuma Tanada
Department of Agriculture

Dr. Randall S. Caswell
Department of Commerce

Robert E. Simpson
Department of Health, Education, and Welfare

Dr. Martin B. Biles
Atomic Energy Commission

STAFF

Editor	Samuel Wieder
Managing Editor	Kurt L. Feldmann
Editorial Assistants	Jacqueline J. Copp Mary H. Nesdore
Illustrator	Marylee C. Hill

Address correspondence to the Editor, *Radiation Data and Reports*, Office of Radiation Programs, Parklawn 18B-40, Washington, D.C. 20460.

For subscriptions to *Radiation Data and Reports*, please use the order form on last page of this issue.

U.S. ENVIRONMENTAL PROTECTION AGENCY

William D. Ruckelshaus, Administrator

Reports

Environmental Monitoring and Disposal of Radioactive Wastes From U.S. Naval Nuclear-Powered Ships and Their Support Facilities, 1971

M. E. Miles, G. L. Sjoblom, and R. D. Burke [1]

This report assesses the effect on the environment of disposal of radioactive wastes originating from U.S. Naval nuclear propulsion plants and their support facilities. The total radioactivity discharged into all ports and harbors from the more than 100 reactor plants and supporting tenders, bases, and shipyards was less than 0.002 curie in 1971. This small amount of radioactivity has had no significant or discernable effect on the quality of the human environment. Results of environmental surveys of harbor water and bottom sediment for gross radioactivity and for cobalt-60 show that (1) no increase in radioactivity has been detected in harbor water, (2) discharges of liquid wastes from U.S. Naval nuclear-powered ships have not caused a measurable increase in the general background radioactivity of the environment, and (3) low-level cobalt-60 radioactivity is still detectable in localized areas of harbor bottom sediment around a few piers at operating bases and shipyards where maintenance and overhaul of Navy nuclear-powered ships have been conducted over a period of several years; these levels have decreased in recent years.

This report confirms that procedures used by the Navy to control discharges of radioactivity from U.S. Naval nuclear-powered ships and their support facilities are effective in protecting the environment and the health and safety of the general public.

The radioactivity in wastes discussed in this report originates in the pressurized water reactors of U.S. Naval nuclear-powered ships. As of the end of 1971, there were 96 nuclear-powered submarines and four nuclear-powered surface ships in operation. Support facilities involved in construction, maintenance, overhaul, and refueling of these nuclear propulsion plants include nine shipyards, 10 tenders, and two submarine bases. This report first describes disposal of radioactive liquid wastes, then solid wastes. The final section discusses monitoring of the environment to determine the effects of radioactive discharges.

Radioactive liquid waste disposal

In the shipboard reactors, pressurized water circulating through the reactor core picks up the heat of nuclear reaction. Reactor cooling water circulates through a closed piping system to heat exchangers which transfer the heat to water in a secondary steam system isolated from the primary cooling water. The steam is then used as the source of power for the propulsion plant as well as for auxiliary machinery. Discharges of radioactivity from ships occur primarily when reactor coolant water expands as a result of being heated to operating temperature; this coolant passes through a purification system ion exchange resin bed prior to being transferred from the ship.

The principal source of radioactivity in liquid wastes is from trace amounts of corrosion and wear products from reactor plant metal surfaces in contact with reactor cooling water. Radionuclides with half-lives greater than one day in these corrosion and wear products include tungsten-187, chromium-51, hafnium-181, iron-59, iron-55, zirconium-95, tantalum-182, manganese-54, cobalt-58, and cobalt-60. The predominant and also longest-lived of these is cobalt-60, which has a 5.3 year half-life; cobalt-60 also has the most restrictive concentration limit in water listed by organizations which set radiological standards (*1–3*) for these corrosion

[1] Nuclear Power Directorate, Naval Ship Systems Command, Department of the Navy.

and wear radionuclides. Therefore, radioactive waste disposal is conservatively controlled by assuming that all the long-lived radioactivity is cobalt-60.

Liquid wastes discharged by support facilities result from operations such as draining shipboard reactor systems, decontaminating radioactivity contaminated piping system, and laundering anti-contamination clothing worn by personnel. These facilities are equipped with processing systems to remove most of the radioactivity from liquid waste prior to discharge into harbors.

Procedures for control of radioactive liquid wastes in harbors

Discharge limits for radioactive liquid wastes from U.S. Naval nuclear-powered ships and their support facilities are consistent with applicable recommendations issued by the Federal Radiation Council (incorporated into the Environmental Protection Agency late in 1970), U.S. Atomic Energy Commission (AEC), National Council on Radiation Protection and Measurements, International Commission on Radiological Protection (ICRP), International Atomic Energy Agency, and National Academy of Sciences—National Research Council (*1–7*). In consonance with these recommendations, the policy of the U.S. Navy is to reduce to the minimum practicable the amounts of radioactivity discharged within 12 miles from shore including into harbors. Keeping discharges small minimized the radioactivity available to build up in the environment or to concentrate in marine life. To implement this policy of minimizing discharges, the Navy has issued standard instructions defining the radioactive waste disposal limits and procedures to be used by U.S. Naval nuclear-powered ships and their support facilities. These instructions were reviewed and concurred in by the U.S. Atomic Energy Commission and the U.S. Public Health Service.

Liquid waste discharges in harbors

The total amounts of long-lived radioactivity discharged into harbors and seas within 12 miles from shore during the past 5 years are summarized in table 1, which updates information in references *8–13*. Included are data on discharges from U.S. Naval nuclear-powered ships and from supporting shipyards, tenders, and submarine bases. Locations listed in table 1 include all operating bases and home ports in the United States and overseas as well as all other ports which have been visited by Naval nuclear-powered ships. The quantities of radioactivity listed in this table are conservatively reported as if the entire radioactivity consisted of cobalt-60, which is the predominant long-lived radionuclide and also has the most stringent discharge limits.

Although this table shows both gallons and curies discharged, the curie data are the most significant. In 1971 the gallons shown in table 1 for most of these organizations are no more than many single U.S. homes discharge in their sewage systems each year.

The table shows that nearly all the radioactive discharges occur where shipyards are overhauling nuclear-powered ships. In 1971, for example, under 1 percent of the less than 0.002 curie total was discharged into harbors other than those where nuclear-powered ships were overhauled.

Table 1 shows that the total long-lived radioactivity discharged annually for the last five years into harbors has been a small fraction of a curie per year and was less than 0.002 curie in 1971 from all U.S. Naval nuclear propulsion plants and support facilities. This amount of radioactivity has had no significant or discernable effect on the quality of the human environment.

Other radionuclides

Reactor coolant also contains short-lived radionuclides with half-lives of seconds to hours. The highest concentrations in reactor coolant are from nitrogen-16 (7 second half-life), nitrogen-13 (10 minute half-life), fluorine-18 (1.8 hour half-life), argon-41 (1.8 hour half-life), and manganese-56 (2.6 hour half-life). For the longest-lived of these, about one day after discharge from an operating reactor, the concentration is reduced to one thousandth of the initial concentration, and in about 2 days, the concentration is reduced to one millionth. Most discharges from ships occur during heating up prior to extensive power operation of the reactor, when short-lived radionuclides

Table 1. Radioactive liquid waste discharged to harbors, from U.S. Naval nuclear-powered ships and their support facilities for 1967 through 1971 [a]

Facility	1967		1968		1969		1970		1971	
	Thousand gallons	Curies	Thousand gallons	Curies	Thousand gallons	Curies	Thousand gallons	Curies	Thousand gallons	Curies
Portsmouth, N.H.; Naval Shipyard	265	0.012	171	0.006	87	0.002	68	0.002	51	<0.001
Groton-New London, Conn; Electric Boat Division, tender at State Pier, and submarine base	606	.011	469	.006	615	.006	359	.004	258	<.001
Newport News, Va; Newport News Shipbuilding	1,533	.034	1,146	.025	870	.022	1,466	.013	262	<.001
Norfolk, Va; Naval Shipyard and tender	1,784	.034	184	.004	102	.005	98	.001	38	<.001
Charleston, S.C.; Naval Shipyard and tenders	320	.011	227	.004	131	.001	58	<.001	45	<.001
Pascagoula, Miss; Ingalls Nuclear Division	6	<.001	9	<.001	8	<.001	7	<.001	28	<.001
San Diego, Calif; tenders at Ballast Point	28	.001	<1	<.001	<1	<.001	<1	<.001	<1	<.001
Long Beach, Calif; Naval Shipyard and Base	<1	<.001	<1	<.001	2	<.001	<1	<.001	<1	<.001
Vallejo, Calif; Mare Island Naval Shipyard	140	.001	391	.027	80	.001	121	.002	219	<.001
Bremerton, Wash; Puget Sound Naval Shipyard	246	.002	182	.001	152	.001	136	<.001	98	<.001
Pearl Harbor, Hawaii; Naval Shipyard and submarine base	683	.008	886	.006	1,279	.008	258	.002	90	<.001
Apra Harbor, Guam	42	.002	26	.001	<1	<.001	<1	<.001	<1	<.001
All other harbors, United States and foreign	<1	<.001	<1	<.001	<1	<.001	<1	<.001	<1	<.001
Total	5,653	0.116	3,691	0.081	3,326	0.048	2,571	0.024	1,089	<0.002

[a] Radioactivity data has been standardized to cobalt-60 and excludes tritium. Volumes are prior to dilution. A total of 0.02 curie was discharged into the river at Quincy, Mass., from 1961 through March 1969 when all work on U.S. Naval nuclear-powered ships was discontinued at General Dynamics, Quincy Division. A total of 0.01 curies was discharged into the river near Camden, N.J., from 1960 through June 1967 when all work on U.S. Naval nuclear-powered ships was discontinued at New York Shipbuilding Corporation. Slight differences in volumes and radioactivity data from past reports results from using more significant figures in this table. Volumes less than 500 gallons are shown as <1 thousand. Quantities less than 0.0005 curie are shown as <0.001 curie.

are at low concentrations in coolant. Total short-lived radioactivity in such a discharge is less than 0.001 curie. Because of their small amounts and rapid decay, short-lived radionuclides are insignificant compared to long-lived radionuclides for waste disposal considerations.

Fission products produced in the reactor are retained within the fuel elements. The fission gases, krypton and xenon, are also retained within the fuel elements. However, trace quantities of naturally occurring uranium impurities in reactor structural materials release small amounts of fission products to reactor coolant. The concentrations of fission products and the volumes of reactor coolant discharged are so low, however, that the total radioactivity attributed to long-lived fission product radionuclides, strontium-90 and cesium-137, in discharges from U.S. Naval nuclear-powered ships and their support facilities has been less than 0.001 curie per year and for all harbors combined. Fallout of these same fission products often has been more than this in one rainfall in a single harbor.

Tritium

Small amounts of tritium are formed in reactor coolant systems as a result of neutron interaction with the approximately 0.015 percent of naturally occurring deuterium present in water, and other nuclear reactions. Although tritium has a 12-year half-life, the radiation produced is of such low energy that the radioactivity concentration guide issued by the ICRP, the AEC and by other standard-setting organizations is 100 times higher for tritium than for cobalt-60. This tritium is in the oxide form and chemically indistinguishable from water; therefore it does not concentrate significantly in marine life or collect on sediment as do other radionuclides.

Tritium is naturally present in the environment because it is generated by cosmic radiation in the upper atmosphere. Reference *14* reports that the production rate from this source is about six million curies per year, which through rainfall causes a tritium inventory in the oceans of about one hundred million curies. Because of this naturally occurring tritium, much larger discharges of tritium than

are conceivable from Naval nuclear reactors would be required to make a measurable change in the background tritium concentration.

The total amount of tritium discharged during each of the last 5 years from all U.S. Naval nuclear-powered ships and their supporting tenders, bases, and shipyards has been less than 200 curies. Most of these discharges have been in the ocean more than 12 miles from shore. This total tritium discharged from the entire nuclear Navy is less than typical electrical generating pressurized water nuclear power stations discharge each year (*15*, *16*). Such discharges are too small to measurably increase the tritium concentration in the environment. Therefore, tritium has been excluded from the data in other sections of this report.

Liquid waste discharges at sea

Radioactive liquid wastes are also discharged at sea under strict controls. These ocean discharges are consistent with recommendations of the Council on Environmental Quality made in 1970 to the President (*17*). Procedures and limits for ocean discharges have been consistent with commendations made by the National Academy of Sciences—National Research Council (*5*) and by the International Atomic Energy Agency (*6*). Ship discharges have contained much less radioactivity than these reports considered would be acceptable. Total long-lived radioactivity for recent years, excluding tritium, discharged farther than 12 miles from shore by all U.S. Naval nuclear-powered ships and their supporting tenders is shown in table 2. Discharge of the radioactivity reported in table 2 has no significant effect on the radioactivity of the marine environment.

Table 2. Radioactive liquid waste discharged at sea by U.S. Naval nuclear-powered ships and supporting tenders

Year	Quantity (thousand gallons)	Radioactivity (Ci)
1967	1,520	1.3
1968	1,630	1.1
1969	1,570	1.7
1970	1,220	.8
1971	1,840	.8

Reactor coolant is purified through an ion exchange bed. This resin becomes expended and periodically requires replacement. Until 1970 expended resin was occasionally discharged at sea in accordance with procedures recommended in the National Academy of Sciences—National Research Council Publication 658, "Radioactive Waste Disposal from Nuclear Powered Ships" (*5*). Publication 658 developed procedures to assure no adverse impact on the environment if up to 300 nuclear-powered ships each discharged 400 curies of radioactivity every 2 months off the shores of the United States. Even though the actual discharges of radioactivity in resin by the entire Navy each year was less than one thousandth of the amounts envisioned by the National Academy of Sciences, continued effort by the Navy resulted in improvements which permitted discontinuing sea disposal of ion exchange resin in 1970. Depleted resin is currently packaged for land disposal as solid radioactive waste in AEC or State-licensed burial grounds.

Solid radioactive waste disposal

During maintenance and overhaul operations, solid low-level radioactive wastes consisting of contaminated rags, plastic bags, paper, filters, ion exchange resin and scrap materials are collected by nuclear-powered ships and their support facilities. High-level radioactive wastes are associated with expended reactor fuel, all of which is transferred to the AEC for processing ashore.

Solid radioactive materials from Naval nuclear-powered ships are not dumped at sea since the Navy procedures prohibit sea disposal of solid radioactive materials. Solid radioactive waste materials are packaged in strong, tight containers, shielded as necessary, and shipped to burial sites licensed by the AEC or a State under agreement with AEC. Shipyards and other shore facilities are not permitted to dispose of radioactive solid wastes by burial on their own sites. All packaging and shipping of radioactive materials is performed in strict compliance with U.S. Department of Transportation and AEC requirements.

Table 3 summarizes total radioactivity and volumes of radioactive solid waste disposal for the last 5 years. Table 3 does not include expended fuel which is processed by the AEC at special facilities ashore.

Table 3. Radioactive solid waste from U.S. Naval nuclear-powered ships and their support facilities for 1967 through 1971 [a]

Facility	1967		1968		1969		1970		1971	
	Thousand cubic feet	Curies	Thousand cubic feet	Curies	Thousand cubic feet	Curies	Thousand cubic feet	Curies	Thousand cubic feet	Curies
Portsmouth, N.H.; Naval Shipyard	30	198	31	151	8	3	14	16	12	9
Groton, New London, Conn; Electric Boat Division, tender at State Pier and submarine base	5	17	4	21	8	328	12	140	18	13
Newport News, Va; Newport News Shipbuilding	17	702	14	10	17	382	28	312	21	165
Norfolk, Va; Naval Shipyard and tender	11	86	2	11	6	8	9	146	10	33
Charleston, S.C; Naval Shipyard and tenders	15	52	14	110	15	9	8	6	6	4
Pascagoula, Miss; Ingalls Nuclear Division	0	0	0	0	1	<1	0	0	2	<1
San Diego, Calif; tenders at Ballast Point	1	<1	1	8	<1	2	<1	1	2	<1
Long Beach, Calif; Naval Shipyard and Base	<1	<1	<1	<1	<1	<1	<1	<1	1	<1
Vallejo, Calif; Mare Island Naval Shipyard	9	23	8	7	8	5	12	2	22	25
Bremerton, Wash; Puget Sound Naval Shipyard	14	193	14	48	11	42	18	1,327	21	59
Pearl Harbor, Hawaii; Naval Shipyard and submarine base	1	1	3	6	4	3	5	4	4	2
Total	103	1,272	92	372	78	783	106	1,954	119	311

[a] This table includes all radioactive waste from tenders and nuclear-powered ships. This radioactivity is primarily cobalt-60. The radioactive waste is shipped to burial facilities licensed by the AEC or State. Slight differences from past reports result from using different number of significant figures in this table. Volumes less than 500 cubic feet are reported as <1 thousand and activity less than 0.5 curie is reported as <1 curie.

Because of efforts to minimize solid waste and the utilization of compaction equipment, total volumes have remained nearly constant in spite of increasing work caused by increasing numbers of ships. The average annual volume for the entire Naval nuclear propulsion program could be contained in a cube measuring 15 yards on a side. The radioactivity does not require excessively long-time care in the licensed burial grounds since the principal radionuclides do not have half-lives longer than 5 years. In 100 years, such radioactivity will have decayed to one millionth the initial radioactivity. In less than 200 years, the total of all radioactivity, conservatively assumed to be cobalt-60 in table 3, will have decayed to less than one millionth of a curie and would not be detectable in the burial grounds using sensitive monitoring instruments.

Two U.S. Navy nuclear-powered submarines have been lost at sea in the Atlantic Ocean. The submarine THRESHER sank 10 April 1963, 100 miles from land in water 8,500 feet deep at latitude 41°45′N and longitude 65°00′W. The submarine SCORPION sank between 21 and 27 May 1968, 400 miles southwest of the Azores in more than 10,000 feet of water. The reactors used in all U.S. Naval submarines and surface ships are designed to minimize potential hazards to the environment even through the most severe casualty conditions such as actual sinking of the ship. First, the reactor core is so designed that it is physically impossible for it to explode like a bomb. Second, the reactor fuel elements are made of materials that are extremely corrosion resistant, even in sea water. The reactor core could remain submerged in sea water for decades without release of fission products while the radioactivity decays, since the protective cladding on the fuel elements corrodes only a few millionths of an inch per year. Thus, in the event of a serious accident where the reactor is completely submerged in sea water, the fuel elements will remain intact for an indefinite period of time and the radioactive material contained in these fuel elements should not be released. The maximum rate of release and dispersal of the radioactivity in the ocean, even if the protective cladding on the fuel were destroyed, would be so low as to be insignificant.

Radiation measurements, water samples, bottom sediment samples and debris collected from the area where THRESHER sank have been analyzed for radioactivity by various laboratories with highly sensitive equipment. Similarily, sea water and bottom sediment samples taken near SCORPION's hull have

been analyzed for radioactivity. None of these samples showed radioactivity above naturally occurring background levels and none showed evidence of radioactivity released from either THRESHER or SCORPION.

Environmental monitoring

Environmental monitoring surveys for radioactivity are periodically performed in harbors where U.S. Naval nuclear-powered ships are built or overhauled and where these ships have home ports or operating bases. These surveys are performed to verify the adequacy of liquid waste disposal procedures and limits. To ensure thoroughness and objectivity these surveys are made as independently as practicable from waste disposal operations. Samples from each harbor monitored are also checked at least annually by an AEC laboratory to ensure analytical procedures are correct and standardized. These AEC laboratory results have been consistent with shipyard and operating base results. As a further independent check of environmental monitoring, a laboratory of the U.S. Public Health Service (now part of the Environmental Protection Agency) has conducted detailed surveys of selected harbors (*18-20*). This laboratory has monitored the harbors at Charleston, S. C; Pearl Harbor, Hawaii; San Diego, Calif; Vallejo, Calif; New London, Conn; Newport News, Va; and Norfolk, Va. Navy monitoring results have been consistent with these surveys.

The Navy monitoring program initially emphasized analyzing water because it is used by boats and swimmers and because fish live in this water. Preoperational surveys were conducted in the harbors before use for nuclear-powered ships to establish base levels of gross beta activity of harbor water and sediment in the vicinity of berths to be used by nuclear-powered ships and locations where support facilities might discharge processed water. Results of the water monitoring showed that superimposed on the naturally occurring radioactivity (*21*) of potassium-40 in harbor water were large variations of other radioactivity from fallout. Surface layers of rainwater before much dilution in harbor water sometimes have measured more than 100 times higher than this natural radioactivity. In addition, rates of introduction of naturally radioactive radium, uranium, thorium and their associated radionuclides varied. Results of early monitoring for naturally occurring radioactivity of sediment samples were up to 10 times the beta activity present in sea water and varied widely from sample to sample and from month to month in a single harbor.

The current Navy environmental monitoring program is based on the results of the initial monitoring. This program presently consists of analyzing samples of harbor water and sediment, supplemented by shoreline surveys, posted film badges and effluent monitoring.

Five water samples are taken in each harbor once each quarter year in areas where nuclear-powered ships berth and from upstream and downstream locations. These samples are analyzed for gross gamma radioactivity and for cobalt-60 content. Procedures for analysis will detect cobalt-60 if its concentration exceeds one three hundredth of the nonoccupational AEC limit (*1*). No cobalt-60 has been detected in any of the 2,960 water samples from all harbors monitored.

Commencing in 1963 at Navy request, a radiological laboratory, now part of the Environmental Protection Agency, made additional analyses of samples from some harbors to identify radionuclides present in sediment. These analyses showed that cobalt-60 was the predominant radionuclide added to sediment from Naval nuclear reactor operations. Therefore, Navy monitoring procedures were changed to collect 20 to 120 sediment samples in each harbor once each quarter year. Standard 6-inch-square samplers modified to collect only the top one-half to one inch of sediment are used. The top layer was selected because it should be more mobile and more accessible to marine life than deeper layers. The samples are analyzed for gross gamma radioactivity and for cobalt-60. Results of the 4,001 sediment samples from harbors monitored by the Navy in the United States and possessions for 1971 are summarized in table 4.

Evaluation of the data summarized in table 4 shows that low-level cobalt-60 radioactivity in harbor bottom sediment is detectable around

Table 4. Summary of 1971 surveys for cobalt-60 in bottom sediment of U.S. harbors where U.S. Naval nuclear-powered ships have been regularly based, overhauled or built

Facility	Number of samples with cobalt-60			Total bottom area with cobalt-60 over 3 pCi/g[c] (km^2)	Estimated total cobalt-60 in top layer of sediment[d] (Ci)
	<3 pCi/g[a]	3–30 pCi/g	>30–300 pCi/g[b]		
Portsmouth, N.H.; Naval Shipyard	176	0	0	0	ND
Groton, New London, Conn; Electric Boat Division, State Pier, and submarine base	461	40	2	0.1	0.02
Newport News, Va; Newport News Shipbuilding	152	0	0	0	ND
Norfolk, Va; Naval Shipyard and Base	344	0	0	0	ND
Charleston, S.C.; Naval Shipyard and Bases	384	0	0	0	ND
Pascagoula, Miss; Ingalls Nuclear Division	208	0	0	0	ND
San Diego, Calif; Navy Piers at Ballast Point	158	0	0	0	ND
Long Beach, Calif: Naval Shipyard and Base	158	0	0	0	ND
Vallejo, Calif; Mare Island Naval Shipyard	397	0	0	0	ND
Bremerton, Wash: Puget Sound Naval Shipyard	150	0	0	0	ND
Pearl Harbor, Hawaii; Naval Shipyard and submarine base	350	1	0	.001	ND
Apra Harbor, Guam	120	0	0	0	ND

[a] Minimum detectable radioactivity is approximately 1 pCi/g wet weight. Results in units of pCi/cm^2 range from two to four times the value in pCi/g.
[b] One square kilometer is approximately equal to 0.4 square mile. Areas with cobalt-60 over 3 pCi/g were in immediate vicinity of piers used for berthing nuclear-powered ships.
[c] Maximum radioactivity in these samples was 87 pCi/g.
[d] Where total cobalt-60 in the surface sediment layer is less than 0.01 curie, ND is reported. Samples more than 1-foot-deep from several harbors show that total cobalt-60 present may be two to five times that measured in the surface layer.

a few piers at operating bases and shipyards where nuclear-powered ship maintenance and overhauls have been conducted over a period of several years. Cobalt-60 is not detectable above background levels in general harbor bottom areas away from these piers. Maximum total radioactivity observed in a U.S. harbor is less than one curie of cobalt-60. This radioactivity is small compared to background, since the quantity of naturally occurring radioactivity, such as potassium-40, radium, uranium and thorium, present in the sediment of a typical harbor amounts to hundreds of curies. Comparison to previous environmental monitoring data (*8-13*) shows that these environmental cobalt-60 levels have been steadily decreasing.

The first data column in table 4 includes all samples with less than 3 picocuries of cobalt-60 per gram of sediment. These low levels are difficult to measure because the levels of radioactivity in sediment from other sources are much higher. The value of 30 picocuries per gram was selected for the top of the second range of data, since it corresponds to the upper limit for exposure (*1, 3*) even if consumed continuously by members of the general public. Although sediment can not be consumed by humans, it might serve as a food source for marine life. Data on uptake of cobalt-60 from sediment by marine life obtained to date show that in the salt water harbor bottom environments, no significant buildup of cobalt-60 occurs in marine life. Such buildup is unlikely because the cobalt is in the form of insoluble metallic oxides. Therefore the third range of up to 300 picocuries per gram is selected as a range which would not cause members of the general public to receive radiation exposure approaching the values set in references *1-4*. Concentrations of cobalt-60 up to 300 picocuries per gram are so low that the AEC does not require those who might possess them to be licensed. If concentrations higher than 300 picocuries per gram were to persist over substantial areas of a harbor bottom, further monitoring would be performed to determine if any of this radioactivity were being taken up by marine life for eventual consumption in food. Because of the low concentrations noted in table 4, monitoring of radioactivity in marine life has not been necessary as part of the routine environmental monitoring programs in these harbors.

Estimates of the radiation exposure to members of the general public from radioactivity discharged into river and harbor waters and sediment have been made as discussed in references *21-22*, by analyzing the pathways whereby radioactivity might be transmitted from the marine environment to man. These analyses considered direct exposure to sediment

such as along shorelines and by drinking harbor water, and indirect exposure by consumption of bottom feeding fish or shellfish. These analyses showed that personnel exposure from this radioactivity would be far too low to measure and could only be estimated. Based on radioactivity discharges of the amounts and concentrations reported in table 1 of this report, the maximum radiation exposure in a year to any member of the general public would be less than 0.01 millirem. This is less than one ten thousandth of the average annual exposure of 125 millirems (*7*) to members of the general public from natural radioactivity and less than the exposure from medical diagnostic x-rays. Thus the radioactivity discharged into harbors from the Naval nuclear propulsion program has not caused significant radiation exposure to the general public.

For comparison, references *23-24* contain evaluations by AEC laboratories of the effects on the environment from the accumulation near points of discharge of radionuclides from several nuclear reactors. These reports conclude for these other reactors that radioactivity levels much greater than shown in table 4 have caused no significant radiation exposure to the general public.

In all monitored harbors, shoreline areas uncovered at low tide are surveyed twice a year for radiation levels with sensitive radiation detectors to determine if any radioactivity from bottom sediment washed ashore. All results were the same as background radiation levels in these regions, approximately 0.01 millirem per hour. Thus there is no evidence in these ports that radioactivity from sediment is washing ashore.

Film badges are continuously posted at locations outside the boundaries of areas where radioactive work is performed. These films showed radiation exposure to the general public outside these facilities was not above that received from natural background radiation levels.

Naval nuclear reactors and their support facilities are designed to ensure that there are no significant discharges of radioactivity in airborne exhausts. Radiological controls are exercised in support facilities to preclude exposure of working personnel to airborne radioactivity exceeding limits such as specified in reference (*1*). Further, all air exhausted from these facilities is passed through high efficiency particulate air filters and monitored during discharge. There were no discharges of airborne radioactivity above concentrations normally present in the atmosphere.

In addition to the locations listed in table 4, environmental monitoring is performed by U.S. Navy submarine tenders which serve as operating bases for U.S. Naval nuclear-powered submarines in Rota, Spain, and Holy Loch, Scotland. Results of the surveys in the harbor at Rota, Spain, have not shown detectable cobalt-60 in harbor bottom sediment samples. In 1965 in Holy Loch, more cobalt-60 radioactivity than expected was detected in harbor bottom sediment and on shoreline mud flat areas uncovered at low tide. However, there had been no increase of harbor water radioactivity in Holy Loch above normal background levels. Joint United States and British assessments of survey results confirmed that radiation levels in the vicinity of the Holy Loch anchorage were far below those which were at all likely to cause an individual to receive radiation exposure approaching limits for members of the general public. Environmental monitoring during 1971 showed radioactivity levels in Holy Loch are steadily declining and are now less than half of the levels in 1965.

Monitoring of harbor water and sediment has also been performed in Sasebo Harbor, Japan. In 1968 a Japanese boat monitoring for radioactivity near a U.S. Naval nuclear-powered ship recorded transient abnormal radiation readings. The anomalous readings did not recur on prompt return to the same area. Separate United States and Japanese analyses of water and sediment samples showed no radioactivity attributable to nuclear propulsion plants. The nuclear-powered ships had not discharged any radioactivity. Joint Japanese and United States assessments of the data from the monitoring boat concluded that even if the anomalous readings had been caused by discharges from the nuclear-powered ship, no significant radiation exposure to the public would have resulted.

Conclusions

1. The total radioactivity discharged into all ports and harbors from the U.S. Naval nuclear propulsion program was less than 0.002 curie in 1971.

2. No increase of radioactivity above normal background levels has been detected in harbor water where U.S. Naval nuclear-powered ships are based, overhauled, or constructed.

3. Discharges of liquid wastes from U.S. Naval nuclear-powered ships have not caused a measurable increase in the general background radioactivity of the environment.

4. Low-level cobalt-60 radioactivity in harbor bottom sediment is detectable around a few piers at operating bases and shipyards where nuclear-powered ship maintenance and overhauls have been conducted over a period of several years. Cobalt-60 is not detectable above background levels in general harbor bottom areas away from these piers. Maximum total radioactivity observed in a U.S. harbor of less than one curie of cobalt-60 is small compared to the naturally occurring radioactivity. Comparison to previous environmental monitoring data summarized in references *8* to *13* shows that these environmental cobalt-60 levels have been steadily decreasing.

5. Procedures used by the Navy to control discharges of radioactivity from U.S. Naval nuclear-powered ships and their support facilities have been effective in protecting the environment and the health and safety of the general public.

REFERENCES

(*1*) Code of Federal Regulations, Title 10 (Atomic Energy Commission) Part 20, Standards for protection against radiation.

(*2*) NATIONAL COUNCIL ON RADIATION PROTECTION AND MEASUREMENTS. Maximum permissible body burdens and maximum permissible concentrations of radionuclides in air and in water for occupational exposure, Report No. 22. NBS Handbook 69, National Bureau of Standards (June 1959).

(*3*) INTERNATIONAL COMMISSION ON RADIOLOGICAL PROTECTION. Recommendations of the International Commission on Radiological Protection, Report of Committee II on permissible dose for internal radiation (1959); 1962 supplement in ICRP Publication 6; Recommendations on radiation exposure, ICRP Publication 9 (1965); and ICRP Publication 7 (1965), amplifying specific recommendations of Publication 9 concerning environmental monitoring.

(*4*) Federal Radiation Council Memoranda, approved by President Eisenhower on May 13, 1960, President Kennedy on September 20, 1961, and President Johnson on July 31, 1964.

(*5*) NATIONAL ACADEMY OF SCIENCES—NATIONAL RESEARCH COUNCIL. Radioactive waste disposal from nuclear-powered ships, Publication 658. National Research Council, Washington, D.C. (1959).

(*6*) INTERNATIONAL ATOMIC ENERGY AGENCY. Radioactive waste disposal into the sea, Safety Series No. 5, Vienna (1961).

(*7*) NATIONAL COUNCIL ON RADIATION PROTECTION AND MEASUREMENTS. Basic radiation protection criteria, Report No. 39 (January 1971).

(*8*) VAUGHAN, J. W. and M. E. MILES. Disposal of radioactive wastes from U.S. Naval nuclear-powered ships and their support facilities, 1965. Radiol Health Data Rep 7:257–262 (May 1966).

(*9*) MILES, M. E. and J. J. MANGENO. Disposal of radioactive wastes from U.S. Naval nuclear-powered ships and their support facilities, 1966. Radiol Health Data Rep 8:699–701 (December 1967).

(*10*) MILES, M. E. and J. J. MANGENO. Disposal of radioactive wastes from U.S. Naval nuclear-powered ships and their support facilities, 1967. Radiol Health Data Rep 10:135–138 (April 1969).

(*11*) MILES, M. E. and J. J. MANGENO. Disposal of radioactive wastes from U.S. Naval nuclear-powered ships and their support facilities, 1968. Radiol Health Data Rep 10:375–377 (September 1969).

(*12*) MANGENO, J. J. and M. E. MILES. Disposal of radioactive wastes from U.S. Naval nuclear-powered ships and their support facilities, 1969. Radiol Health Data Rep 11:373–377 (August 1970).

(*13*) MILES, M. E., J. J. MANGENO, and R. D. BURKE. Environmental monitoring and disposal of radioactive wastes from U.S. Naval nuclear-powered ships and their support facilities, 1970. Radiol Health Data Rep 12:235–244 (May 1971).

(*14*) JACOBS, D. G. Sources of tritium and its behavior upon release to the environment, TID–24635. U.S. Atomic Energy Commission (1968).

(*15*) LOGSDON, J. E. and R. I. CHISSLER. Radioactive waste discharges to the environment from nuclear power facilities, BRH/DER 70–2. National Technical Information Service, Springfield, Va. (March 1970).

(*16*) LOGSDON, J. E. Radioactive waste discharges to the environment from nuclear power facilities. Radiation Data Rep 13:117–129 (March 1972).

(*17*) COUNCIL ON ENVIRONMENTAL QUALITY. Report to President Nixon—Ocean Dumping; a national policy (October 1970).

(*18*) CAHILL, D. F., D. C. McCURRY, and W. D. BREAKFIELD. Radiological survey of major California nuclear ports, PH178728. National Technical Information Service, Springfield, Va. (January 1968).

(*19*) HARVEY, Jr., H. D., E. D. TOERBER and J. A. GORDON. Radiological survey of Hampton Roads (Norfolk—Newport News), Virginia, No. AD683208. National Technical Information Service, Springfield, Va. (January 1968).

(*20*) CAHILL, D. F., H. D. HARVEY, Jr., D. C. McCURRY, W. D. BREAKFIELD, A. A. MOGHISSI, D. L. NORWOOD, N. E. CHILDS, and J. E. REGNIER. Radiological Surveys of Pearl Harbor, Hawaii, and environs, 1966–1968. Radiation Data Rep 13: 323–334 (June 1972).

(*21*) NATIONAL ACADEMY OF SCIENCES—NATIONAL RESEARCH COUNCIL. Radioactivity in the Marine Environment. (1971).
(*22*) EISENBUD, M. Environmental aspects of nuclear power station, Review of USA Power Reactor Operating Experience, IAEA–SM–146/55. International Atomic Energy Agency Symposium, Vienna (1971).
(*23*) OAK RIDGE NATIONAL LABORATORY. Clinch River study, ORNL–4035. Oak Ridge National Laboratory, Oak Ridge, Tenn. (April 1967).
(*24*) BATTELLE MEMORIAL INSTITUTE, PACIFIC NORTHWEST LABORATORY. Evaluation of radiological conditions in the vicinity of Hanford for 1969, BNWL–1505 (November 1970); and previous periodic reports in conjunction with report by NELSON, J. L., R. W. PERKINS, J. M. NIELSEN, and W. L. HAUSHILD, IAEA Symposium on disposal of radioactive wastes into seas, oceans, and surface waters. Vienna (May 1966) p. 139.

SECTION I. MILK AND FOOD

Milk Surveillance, May 1972

Although milk is only one of the sources of dietary intake of environmental radioactivity, it is the food item that is most useful as an indicator of the general population's intake of radionuclide contaminants resulting from environmental releases. Fresh milk is consumed by a large segment of the population and contains several of the biologically important radionuclides that may be released to the environment from nuclear activities. In addition, milk is produced and consumed on a regular basis, is convenient to handle and analyze, and samples representative of general population consumption can be readily obtained. Therefore, milk sampling networks have been found to be an effective mechanism for obtaining information on current radionuclide concentrations and long-term trends. From such information, public health agencies can determine the need for further investigation or corrective public health action.

The Pasteurized Milk Network (PMN) sponsored by the Office of Radiation Programs, Environmental Protection Agency, and the Office of Food Sanitation, Food and Drug Administration, Public Health Service, consists of 63 sampling stations: 61 located in the United States, one in Puerto Rico, and one in the Canal Zone. Many of the State health departments also conduct local milk surveillance programs which provide more comprehensive coverage within the individual State. Data from 15 of these State networks are reported routinely in *Radiation Data and Reports*. Additional networks for the routine surveillance of radioactivity in milk in the Western Hemisphere and their sponsoring organizations are:

Pan American Milk Sampling Program (Pan American Health Organization and U.S. Environmental Protection Agency)—5 sampling stations

Canadian Milk Network (Radiation Protection Division, Canadian Department of National Health and Welfare)—16 sampling stations

The sampling locations that make up the networks presently reporting in *Radiation Data and Reports* are shown in figure 1. Based on the similar purpose for these sampling activities, the present format integrates the complementary data that are routinely obtained by these several milk networks.

Radionuclide and element coverage

Considerable experience has established that relatively few of the many radionuclides that are formed as a result of nuclear fission become incorporated in milk (*1*). Most of the possible radiocontaminants are eliminated by the selective metabolism of the cow, which restricts gastrointestinal uptake and secretion into the milk. The five fission-product radionuclides which commonly occur in milk are strontium-89, strontium-90, iodine-131, cesium-137, and barium-140. A sixth radionuclide, potassium-40, occurs naturally in 0.0118 percent (*2*) abundance of the element potassium, resulting in a specific activity for potassium-40 of 830 pCi/g total potassium.

Two stable elements which are found in milk, calcium and potassium, have been used as a means for assessing the biological behavior of metabolically similar radionuclides (radio-

Figure 1. Milk sampling networks in the Western Hemisphere

strontium and radiocesium, respectively). The contents of both calcium and potassium in milk have been measured extensively and are relatively constant. Appropriate values and their variations, expressed in terms of 2 standard deviations (2σ), for these elements are 1.16 ± 0.08 g/liter for calcium and 1.51 ± 0.21 g/liter for potassium. These figures are averages of data from the PMN for May 1963-March 1966 (*3*) and are used for general radiation calculations.

Accuracy of data from various milk networks

In order to combine data from the international, national, and State networks considered in this report, it was first necessary to determine the accuracy with which each laboratory is making its determination and the agreement of the measurements among the laboratories. The Analytical Quality Control Service of the Office of Radiation Programs conducts periodic studies to assess the accuracy of determinations of radionuclides in milk performed by interested radiochemical laboratories. The generalized procedure for making such a study has been outlined previously (*4*).

The most recent study was conducted during July 1971 with 37 laboratories participating in an experiment on a milk sample containing known concentrations of iodine-131, cesium-137, strontium-89, and strontium-90 (*5*). Of the 17 laboratories producing data for the networks reporting in *Radiation Data and Reports,* 14 participated in the experiment.

The accuracy results of this experiment for these 14 laboratories are shown in table 1. Considerable improvement has been made in the accuracy of the analyses of all radionuclides compared to the results of previous studies. Some improvement is still needed in the technique for determining the strontium-90 results. These possible differences should be kept in mind when considering the integration of data from the various networks.

Development of a common reporting basis

Since the various networks collect and analyze samples differently, a complete understanding of several parameters is useful for interpreting the data. Therefore, the various milk surveillance networks that report regularly were surveyed for information on analytical methods, sampling and analysis frequencies, and estimated analytical errors associated with the data.

In general, radiostrontium is collected by an ion-exchange technique and determined by beta-particle counting in low-background detectors, and the gamma-ray emitters (potassium-40, iodine-131, cesium-137, and barium-140) are determined by gamma-ray spectroscopy of whole milk. Each laboratory has its own modifications and refinements of these basic methodologies.

Many networks collect and analyze samples on a monthly basis. Some collect samples more frequently but composite the several samples for one analysis, while others carry out their analyses more often than once a month. Many networks are analyzing composite samples on a quarterly basis for certain nuclides. The frequency of collection and analysis varies not only among the networks but also at different stations within some of the networks. In addition, the frequency of collection and analysis is a function of current environmental levels. The number of samples analyzed at a particular sampling station under current conditions is

Table 1. Distribution of mean results, quality control experiment

Isotope and known concentration	Number of laboratories in each category				Experimental 2σ error (pCi/liter)
	Acceptable[a]	Warning level[b]	Unacceptable[c]	Total	
Iodine-131 (69 pCi/liter)	13 (100%)	0	0	13	6
Cesium-137 (52 pCi/liter)	12 (92%)	1 (8%)	0	13	6
Strontium-89 (31 pCi/liter)	9 (90%)	1 (10%)	0	10	6
Strontium-90 (41.6 pCi/liter)	9 (69%)	1 (8%)	3 (23%)	13	2.4

[a] Measured concentration equal to or within 2σ of the known concentration.
[b] Measured concentration outside 2σ and equal to or within 3σ of the known concentration.
[c] Measured concentration outside 3σ of the known concentration.

reflected in the data presentation. Current levels for strontium-90 and cesium-137 are relatively stable over short periods of time, and sampling frequency is not critical. For the short-lived radionuclides, particularly iodine-131, the frequency of analysis is critical and is generally increased at the first measurement or recognition of a new influx of this radionuclide.

The data in table 2 shows whether raw or pasteurized milk was collected. An analysis (*7*) of raw and pasteurized milk samples collected during January 1964 to June 1966 indicated that for relatively similar milkshed or sampling areas, the differences in concentration of radionuclides in raw and pasteurized milk are not statistically significant (*7*). Particular attention was paid to strontium-90 and cesium-137 in that analysis.

Practical reporting levels were developed by the participating networks, most often based on 2-standard-deviation counting errors or 2-standard-deviation total analytical errors from replicate analyses (*3*). The practical reporting level reflects analytical factors other than statistical radioactivity counting variations and will be used as a practical basis for reporting data.

The following practical reporting levels have been selected for use by all networks whose practical reporting levels were given as equal to or less than the given value.

Radionuclide	Practical reporting level (pCi/liter)
Strontium-89	5
Strontium-90	2
Iodine-131	10
Cesium-137	10
Barium-140	10

Some of the networks gave practical reporting levels greater than those above. In these cases the larger value is used so that only data considered by the network as meaningful will be presented. The practical reporting levels apply to the handling of individual sample determinations. The treatment of measurements equal to or below these practical reporting levels for calculation purposes, particularly in calculating monthly averages, is discussed in the data presentation.

Analytical error or precision expressed as pCi/liter or percent in a given concentration range has also been reported by the networks (*3*). The precision errors reported for each of the radionuclides fall in the following ranges:

Radionuclide	Analytical errors of precision (2 standard deviations)
Strontium-89	1–5 pCi/liter for levels <50 pCi/liter; 5–10% for levels ≥50 pCi/liter;
Strontium-90	1–2 pCi/liter for levels <20 pCi/liter; 4–10% for levels ≥20 pCi/liter;
Iodine-131, Cesium-137, Barium-140	4–10 pCi/liter for levels <100 pCi/liter; 4–10% for levels ≥100 pCi/liter.

For iodine-131, cesium-137, and barium-140, there is one exception for these precision error ranges: 25 pCi/liter at levels <100 pCi/liter for Colorado. This is reflected in the practical reporting level for the Colorado milk network.

Federal Radiation Council guidance applicable to milk surveillance

In order to place the U.S. data on radioactivity in milk presented in *Radiation Data and Reports* in perspective, a summary of the guidance provided by the Federal Radiation Council for specific environmental conditions was presented in the December 1970 issue of *Radiological Health Data and Reports.*

Data reporting format

Table 2 presents the integrated results of the international, national, and State networks discussed earlier. Column 1 lists all the stations which are routinely reported to *Radiation Data and Reports.* The relationship between the PMN stations and the State stations is shown in figure 2. The first column in table 2 under each of the reported radionuclides gives the monthly average for the station and the number of samples analyzed in that month in parentheses. When an individual sampling result is equal to or below the practical reporting level for the radionuclide, a value of zero is used for

Table 2. Concentrations of radionuclides in milk for May 1972 and 12-month period June 1971 through May 1972

Sampling location		Type of sample[a]	Radionuclide concentration (pCi/liter)			
			Strontium-90		Cesium-137	
			Monthly average[b]	12-month average	Monthly average[b]	12-month average
UNITED STATES:						
Ala:	Montgomery[c]	P	NA	7	16	9
Alaska:	Palmer[c]	P	4	5	0	11
Ariz:	Phoenix[c]	P	NA	0	0	0
Ark:	Little Rock[c]	P	NA	12	0	10
Calif:	Sacramento[c]	P	NA	1	0	0
	San Francisco[c]	P	NA	3	0	0
	Del Norte	P	12	11	11	9
	Fresno	P	3	2	0	5
	Humboldt	P	4	3	0	7
	Los Angeles	P	3	2	0	4
	Mendocino	P	5	5	0	6
	Sacramento	P	3	2	0	6
	San Diego	P	0	1	0	5
	Santa Clara	P	2	2	0	7
	Shasta	P	3	3	0	8
	Sonoma	P	4	2	0	7
Colo:	Denver[c]	P	NA	5	0	7
	East	R	[d]		NS	[e]0
	Northeast	R	[d]		NS	1
	Northwest	R	[d]		[e]0	[e]0
	South Central	R	[d]		NS	NS
	Southeast	R	[d]		NS	[e]0
	Southwest	R	[d]		[e]0	2
	West	R	[d]		[e]0	[e]0
Conn:	Hartford[c]	P	NA	6	0	8
	Central	P	5	7	15	14
Del:	Wilmington[c]	P	NA	8	13	5
D.C:	Washington[c]	P	NA	7	0	7
Fla:	Tampa[c]	P	5	5	41	41
	Central	R	3	5	37	43
	North	R	3	9	14	23
	Northeast	R	8	7	44	37
	Southeast	R	5	6	53	56
	Tampa Bay area	P	3	5	44	39
	West	R	10	10	20	19
Ga:	Atlanta[c]	P	NA	9	11	15
Hawaii:	Honolulu[c]	P	4	3	0	3
Idaho:	Idaho Falls[c]	P	4	5	0	0
Ill:	Chicago[c]	P	6	7	16	12
Ind:	Indianapolis[c]	P	NA	7	0	4
	Central	P	7	7	15	13
	Northeast	P	7	7	15	15
	Northwest	P	8	8	15	16
	Southeast	P	7	8	5	16
	Southwest	P	9	8	15	17
Iowa:	Des Moines[c]	P	NA	4	0	2
	Iowa City	P	6	7	23	11
	Des Moines	P	7	6	12 (2)	10
	Little Cedar	P	NS	7	NS	12
	Spencer	P	5	6	17	12
Kans:	Wichita[c]	P	NA	8	0	2
	Coffeyville	P	7	8	0	13
	Dodge City	P	4	5	14	10
	Falls City, Nebr	R	10	3	13	8
	Hays	P	4	10	0	9
	Kansas City	P	7	8	11	11
	Topeka	P	10	8	14	8
	Wichita	P	7	9	11	10
Ky:	Louisville[c]	P	NA	8	0	8
La:	New Orleans[c]	P	10	14	0	14
Maine:	Portland[c]	P	NA	7	22	21
Md:	Baltimore[c]	P	NA	8	0	5
Mass:	Boston[c]	P	7	7	15	11
Mich:	Detroit[c]	P	NA	7	15	11
	Grand Rapids[c]	P	NA	8	16	10
	Bay City	P	3	5	16 (2)	15
	Charlevoix	P	5	9	14 (4)	15
	Detroit	P	6	6	19	11
	Grand Rapids	P	5	6	13	9
	Lansing	P	4	7	15	16
	Marquette	P	7	8	24 (3)	24
	Monroe	P	4	3	0 (2)	4
	South Haven	P	4	6	12 (4)	10
Minn:	Minneapolis[c]	P	NA	8	17	17
	Bemidji	P	4	8	19	19
	Duluth	P	15	16	23	29
	Fergus Falls	P	6	8	16	17
	Little Falls	P	16	16	30	30
	Mankato	P	6	6	11	11
	Minneapolis	P	10	12	20	17

Footnotes at end of table.

Table 2. Concentrations of radionuclides in milk for May 1972 and 12-month period June 1971 through May 1972—continued

Sampling location		Type of sample[a]	Radionuclide concentration (pCi/liter)			
			Strontium-90		Cesium-137	
			Monthly average[b]	12-month average	Monthly average[b]	12-month average
UNITED STATES:—continued						
Minn:	Rochester	P	7	8	14	14
	Worthington	P	4	6	11	12
Miss:	Jackson[c]	P	NA	12	15	11
Mo:	Kansas City[c]	P	NA	8	0	6
	St. Louis[c]	P	NA	5	0	5
Mont:	Helena[c]	P	NA	6	0	8
Nebr:	Omaha[c]	P	NA	7	0	3
Nev:	Las Vegas[c]	P	NA	2	0	1
N.H:	Manchester[c]	P	NA	8	18	18
N.J:	Trenton[c]	P	NA	7	0	8
N. Mex:	Albuquerque[c]	P	NA	3	0	0
N.Y:	Buffalo[c]	P	6	7	14	7
	New York City[c]	P	NA	7	14	10
	Syracuse[c]	P	NA	7	13	8
	Albany	P	6	6	*0	*0
	Buffalo	P	NS	NS	*0	*0
	Massena	P	13	8	11	*0
	New York City	P	5	6	13	*0
	Syracuse	P	9	5	*0	*0
N.C:	Charlotte[c]	P	NA	11	0	11
N. Dak:	Minot[c]	P	NA	9	15	14
Ohio:	Cincinnati[c]	P	NA	6	15	4
	Cleveland[c]	P	NA	7	19	7
Okla:	Oklahoma City[c]	P	NA	7	13	8
Oreg:	Portland[c]	P	5	5	12	6
	Baker	P	NA		0	0
	Coos Bay	P	NA		0	3
	Eugene	P	NA		0	2
	Medford	P	NA		0	4
	Portland composite	P	NA		0	9
	Portland local	P	NA		0	11
	Redmond	P	NA		0	0
	Tillamook	P	NA		0	13
Pa:	Philadelphia[c]	P	NA	7	14	5
	Pittsburgh[c]	P	NA	10	13	8
	Dauphin	P	4	7	22	13
	Erie	P	0	7	8	13
	Philadelphia	P	5	4	13	14
	Pittsburgh	P	8	6	19	15
R.I:	Providence[c]	P	NA	8	15	12
S.C:	Charleston[c]	P	8	9	0	15
S. Dak:	Rapid City[c]	P	NA	6	12	7
Tenn:	Chattanooga[c]	P	NA	8	18	11
	Memphis[c]	P	NA	7	0	5
	Chattanooga	P	10	10	0	12
	Clinton	R	8	9	16 (2)	15
	Fayetteville	P	10	9	7 (2)	6
	Kingston	R	12	9	6 (2)	11
	Knoxville	P	8	8	0 (2)	10
	Lawrenceburg	R	8	8	17	9
	Nashville	P	8	8	14	9
	Pulaski	R	5	8	10 (2)	7
	Sequoyah	R	8	8	14	19
Tex:	Austin[c]	P	NA	1	0	0
	Dallas[c]	P	NA	6	0	2
	Amarillo	R	NA		NA	
	Corpus Christi	R	NA		NA	
	El Paso	R	NA		NA	
	Fort Worth	R	NA		NA	
	Harlingen	R	NA		NA	
	Houston	R	NA		NA	
	Lubbock	R	NA		NA	
	Midland	R	NA		NA	
	San Antonio	R	NA		NA	
	Texarkana	R	NA		NA	
	Uvalde	R	NA		NA	
	Wichita Falls	R	NA		NA	
Utah:	Salt Lake City[c]	P	0	5	0	8
Vt:	Burlington[c]	P	NA	5	16	12
Va:	Norfolk[c]	P	NA	8	15	7
Wash:	Seattle[c]	P	NA	4	0	6
	Spokane[c]	P	NA	6	15	9
	Benton County	R	0	1	0	0
	Franklin County	R	NS	1	NS	4
	Longview[c]	R	8		0	
	Sandpoint, Idaho	R	9	12	0	0
	Skagit County	R	10	8	0	0
W. Va:	Charleston[c]	P	NA	8	0	5
Wisc:	Milwaukee[c]	P	NA	6	14	5
Wyo:	Laramie[c]	P	NA	3	0	2

Footnotes at end of table.

Table 2. Concentrations of radionuclides in milk for May 1972 and 12-month period June 1971 through May 1972—continued

Sampling location	Type of sample[a]	Radionuclide concentration (pCi/liter)			
		Strontium-90		Cesium-137	
		Monthly average[b]	12-month average	Monthly average[b]	12-month average
CANADA:					
Alberta: Calgary	P	NA		19	19
Edmonton	P	NA		22	24
British Columbia: Vancouver	P	NA		19	26
Manitoba: Winnipeg	P	NA		20	23
New Brunswick: Fredericton	P	NA		21	21
Newfoundland: St. John's	P	NA		18	31
Nova Scotia: Halifax	P	NA		21	25
Ontario: Ottawa	P	NA		11	13
Sault Ste. Marie	P	NA		24	31
Thunder Bay	P	NA		28	26
Toronto	P	NA		NS	
Windsor	P	NA		7	10
Quebec: Montreal	P	NA		11	16
Quebec	P	NA		26	28
Saskatchewan: Regina	P	NA		19	17
Saskatoon	P	NA		16	19
CENTRAL AND SOUTH AMERICA:					
Canal Zone: Cristobal[c]	P	NA	0	21	6
Chile: Santiago	P	0	0	0	2
Colombia: Bogota	P	0	1	0	0
Ecuador: Guayaquil	P	0	0	0	0
Jamaica: Mandeville	P	3	4	40	64
Puerto Rico: San Juan[c]	P	NA	3	13	8
Venezuela: Caracas	P	0	0	0	0
PMN network average[f]		5	6	8	8

[a] P, Pasteurized milk.
R, Raw milk.

[b] When an individual sampling result was equal to or less than the practical reporting level, a value of "0" was used for averaging. Monthly averages less than the practical reporting level reflect the fact that some but not all of the individual samples making up the average contained levels greater than the practical reporting level. When more than one analysis was made in a monthly period, the number of samples in the monthly average is given in parentheses.

[c] Pasteurized Milk Network station. All other sampling locations are part of the State or National network.

[d] Radionuclide analysis not routinely performed.

[e] The practical reporting levels for these networks differ from the general ones given in the text. Sampling results for the networks were equal to or less than the following practical reporting levels:
Iodine-131: Colorado—25 pCi/liter; Michigan—14 pCi/liter; Oregon—15 pCi/liter
Cesium-137: Colorado—25 pCi/liter; New York—20 pCi/liter; Oregon—15 pCi/liter
Strontium-90: New York—3 pCi/liter

[f] This entry gives the average radionuclide concentrations for the PMN stations denoted by footnote [c].

[g] New station added May 1972 as part of Trojan Nuclear Power Plant preoperational surveillance.

NA, no analysis.
NS, no sample collected.

averaging. Monthly averages are calculated using the above convention. Averages which are equal to or less than the practical reporting levels reflect the presence of radioactivity in some of the individual samples greater than the practical reporting level.

The second column under each of the radionuclides reported gives the 12-month average for the station as calculated from the preceding 12 monthly averages, giving each monthly average equal weight. Since the daily intake of radioactivity by exposed population groups, averaged over a year, constitutes an appropriate criterion for the case where the FRC radiation protection guides apply, the 12-month average serves as a basis for comparison.

Discussion of current data

In table 2, surveillance results are given for strontium-90 and cesium-137 for May 1972 and the 12-month period, June 1971 to May 1972. Except where noted, the monthly average rep-

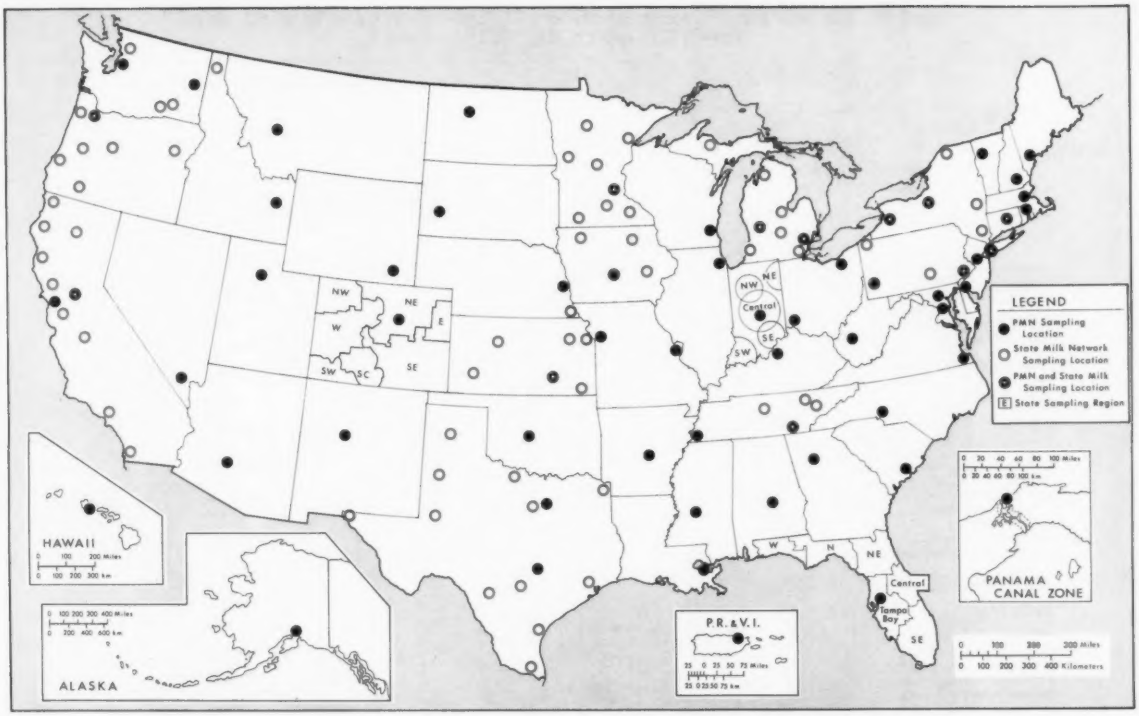

Figure 2. State and PMN milk sampling stations in the United States

resents a single sample for the sampling station. Strontium-89, iodine-131, and barium-140 data have been omitted from table 2 since levels at the great majority of the stations for May 1972 were below the respective practical reporting levels. Table 3 gives monthly averages for these stations at which strontium-89, iodine-131, and barium-140 were detected.

Strontium-90 monthly averages ranged from 0 to 16 pCi/liter in the United States for May 1972, and the highest 12-month average was 16 pCi/liter (Duluth, Little Falls, Minn.) representing 8.0 percent of the Federal Radiation Council radiation protection guide. Cesium-137 monthly averages ranged from 0 to 53 pCi/liter in the United States for May 1972, and the highest 12-month average was 56 pCi/liter (Southeast, Fla.) representing 1.6 percent of the value derived from the recommendations given in the Federal Radiation Council report. Of particular interest are the consistently higher cesium-137 levels that have been observed in Florida (*8*) and Jamaica.

Table 3. Strontium-89, iodine-131, and barium-140 in milk, May 1972

Sampling location		Concentration (pCi/liter)		
		Strontium-89	Iodine-131	Barium-140
Calif:	Del Norte (State)	5		
Colo:	Northwest (State)			29
Kans:	Coffeyville (State)	7		11
	Dodge City (State)	5		
	Hays (State)	5		
	Kansas City (State)	7	10	15
La:	New Orleans (PMN)	11		
Tenn:	Clinton (State)	6		
	Fayetteville (State)	6		
	Nashville (State)		12	

Acknowledgment

Appreciation is expressed to the personnel of the following agencies who provide data from their milk surveillance networks:

Bureau of Radiological Health
Division of Environmental Sanitation
California State Department of Health

Radiation Protection Division
Canadian Department of National Health and Welfare

Radiological Health Section
Division of Occupational and Radiological Health
Colorado Department of Health

Radiological Health Services
Division of Medical Services
Connecticut State Department of Health

Radiological and Occupational Health Section
Department of Health and Rehabilitative Services
State of Florida

Bureau of Environmental Sanitation
Division of Sanitary Engineering
Indiana State Board of Health

Division of Radiological Health
Environmental Engineering Services
Iowa State Department of Health

Radiation Control Section
Environmental Health Division
Kansas State Department of Health

Radiological Health Services
Division of Occupational Health
Michigan Department of Health

Radiation Control Section
Division of Environmental Health
State of Minnesota Department of Health

Bureau of Radiological Pollution Control
New York State Department of Environmental Conservation

Environmental Radiation Surveillance Program
Division of Sanitation and Engineering
Oregon State Board of Health

Radiological Health Section
Bureau of Environmental Health
Pennsylvania Department of Public Health

Radiological Health Services
Division of Preventable Diseases
Tennessee Department of Public Health

Division of Occupational Health
Environmental Health Services
Texas State Department of Health

Radiation Control Section
Division of Health
Washington Department of Social and Health Services

REFERENCES

(1) CAMPBELL, J. E., G. K. MURTHY, A. S. GOLDIN, H. B. ROBINSON, C. P. STRAUB, F. J. WEBER and K. H. LEWIS. The occurrence of strontium-90, iodine-131, and other radionuclides in milk, May 1957 through April 1958. Amer J Pub Health 49:225 (February 1969).
(2) U.S. ATOMIC ENERGY COMMISSION, DIVISION OF ISOTOPES DEVELOPMENT. Chart of the Nuclides, Tenth Edition revised to December 1968. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.
(3) NATIONAL CENTER FOR RADIOLOGICAL HEALTH. Section I. Milk Surveillance. Radiol Health Data Rep 9:730–746 (December 1968).
(4) ROSENSTEIN, M. and A. S. GOLDIN. Statistical technics for quality control of environmental radioassay. Health Lab Sci 2:93 (April 1965).
(5) KNOWLES, F. Interlaboratory study of iodine-131, cesium-137, strontium-89 and strontium-90 measurements in milk, July 1971, Technical experiment 71-MKAQ-1. Analytical Quality Control Service, Office of Radiation Programs, EPA, Washington, D.C. 20460 (December 1971).
(6) NEILL, R. H. and D. R. SNAVELY. State Health Department sampling criteria for surveillance of radioactivity in milk. Radiol Health Data Rep 8:621–627 (November 1967).
(7) ROBINSON, P. B. A comparison of results between the Public Health Service Raw Milk and Pasteurized Milk Networks for January 1964 through June 1966. Radiol Health Data Rep 9:475–488 (September 1968).
(8) PORTER, C. R., C. R. PHILLIPS, M. W. CARTER and B. KAHN. The cause of relatively high cesium-137 concentrations in Tampa, Florida, milk. Radioecological Concentration Processes, Proceedings of an International Symposium held in Stockholm, April 25–29, 1966. Pergamon Press, New York, N.Y. (1966) pp. 95–101.

Food and Diet Surveillance

Efforts are being made by various Federal and State agencies to estimate the dietary intake of selected radionuclides on a continuing basis. These estimates, along with the guidance developed by the Federal Radiation Council, provide a basis for evaluating the significance of radioactivity in foods and diet.

Networks presently in operation and reported routinely include those listed below. These networks provide data useful for developing estimates of nationwide dietary intakes of radionuclides. Programs reported in *Radiation Data and Reports* are as follows:

Program	Period reported	Issue
California Diet Study	July-December 1970	November 1971
Carbon-14 in Total Diet and Milk	July-December 1971	May 1972
Connecticut Standard Diet	January-December 1970	December 1971
Institutional Total Diet	October-December 1971 and 1971 Annual Summary	June 1972
Radiostrontium in Milk	January-December 1970	April 1972
Strontium-90 in Tri-City Diets	January-December 1970	November 1971

Section II. Water

The Environmental Protection Agency and other Federal, State, and local agencies operate extensive water quality sampling and analysis programs for surface, ground, and treated water. Most of these programs include determinations of gross beta and gross alpha radioactivity and specific radionuclides.

Although the determination of the total radionuclide intake from all sources is of primary importance, a measure of the public health importance of radioactivity levels in water can be obtained by comparison of the observed values with the Public Health Service Drinking Water Standards (*1*). These standards, based on consideration of Federal Radiation Council (FRC) recommendations (*2-4*) set the limits for approval of a drinking water supply containing radium-226 and strontium-90 at 3 pCi/liter and 10 pCi/liter, respectively. Higher concentrations may be acceptable if the total intake of radioactivity from all sources remains within the guides recommended by FRC for control action. In the known absence[1] of strontium-90 and alpha-particle emitters, the limit is 1,000 pCi/liter gross beta radioactivity, except when additional analysis indicates that concentrations of radionuclides are not likely to cause exposures greater than the limits indicated by the Radiation Protection Guides. Surveillance data from a number of Federal and State programs are published periodically to show current and long-range trends. Water sampling activities reported in *Radiation Data and Reports* are listed below.

[1]Absence is taken to mean a negligibly small fraction of the specific limits of 3 pCi/liter and 10 pCi/liter for unidentified alpha-particle emitters and strontium-90, respectively.

Water sampling program	Period reported	Issue
Colorado River Basin	1968	March 1972
Interstate Carrier Drinking Water	1971	May 1972
Kansas	January-December 1970	December 1971
Michigan	January-June 1970	November 1971
North Carolina	January-December 1967	May 1969
Radioactivity in Florida Waters	1969	January 1972
Radiostrontium in Tap Water, *HASL*	January-June 1971	April 1972
Tritium in Community Water Supplies	1969	December 1970
Tritium Surveillance System	January-March 1972	August 1972
Washington	July 1969-June 1970	March 1972
New York	July-December 1970 and January-June 1971	May 1972
Radioactivity in California Waters	January-December 1970	June 1972

REFERENCES

(*1*) U.S. PUBLIC HEALTH SERVICE. Drinking water standards, revised 1962, PHS Publication No. 956. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (March 1963).

(*2*) FEDERAL RADIATION COUNCIL. Radiation Protection Guidance for Federal Agencies. Memorandum for the President, September 1961. Reprint from the Federal Register of September 26, 1961.

(*3*) FEDERAL RADIATION COUNCIL. Background material for the development of Radiation Protection Standards, Report No. 1. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (May 1960).

(*4*) FEDERAL RADIATION COUNCIL. Background material for the development of Radiation Protection Standards, Report No. 2. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (September 1961).

Gross Radioactivity in Surface Waters of the United States, January 1972

Office of Water Programs
U.S. Environmental Protection Agency

The monitoring of gross radioactivity in surface waters of the United States was initiated in 1957 as part of the Water Pollution Surveillance System (formerly National Water Quality Network) of the U.S. Public Health Service. Currently, the program is operated by the U.S. Environmental Protection Agency, Office of Water Programs. Regional offices of the Environmental Protection Agency are responsible for the collection of samples and the entering of the resulting data into the analytical storage and retrieval system. Radioactivity analyses are performed in the centralized radioactivity laboratories of the Office of Water Programs (Cincinnati, Ohio).

The regular reporting of gross radioactivity data in *Radiological Health Data and Reports* was terminated with the publication of data for October 1968 (April 1969 issue). With the publication of data for January 1971, this activity was resumed as a monthly report series. The unpublished data for the time interval of November 1968 through December 1970 will be the subject of a future summary article.

Table 1 presents the gross alpha and beta radioactivity results for samples collected from 11 rivers during January 1972. The analytical procedures used for determining gross alpha and beta radioactivity are described in the 13th Edition of *Standard Methods for the Examination of Water and Wastewater* (1). Results are reported for the date of counting and are not corrected to the date of collection. The sensitivity in counting is that defined by the National Bureau of Standards, Handbook 86 (2) and is calculated to be <0.2 pCi/liter for gross alpha radioactivity and <1 pCi/liter for gross beta radioactivity measurements.

REFERENCES

(1) AMERICAN PUBLIC HEALTH ASSOCIATION: AMERICAN WATER WORKS ASSOCIATION AND WATER POLLUTION CONTROL FEDERATION. Standard methods for the examination of water and wastewater, 13th edition, New York, N.Y. (1971).

(2) U.S. DEPARTMENT OF COMMERCE. Radioactivity, Recommendations of the International Commission on Radiological Units and Measurements (1962), NBS Handbook 86 (November 29, 1963).

Table 1. Gross radioactivity in U.S. surface waters, January 1972

River and station	Number of grab samples	Gross alpha radioactivity (pCi/liter)		Gross beta radioactivity (pCi/liter)	
		Suspended solids	Dissolved solids	Suspended solids	Dissolved solids
Clinch River:					
Kingston, Tenn	[a]4	<0.5 (<0.3,0.8)	<0.6 (<0.4,1.0)	<3 (<2,4)	5 (4,8)
Colorado River:					
DeBeque, Colo	1	.6	3.0	3	12
Above Moab, Utah	4	3.8 (1.5,6.0)	11.5 (7.0,17.1)	18 (6,23)	21 (16,26)
Below Moab, Utah	4	1.3 (.7,2.2)	8.4 (7.1,9.1)	9 (5,16)	15 (12,24)
Silt, Colo	1	.3	3.2	<2	12
Dolores River:					
Bedrock, Colo	4	4.3 (2.1,7.1)	7.0 (6.4,8.3)	14 (8,19)	13 (9,18)
Gateway, Colo	4	3.4 (1.9,5.5)	21.9 (12.3,26.8)	12 (10,14)	102 (81,118)
Green River:					
LaBarge, Wyo	2	.5 (.5, .6)	1.6 (1.1,2.1)	<2 (<2, <2)	4 (3,5)
Mississippi River:					
Burlington, Iowa	1	.4	3.3	<2	10
Ohio River:					
Cincinnati, Ohio	4	3.2 (1.1,6.4)	<.6 (<.5, .8)	11 (2,20)	4 (2,6)
Roanoke River:					
John Kerr Dam, Va	5	<.4 (<.3, .7)	<.4 (<.3, .5)	<2 (<2,4)	3 (2,4)
San Juan River:					
Bluff, Utah	1	9.4	1.7	31	13
San Miguel River:					
Naturita, Colo	4	<.5 (<.4, .6)	4.0 (2.5,6.5)	<3 (<2,5)	10 (6,13)
Uravan, Colo	4	<.4 (<.3, .5)	<3.0 (<2.1,3.8)	<2 (<2,3)	9 (7,13)
Below Uravan, Colo	4	<2.9 (<.4,8.9)	26.2 (15.7,39.3)	10 (5,23)	50 (41,60)
Susquehanna River:					
Holtwood, Penna	1	.6	.6	<2	<2
Conowingo, Md	2	<.3 (<.3, .3)	<.3 (<.2, <.5)	<2 (<2, <2)	2 (2,2)
St. Lawrence River:					
Massena, N.Y	5	<.4 (<.3, .4)	1.3 (.9,1.9)	<2 (<2, <2)	6 (4,10)

[a]Where more than one sample is analyzed during the month, the minimum and maximum are in parentheses.

Radioactivity in North Carolina Surface, Cistern, and Saline Waters, 1968–1970[1]

Sanitary Engineering Division
Radiological Health Section
North Carolina State Board of Health

The North Carolina State Board of Health maintains an Environmental Radiation Surveillance Network to monitor radioactivity in selected media throughout the State. The Program is administered by the Radiological Health Section of the Sanitary Engineering Division. Sample analysis is provided by the Environmental Sciences Section of the Laboratory Division. The Public Health Statistics Section of the Epidemiology Division provides assistance in certain data processing activity, while computer services are obtained through the Systems Management Division of the Department of Administration. Environmental sample collection is performed primarily by the staffs of municipalities and local health departments.

The program started with the surveillance of 147 sources of untreated surface waters. These supplies were selected as being representative of water quality in the many river basins of the State. Sample collection was achieved through close cooperation with municipalities and local health departments.

The program has changed through the years as technological advances in instrumentation made it possible to monitor more facets of the environment. In July 1962, cistern water samples from Ocrocoke Island were added to the surveillance program. In January 1963, airborne particulates, rainfall, and dustfall samples were collected on a routine sampling schedule over the State. The surface water program was modified to include treated water assays.

Surface water

Grab samples of both treated and untreated surface water are taken on a monthly basis at nine water treatment plants. These stations were selected to obtain samples from the State's major drainage districts with the French-Broad, Catawba, Yadkin, Cape Fear, Neuse, and Tar-Pamlico river basins being represented.

[1] Summarized from "Environmental Radiation Surveillance in North Carolina, 1968–1970."

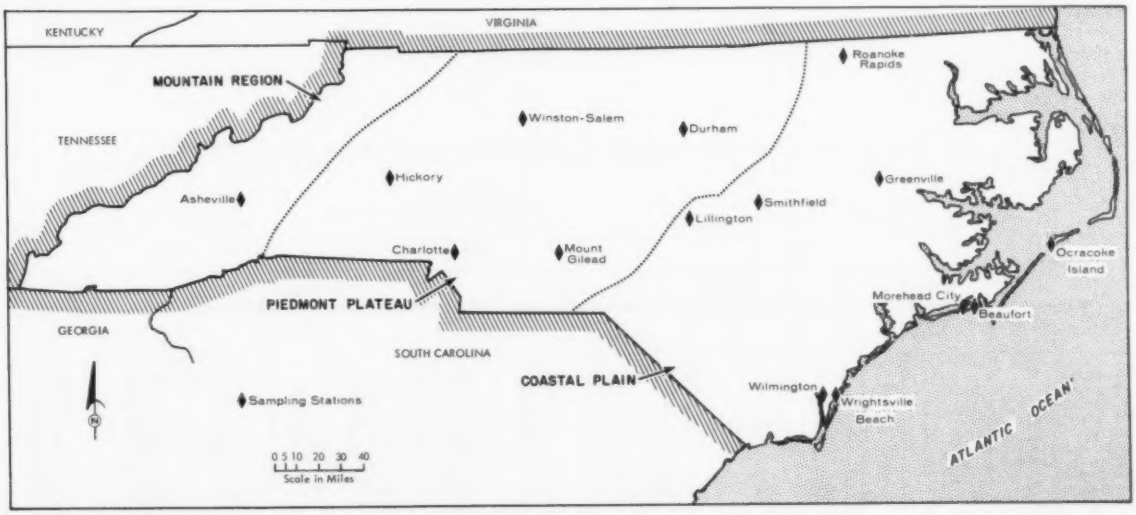

Figure 1. North Carolina water sampling stations, 1968–1970

The samples are routinely collected in 1 gallon (polyethylene) containers by the water plant operator or chemist and mailed to the State laboratory for analysis. Additional samples can be collected as needed. These stations are shown in figure 1.

Untreated water samples are acidified with hydrochloric acid to prevent loss of activity through precipitation and/or adhesion. The samples are then transferred to 3½-liter polyethylene Marinelli beakers for gamma scans.

After scanning, 1 liter is filtered through Whatman No. 12 folded filter paper. The filter paper, containing the suspended solids, is ashed in a muffled furnace at 600 degrees Centigrade. The residue is then transferred to a tared planchet, dried, weighed, and submitted for gross alpha and beta counting (*1*).

The filtrate is separted by precipitation into dissolved sulfates and dissolved carbonates, plancheted, and submitted for gross beta counting (*1*).

As with the untreated surface water, treated water samples are acidified with 2 milliliters of hydrochloric acid to prevent loss of activity through precipitation and adhesion. These samples are transferred to 3½-liter polyethylene Marinelli beakers for gamma scans. The suspended material is prepared for gross alpha and beta counting in the same manner as untreated water samples. The filtrate is carefully evaporated to determine the gross alpha and beta activity of the dissolved solids. As before, if the total gross beta is greater than 5 pCi/liter, a strontium-89 and strontium-90 determination is performed.

Table 1. Gross beta radioactivity in North Carolina raw surface water, 1968–1970

Location	Concentration (pCi/liter)											
	1968				1969				1970			
	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average
Asheville	10	3.0	<3.0	<3.0	10	3.4	<3.0	<3.0	14	<3.0	<3.0	<3.0
Charlotte	9	5.2	<3.0	3.12	12	3.2	<3.0	<3.0	13	11.6	<3.0	<3.0
Greenville	8	7.3	4.5	5.42	10	6.1	3.7	4.61	12	9.5	3.3	5.27
Hickory	10	10.7	<3.0	3.81	11	3.4	<3.0	<3.0	11	3.7	<3.0	<3.0
Lillington	10	9.7	3.7	6.17	12	7.6	3.0	5.69	12	15.3	4.5	7.36
Mt. Gilead	NS				10	4.1	<3.0	<3.0	13	5.6	<3.0	3.43
Roanoke Rapids	NS				10	4.5	<3.0	3.31	13	4.8	<3.0	3.72
Smithfield	11	9.1	4.1	6.08	11	8.3	3.1	5.72	12	7.3	3.4	5.74
Wilmington	11	9.2	4.3	5.40	12	6.4	<3.0	4.63	14	9.0	3.3	5.20
Winston-Salem	11	3.7	<3.0	<3.0	12	5.7	<3.0	3.12	12	5.1	<3.0	3.16

NS, no sample.

Table 2. Gross beta radioactivity in North Carolina treated surface water, 1968–1970

Location	Concentration (pCi/liter)											
	1968				1969				1970			
	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average
Asheville	11	3.5	<3.0	<3.0	11	<3.0	<3.0	<3.0	14	<3.0	<3.0	<3.0
Charlotte	10	3.8	<3.0	<3.0	12	3.3	<3.0	<3.0	12	3.2	<3.0	<3.0
Greenville	8	4.8	3.5	4.18	11	5.0	3.1	3.88	12	5.8	<3.0	3.98
Hickory	10	5.5	<3.0	<3.0	10	<3.0	<3.0	<3.0	11	5.0	<3.0	<3.0
Lillington	11	7.6	3.2	5.06	12	8.4	<3.0	4.32	12	7.4	<3.0	4.12
Mt. Gilead	NS				10	4.8	<3.0	<3.0	13	3.9	<3.0	<3.0
Roanoke Rapids	NS				10	3.7	<3.0	<3.0	13	4.2	<3.0	3.34
Smithfield	10	9.3	3.2	4.88	12	6.1	<3.0	3.90	12	7.3	3.1	4.93
Wilmington	10	5.1	3.2	3.96	12	4.6	<3.0	<3.0	13	4.9	<3.0	3.49
Winston-Salem	11	3.1	<3.0	<3.0	12	<3.0	<3.0	<3.0	12	<3.0	<3.0	<3.0

NS, no sample.

A summary of surface water data is provided in table 1 (untreated) and table 2 (treated).

Cistern water

A cistern supply that is used as a source of drinking water was sampled on a routine basis. The samples were collected in 1-liter polyethylene containers and shipped to the State laboratory for analysis. The sampling was discontinued after the January 1970 samples.

Samples were prepared in the same manner as untreated surface water. A data summary for cistern water is given in table 3 for samples taken on Ocracoke Island.

Sewage treatment plant effluent water

Samples are taken on a monthly basis at three sewage treatment plants. They are routinely collected by plant personnel in 1-gallon polyethylene containers and mailed to the State laboratory for analysis. Additional samples can be collected if needed. Samples are prepared in the same manner as untreated surface water.

A summary of sewage treatment plant effluent water data is provided in table 4.

Saline water

One gallon of saline water is collected and processed the same as the untreated surface samples. However, because of high solids content, only 200 milliliters is filtered for alpha and beta measurement. The gross alpha and beta radioactivity in saline water is shown in table 5.

Summary of results

All environmental radioactivity concentrations during 1968-1970 were well below the limits set for protection of the public's health. There were no significant or unexpected differences between these results and the 1967 results.

Detectable quantities of fission products were observed in many samples during the reporting period. Increases in fission product inventories correlated well with reported nuclear detonations.

Table 3. Gross alpha and beta radioactivity in cistern water Ocracoke Island, 1968–1970

Year	Gross alpha radioactivity (pCi/liter)				Gross beta radioactivity (pCi/liter)			
	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average
1968	10	<1.0	<1.0	<1.0	10	122	6.4	28.2
1969	12	<1.0	<1.0	<1.0	12	13.3	<3.0	8.9
1970	1	<1.0	<1.0	<1.0	1	7.5	7.5	7.5

Table 4. Gross alpha and beta radioactivity in sewage treatment effluent water, North Carolina, 1968–1970

Year and location	Gross alpha radioactivity (pCi/liter)				Gross beta radioactivity (pCi/liter)			
	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average
1968:								
Charlotte	4	1.3	<1.0	<1.1	4	12.4	9.7	11.2
Durham	5	1.2	<1.0	<1.1	5	39.7	10.8	24.1
Winston-Salem	6	1.4	<1.0	<1.0	6	64.0	9.5	42.3
1969:								
Charlotte	11	<1.0	<1.0	<1.0	11	13.6	6.2	10.8
Durham	9	<1.0	<1.0	<1.0	9	23.5	10.3	16.4
Winston-Salem	12	2.0	<1.0	<1.0	12	59.4	9.1	50.1
1970:								
Charlotte	11	<1.0	<1.0	<1.0	11	16.1	8.6	10.9
Durham	10	<1.0	<1.0	<1.0	10	19.9	9.6	14.1
Winston-Salem	11	2.2	<1.0	<1.0	11	59.8	44.2	51.9

Table 5. Gross alpha and beta radioactivity in saline water, North Carolina, 1968–1970

Year and location	Gross alpha radioactivity (pCi/liter)				Gross beta radioactivity (pCi/liter)			
	Number of samples	Maximum	Minimum	Average	Number of samples	Maximum	Minimum	Average
1968:								
Beaufort	2	12.8	<1.0	<6.9	2	225	167	196
Morehead City	4	18.1	<1.0	<6.6	4	302	143	215
Wrightsville	4	40.7	<1.0	<18.6	4	317	23.5	120
1969:								
Beaufort	1	3.4	3.4	3.4	1	408	408	408
Morehead City	6	8.2	<1.0	<2.2	6	379	63.6	267
Wrightsville	NS							
1970:								
Beaufort	1	<1.0	<1.0	<1.0	1	132	132	132
Morehead City	5	18.0	<1.0	<4.4	5	270	16.2	171
Wrightsville	NS							

NS, no sample.

The continued demonstration of the ability of the network to detect low levels of radioactivity ensures that higher levels which could affect public health will not go unnoticed.

REFERENCES

(*1*) PORTER, C. R., R. J. AUGUSTINE, J. M. MATUSEK, Jr., and M. W. CARTER. Procedures for determination of stable elements and radionuclides in environmental samples, PHS Publication No. 999–RH 10. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (January 1965).

Results of Radiological Sampling from the Community Water Supply Study

Office of Radiation Programs and
Office of Water Programs Operations
Environmental Protection Agency

A study of community water supplies in eight geographically distributed Standard Metropolitan Statistical Areas[1] (SMSA), and the State of Vermont, (figure 1) was conducted during 1969 by the Bureau of Water Hygiene, PHS (now the Office of Water Programs Operations of EPA). The purpose of the Community Water Supply Study was to determine whether (a) the water in these selected areas met the U.S. Public Health Service Drinking Water Standards (*2*), (b) the water supply systems had facility deficiencies that might indicate or lead to potentially unsafe drinking water, and (c) the bacteriological surveillance programs met the established criteria for collection of the required number of bacteriological samples and for passing the bacteriological quality standard. This study included 969 water supply systems serving about 18.2 million people. The Office of Radiation Programs assisted in this study by performing the analyses for the radioactivity and evaluating the results for comparison with the PHS Drinking Water Standards.

[1] Standard Metropolitan Statistical Area—an area as defined by the Bureau of the Budget that contains at least one city of at least 50,000 inhabitants, or two cities with a combined population of at least 50,000. The area also includes the county of the central city, and adjacent counties that are found to be metropolitan in character and economically and socially integrated with the county of the central city (*1*).

Study areas

The State of Vermont is not a SMSA, but was included in the study at the request of the Commissioner of Health, with the concurrence of the Governor of Vermont. A total of 218 water supplies serving 307,200 people was surveyed. Most supplies in Vermont utilize mountain brooks and springs feeding directly into the distribution system without treatment.

The New York, New York SMSA covered the

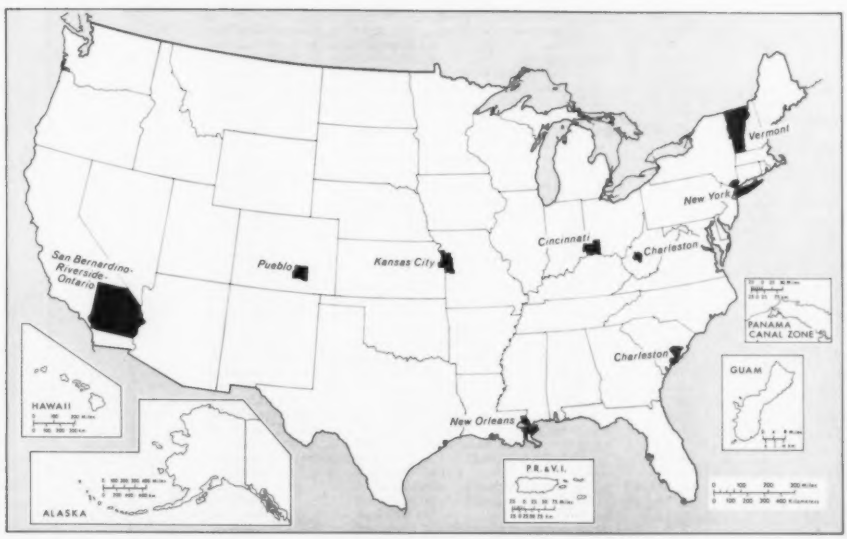

Figure 1. Selected Standard Metropolitan Statistical Areas (SMSA), and the State of Vermont

Table 1. Radioactivity in community water supplies, 1969, State of Vermont

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Vermont:								
Albany	8/1	Other	Finished	Ground	0	0		
Alburg	7/7	Distribution system	Finished	Surface	0	5		
Arlington	7/11	Distribution system	Finished	Ground	0	0		
	8/6	Distribution system	Finished	Other	0	0		
Ascutney	9/2	Distribution system	Partially treated	Combined	0	3		
Bakersfield	7/28	Reservoir	Raw	Ground	0	0		
Barnet	8/5	Distribution system	Finished	Ground	0	0		
Barre	7/9–7/23	Distribution system	Finished	Surface	0	0		
	8/26	Reservoir	Raw	Ground	0	0		
	8/26	Reservoir	Raw	Ground	0	3		
Barton	7/17	Distribution system	Finished	Surface	0	4		
Beebe Plain	7/30	Distribution system	Raw	Ground	0	4		
Beecher Falls	7/30	Well	Raw	Ground	0	0		
Bellow Falls	7/15	Distribution system	Finished	Surface	0	3		
	7/29	Distribution system	Raw	Ground	0	4		
Bennington	7/14	Distribution system	Finished	Ground	0	0		
	7/15–7/28	Reservoir	Finished	Combined	0	3		
	7/15	Reservoir	Partially treated	Surface	0	3		
Berlin	8/22	Distribution system	Finished	Ground	0	0		
Bethel	8/7	Distribution system	Finished	Ground	0	5		
Bloomfield	9/18	Distribution system	Other	Ground	0	0		
Bolton Valley	7/16	Distribution system	Raw	Ground	0	5		
	7/16	Reservoir	Raw	Surface	0	4		
Bradford	7/18	Distribution system	Partially treated	Surface	0	0		
Brandon	7/11	Reservoir	Raw	Surface	0	0		
	7/11	Well	Finished	Combined	0	3		
Brattleboro	7/14–7/28	Distribution system	Finished	Surface	0	4		
Bridgewater	8/25	Distribution system	Finished	Ground	0	5		
	8/25	Distribution system	Finished	Ground	0	3		
Bristol	7/11	Distribution system	Finished	Surface	0	3		
Burlington	7/8–7/22	Treatment plant	Finished	Surface	0	4		
Cabot	8/18	Distribution system	Raw	Ground	0	5		
Cady Falls	8/22	Distribution system	Other	Ground	0	0		
Cambridge	7/23	Distribution system	Finished	Ground	0	0		
Canaan	7/23	Distribution system	Raw	Ground	0	0		
	7/23	Well	Raw	Ground	0	7		
Castleton	7/28	Distribution system	Finished	Ground	0	0		
Cavendish	8/7	Well	Raw	Ground	5	6	0.0	
Center Rutland	7/31	Distribution system	Finished	Ground	0	0		
	7/31	Distribution system	Finished	Ground	0	0		
Chelsea	8/20	Well	Raw	Ground	0	7		
	8/20	Well	Raw	Ground	0	4		
Chester Depot	7/16	Well	Raw	Ground	0	5		
	7/15	Treatment plant	Raw	Surface	0	3		
Colchester	7/31	Treatment plant	Finished	Surface	0	3		
	8/4	Distribution system	Finished	Ground	7	4	.2	
	8/1	Treatment plant	Finished	Surface	0	7		
Concord	7/30	Distribution system	Raw	Ground	0	0		
Coventry	8/1	Distribution system	Finished	Surface	0	3		
Craftsbury	7/31	Other	Raw	Ground	0	0		
	7/31	Reservoir	Raw	Ground	0	10		
Cuttingsville	7/9	Distribution system	Finished	Ground	0	0		
Danby	7/29	Distribution system	Other	Ground	0	0		
Danville	7/11	Distribution system	Finished	Combined	0	0		
Derby Center	7/16	Other	Raw	Ground	0	5		
	7/16	Treatment plant	Finished	Surface	0	7		
Derby Line	7/17	Treatment plant	Finished	Surface	0	6		
Dorset	7/31	Distribution system	Finished	Ground	0	0		
Duxbury	8/26	Distribution system	Finished	Ground	0	0		
	8/26	Distribution system	Finished	Ground	0	0		
East Barnet	8/4	Distribution system	Finished	Other	0	0		
East Barre	10/29	Distribution system	Finished	Ground	4	6	0	
	8/19	Well	Raw	Ground	0	0		
East Berkshire	8/21	Reservoir	Raw	Ground	0	0		
East Braintree	7/17	Distribution system	Raw	Surface	0	0		
East Burke	8/20	Reservoir	Raw	Ground	0	3		
East Calais	8/29	Distribution system	Finished	Ground	0	0		
East Dorset	7/31	Distribution system	Finished	Ground	0	0		
East Fairfield	8/21	Well	Raw	Ground	0	3		
East Haven	7/31	Distribution system	Finished	Ground	0	4		
	7/31	Distribution system	Finished	Ground	0	5		
East Highgate	8/25	Distribution system	Finished	Ground	0	0		
East Middlebury	8/20	Other	Raw	Ground	0	0		
	8/20	Well	Raw	Ground	0	3		
	8/20	Well	Raw	Ground	0	0		
East Montpelier	8/18	Other	Raw	Ground	0	0		
East Ryegate	8/5	Reservoir	Raw	Ground	0	6		
Enosburg Falls	7/24	Distribution system	Finished	Ground	0	0		
Essex Center	8/7	Treatment plant	Finished	Surface	0	0		
Essex Junction	8/7	Other	Finished	Surface	0	0		
	8/8–8/21	Treatment plant	Finished	Surface	0	5		
	8/19	Treatment plant	Finished	Surface	0	5		
	7/18	Well	Finished	Ground	3	0		
Fairfax	8/4	Treatment plant	Finished	Surface	0	0		
Fair Haven	7/9	Other	Raw	Surface	0	8		
Fairlee	7/10	Treatment plant	Finished	Surface	0	4		

See footnotes at end of table.

Table 1. Radioactivity in community water supplies, 1969, State of Vermont—continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Vermont—continued								
Florence	8/4	Distribution system	Finished	Surface	0	0		
Franklin	8/4	Distribution system	Finished	Other	0	0		
Gilman	7/28	Other	Finished	Ground	0	0		
	7/28	Other	Finished	Ground	0	0		
Glover	8/4	Other	Raw	Ground	0	3		
Grand Isle	7/22	Distribution system	Finished	Surface	0	6		
Graniteville	8/26	Reservoir	Partially treated	Ground	0	0		
	8/26	Reservoir	Partially treated	Ground	0	3		
Greensboro	7/30	Distribution system	Finished	Combined	0	0		
	7/30	Treatment plant	Finished	Surface	0	4		
Greensboro Bend	7/30	Distribution system	Finished	Ground	0	0		
Guildhall	8/1	Distribution system	Finished	Surface	0	0		
Hardwick	7/16	Distribution system	Finished	Ground	0	0		
Hinesburg	8/7	Distribution system	Finished	Ground	0	0		
Huntington	7/14	Distribution system	Raw	Ground	0	0		
Huntington Center	7/14	Other	Raw	Surface	0	4		
Hyde Park	7/30	Distribution system	Raw	Ground	0	0		
Irasburg	7/31	Other	Raw	Ground	4	4	0.6	
Island Pond	7/17	Distribution system	Finished	Surface	0	3		
	7/17	Distribution system	Finished	Surface	0	3		
Jeffersonville	7/22	Distribution system	Finished	Ground	0	0		
	8/26	Distribution system	Finished	Surface	0	3		
Jericho	8/19	Treatment plant	Finished	Ground	0	0		
Jericho-Underhill	8/28	Other	Raw	Ground	0	4		
Johnson	7/15	Reservoir	Raw	Surface	0	5		
	7/15	Other	Raw	Ground	0	0		
Jonesville	8/18	Other	Raw	Ground	0	0		
Lake Elmore	8/21	Reservoir	Raw	Ground	0	0		
Ludlow	7/15	Treatment plant	Finished	Surface	0	0		
Lunenburg	7/28	Distribution system	Finished	Ground	0	0		
Lyndonville	7/11	Distribution system	Finished	Combined	0	6		
	8/6	Distribution system	Finished	Surface	0	6		
Mallets Bay	7/8	Distribution system	Finished	Ground	0	0		
Manchester Center	7/15	Distribution system	Finished	Surface	0	0		
	7/15	Distribution system	Finished	Combined	0	0		
Manchester	8/28	Distribution system	Other	Ground	0	4		
Marshfield	8/19	Distribution system	Finished	Ground	0	0		
	8/19	Distribution system	Finished	Ground	0	3		
Mechanicsville	8/7	Distribution system	Finished	Ground	0	0		
Mendon	8/1	Distribution system	Finished	Ground	0	0		
	9/17	Distribution system	Other	Ground	0	3		
	8/1	Distribution system	Other	Ground	0	0		
Middlebury	1/28/70	Distribution system	Raw	Combined	0	3		
	7/10	Well	Raw	Ground	0	0		
	7/10	Treatment plant	Raw	Ground	0	0		
Middlesex	8/26	Distribution system	Finished	Ground	0	0		
	8/26	Other	Other	Ground	0	0		
	8/26	Distribution system	Finished	Ground	0	0		
Milton	8/1	Distribution system	Finished	Surface	0	4		
	8/28	Distribution system	Finished	Ground	4	0	1.0	
	8/27	Distribution system	Raw	Ground	20	6	.8	
	8/28	Distribution system	Raw	Ground	4	3	0	
Montgomery	8/26	Distribution system	Other	Ground	0	0		
	8/26	Distribution system	Other	Combined	0	0		
	7/8	Distribution system	Finished	Surface	0	0		
Montpelier	7/16	Distribution system	Partially treated	Surface	0	0		
	8/21	Distribution system	Finished	Ground	0	0		
Morristown Corners	8/22	Other	Other	Ground	0	0		
Morrisville	7/29	Well	Raw	Ground	0	0		
Newbury	7/10	Treatment plant	Raw	Surface	0	0		
Newport	9/18	Other	Partially treated	Surface	0	4		
	9/18	Well	Raw	Ground	0	0		
Newport Center	7/29	Distribution system	Finished	Ground	0	0		
North Bennington	8/5	Treatment plant	Finished	Combined	0	3		
Northfield	7/17	Well	Finished	Ground	0	0		
North Hartland	7/22	Well	Raw	Ground	0	3		
North Hyde Park	8/22	Other	Raw	Ground	0	0		
North Montpelier	8/18	Distribution system	Raw	Ground	0	0		
North Pownal	7/17	Distribution system	Finished	Surface	0	0		
North Thetford	8/21	Distribution system	Finished	Ground	0	0		
	8/21	Other	Finished	Ground	0	4		
North Troy	7/15	Treatment plant	Finished	Surface	0	3		
North Westminster	7/22	Distribution system	Raw	Ground	0	0		
	7/22	Distribution system	Raw	Ground	0	3		
Norwich	7/15	Treatment plant	Finished	Surface	0	0		
Orleans	7/8	Treatment plant	Finished	Surface	0	3		
Passumpsic	8/5	Distribution system	Finished	Ground	0	0		
	8/5	Distribution system	Finished	Ground	0	8		
Peacham	8/5	Distribution system	Finished	Ground	0	0		
Pittsfield	9/17	Distribution system	Other	Ground	0	0		
Pittsford	7/30	Distribution system	Other	Ground	0	0		
Plainfield	8/19	Reservoir	Raw	Ground	0	6		
Poultney	7/9	Other	Raw	Combined	0	4		
	7/9	Well	Raw	Ground	0	0		
Pownal	7/15	Distribution system	Finished	Surface	0	0		
	8/20	Distribution system	Finished	Ground	0	0		

See footnotes at end of table.

Table 1. Radioactivity in community water supplies, 1969, State of Vermont—continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Vermont—continued								
Proctor	7/11	Well	Raw	Ground	0	0		
	7/11–7/24	Treatment plant	Finished	Surface	0	0		
Proctorsville	8/7	Well	Raw	Ground	0	3		
Putnamville	8/21	Distribution system	Finished	Ground	0	0		
Putney	7/29	Distribution system	Finished	Ground	0	0		
Quechee	7/14	Treatment plant	Finished	Ground	0	0		
Randolph	7/11	Other	Raw	Combined	0	0		
	7/14	Other	Raw	Combined	0	3		
Randolph Center	8/20	Distribution system	Finished	Ground	0	0		
	8/20	Well	Raw	Ground	0	0		
Readsboro	8/5	Distribution system	Raw	Surface	0	4		
Richford	7/8	Distribution system	Finished	Surface	0	4		
Richmond	7/24	Treatment plant	Raw	Ground	0	0		
Rochester	7/22	Distribution system	Raw	Ground	0	0		
Rutland	7/10–7/23	Treatment plant	Finished	Surface	0	0		
	8/27	Distribution system	Finished	Ground	0	0		
St. Albans	7/17–7/31	Treatment plant	Finished	Surface	0	4		
	7/17–7/31	Treatment plant	Finished	Surface	0	6		
St. George	8/28	Well	Other	Ground	10	5	0.4	
St. Johnsbury	7/10	Treatment plant	Finished	Surface	0	4		
St. Johnsbury Center	8/6	Distribution system	Finished	Ground	0	4		
Saxtons River	7/29	Distribution system	Raw	Ground	0	0		
	7/29	Distribution system	Raw	Ground	0	6		
Sharon	8/25	Well	Finished	Ground	0	0		
Shelburne	7/18	Distribution system	Finished	Combined	0	3		
	8/27	Other	Raw	Surface	0	5		
Sheldon	7/24	Distribution system	Finished	Ground	3	4		
Sheldon Springs	8/21	Other	Raw	Surface	0	6		
	8/21	Well	Raw	Ground	0	3		
	8/21	Treatment plant	Finished	Surface	0	4		
South Barre	8/19	Distribution system	Finished	Ground	6	7	.5	
South Burlington	8/20	Distribution system	Finished	Ground	0	0		
South Hero	7/8	Other	Finished	Surface	0	6		
	7/8	Other	Finished	Surface	0	6		
	7/8	Other	Finished	Surface	0	5		
South Royalton	8/25	Reservoir	Raw	Combined	0	5		
	8/25	Reservoir	Raw	Ground	0	0		
	8/25	Well	Finished	Ground	0	6		
	7/22	Distribution system	Raw	Combined	0	7		
South Ryegate	8/5	Other	Raw	Ground	0	0		
South Troy	7/15	Reservoir	Finished	Surface	0	0		
South Wallingford	8/4	Distribution system	Finished	Ground	0	0		
Springfield	7/16	Well	Raw	Ground	0	0		
	7/13	Well	Finished	Ground	0	6		
	7/14	Treatment plant	Partially treated	Surface	0	0		
Starksboro	8/18	Other	Finished	Ground	0	0		
Stowe	7/25	Distribution system	Finished	Other	0	0		
	7/25	Distribution system	Finished	Combined	0	0		
Stratton Mountain	8/4	Other	Raw	Surface	0	4		
Sutton	8/6	Other	Raw	Ground	0	0		
Swanton	7/8	Reservoir	Raw	Surface	0	8		
Thetford	8/21	Other	Finished	Ground	0	4		
Tri-Town Water District	7/18–8/1	Treatment plant	Finished	Surface	0	6		
Vergennes	7/8	Distribution system	Finished	Surface	0	0		
Wallingford	7/9	Distribution system	Finished	Combined	0	0		
Warren	8/29	Distribution system	Finished	Ground	0	0		
Washington	8/27	Distribution system	Finished	Ground	0	9		
Waterbury	8/28	Distribution system	Finished	Ground	7	6	1.8	
	7/10	Well	Raw	Ground	0	7		
	7/10–7/23	Treatment plant	Partially treated	Surface	0	0		
Waterbury Center	8/18	Distribution system	Finished	Ground	0	0		
	8/18	Distribution system	Finished	Ground	0	3		
Waterville	8/27	Other	Raw	Ground	0	0		
Websterville	8/19	Reservoir	Raw	Surface	0	3		
	8/26	Distribution system	Raw	Ground	0	3		
Wells River	8/25	Well	Raw	Ground	0	5		
West Burke	8/5	Other	Raw	Surface	0	0		
	8/5	Other	Raw	Ground	0	0		
Westfield	7/28	Distribution system	Raw	Other	0	3		
Westminster	7/29	Distribution system	Raw	Ground	0	0		
West Rutland	8/27	Distribution system	Finished	Ground	0	0		
	7/17	Distribution system	Raw	Ground	0	0		
Wheelock	8/6	Distribution system	Raw	Ground	0	3		
White River Junction	7/14	Treatment plant	Finished	Combined	0	0		
Williamstown	8/25	Well	Partially treated	Ground	0	0		
	8/28	Reservoir	Raw	Ground	0	3		
Williston	8/29	Well	Other	Ground	3	3		
	8/27	Distribution system	Finished	Ground	17	10	1.7	
	8/28	Distribution system	Other	Ground	11	7	2.7	
	9/3	Reservoir	Partially treated	Ground	0	7		
	9/3	Reservoir	Partially treated	Ground	0	0		
	8/28	Well	Raw	Ground	9	3	0	
	8/28	Well	Raw	Ground	10	4	1.0	

See footnotes at end of table.

Table 7. Radioactivity in community water supplies, 1969, State of Vermont—continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Vermont—continued								
Wilmington	7/17	Distribution system	Finished	Ground	0	0		
Windsor	8/7	Well	Raw	Ground	0	0		
Winooski	8/4	Distribution system	Finished	Ground	3	5		
Woodstock	7/12–7/26	Distribution system	Finished	Surface	0	0		
Worcester	8/19	Well	Finished	Ground	0	0		

[a] The locations shown are the mailing addresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

four counties around New York City and the city itself. The four counties were: Rockland, Westchester, Nassau, and Suffolk. New York City is actually composed of five counties: Bronx, Queens, Kings (Brooklyn), Richmond (Staten Island), and New York (Manhattan). A total of 221 water supplies serving 12,356,300 people was studied. The New York, New York SMSA was selected to represent those water supplies utilizing surface water, providing disinfection only for treatment, and those utilizing ground waters from high population-density areas. It also represents the highly urbanized (megapolis) areas of the United States.

The Charleston, West Virginia SMSA included all of Kanawha County. The study included 30 public water supplies serving about 229,300 people, or about 91 percent of the SMSA population. This area was selected to represent those supplies using surface waters that receive the wastes from a highly industrialized area. The small coal mine town water samples represent supplies in economically depressed areas of the northern Appalachian region.

The Charleston, South Carolina SMSA consisted of Berkeley and Charleston Counties, and included 22 water supplies serving about 251,100 of the 296,000 people in the SMSA. This area represents the Atlantic and Gulf coast areas using both surface and ground water.

The Cincinnati, Ohio-Kentucky-Indiana SMSA included Clermont, Hamilton, and Warren Counties in Ohio, Boone, Campbell, and Kenton Counties in Kentucky, and Dearborn County in Indiana. The study covered 66 water supplies serving 1,366,000 of the 1,409,000 people in the SMSA. This area was selected to represent those portions of mid-America using surface water receiving a considerable amount of industrial discharge in addition to municipal wastes and agriculture runoff.

The Kansas City, Missouri-Kansas SMSA included Cass, Clay, Jackson, and Platte Counties in Missouri and Johnson and Wyandotte Counties in Kansas. A total of 88 water supplies serving 1,383,500 people was surveyed. This SMSA was selected to represent surface waters with a large agriculture runoff to industrial waste ratio.

The New Orleans, Louisiana SMSA consisted of Jefferson, Orleans, St. Bernard, and St. Tammany Parishes and included 26 water supplies serving 1,085,400 people. The SMSA was selected to represent the supplies receiving surface water drained from large and varied river basins, plus some deep artesian wells.

The Pueblo, Colorado SMSA included Pueblo County and 20 water supply systems serving 111,500 people were surveyed. This area has water supplies of the high plains region of the country and also has a mixture of ground water and surface water sources.

The San Bernardino-Riverside-Ontario, California SMSA included Riverside and San Bernardino Counties. A total of 278 water supply systems serving 1,113,400 people was surveyed in this study. This area represents the semiarid regions of the west and southwest as well as an area served primarily by ground water.

A summary of the national findings in this study and the reports on each SMSA studied and the State of Vermont, may be found in references *3* through *12*.

Table 2. Radioactivity in community water supplies, 1969, New York, New York SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Connecticut:								
Greenwich [c]	6/4–6/19	Treatment plant	Finished	Surface	0	4		
New York:								
Amagansett	8/27	Well	Raw	Ground	0	0		
Amityville	8/5	Treatment plant	Finished	Ground	0	3		
	8/5	Treatment plant	Finished	Ground	0	0		
Armonk	5/28	Well	Finished	Ground	0	3		
Babylon	8/5	Treatment plant	Finished	Ground	0	0		
	8/5	Treatment plant	Finished	Ground	0	0		
	8/5	Treatment plant	Finished	Ground	0	0		
	8/5	Treatment plant	Finished	Ground	0	0		
Bayshore	8/6	Treatment plant	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
	8/5	Treatment plant	Finished	Ground	0	4		
Bayville	7/16	Well	Raw	Ground	0	0		
	7/16	Well	Raw	Ground	0	0		
Bedford	5/21	Well	Raw	Ground	0	5		
Bedford Hills	5/28	Distribution system	Finished	Ground	0	4		
	5/26	Distribution system	Finished	Ground	0	0		
Bethpage	7/14–7/28	Treatment plant	Finished	Ground	0	4		
Blauvelt	5/2	Well	Finished	Ground	0	0		
Blue Point	8/18	Well	Raw	Ground	0	0		
Brentwood	8/4	Well	Raw	Ground	0	0		
	8/4	Well	Raw	Ground	0	0		
Braircliff	5/19	Other	Finished	Ground	0	4		
Bridgehampton	8/27	Well	Raw	Ground	0	4		
Bronxville	5/26	Other	Finished	Ground	0	5		
Calverton	8/22	Well	Finished	Ground	0	5		
	8/21	Well	Raw	Ground	0	5		
Camp Addisone Boyce (Tomkins Cove)	7/10	Well	Raw	Ground	0	6		
Camp Bullowa (Stoney Point)	7/9	Well	Raw	Ground	0	3		
	7/9	Well	Raw	Ground	0	0		
Camp Jawonia (New City)	5/8	Distribution system	Finished	Ground	0	0		
Camp Low Acres (Spring Valley)	7/10	Well	Raw	Ground	0	0		
Camp Ramaquois (Pomona)	7/10	Well	Raw	Ground	0	0		
Camp Smith (Peekskill)	7/9	Treatment plant	Finished	Ground	0	0		
Camp Williams (Suffern)	7/10	Well	Raw	Ground	0	0		
Carle Place	7/15	Well	Raw	Ground	0	4		
	7/15	Well	Raw	Ground	0	0		
Central Islip	8/18	Treatment plant	Finished	Ground	0	0		
Chappaqua	5/23–6/6	Treatment plant	Finished	Surface	0	4		
Cherry Grove	8/26	Well	Other	Ground	0	0		
Coram	8/5	Well	Raw	Ground	0	0		
Cove Neck	8/1	Well	Raw	Ground	0	0		
Croton	5/27	Well	Finished	Ground	0	3		
Davis Park	8/27	Well	Other	Ground	0	0		
Dunewood	8/25	Treatment plant	Finished	Ground	0	3		
East Hampton	8/7	Treatment plant	Finished	Ground	0	0		
East Meadow	7/14	Treatment plant	Finished	Ground	0	3		
East Patchogue	8/20	Well	Raw	Ground	0	0		
East Quogue	8/21	Well	Raw	Ground	0	0		
Fair Harbor	8/21	Well	Other	Ground	0	4		
Farmingdale	8/4	Distribution system	Finished	Ground	0	0		
	7/18	Well	Finished	Ground	0	0		
	8/4	Distribution system	Finished	Ground	0	3		
Fair Island Pines	8/27	Well	Raw	Ground	0	0		
Fishers Island	8/29	Treatment plant	Finished	Surface	0	6		
Franklin Square	7/28	Distribution system	Finished	Ground	0	0		
Freeport	7/14	Treatment plant	Finished	Ground	0	0		
Garden City Park	7/29	Well	Raw	Ground	0	0		
	7/29	Well	Raw	Ground	0	0		
Garden City	7/14	Well	Raw	Ground	0	3		
	7/14	Well	Raw	Ground	0	0		
	7/14	Well	Raw	Ground	0	0		
Garnerville	5/2	Distribution system	Finished	Ground	0	0		
	5/5	Well	Finished	Ground	0	0		
	5/8	Well	Raw	Ground	0	0		
Glen Cove	7/17	Well	Finished	Ground	0	0		
	7/17	Reservoir	Finished	Ground	0	0		
Goldens Bridge	5/28	Well	Finished	Ground	0	3		
	7/8	Well	Raw	Ground	3	6		
	7/8	Well	Raw	Ground	0	3		
Great Neck	7/16	Well	Finished	Ground	0	0		
Greenlawn	8/19	Well	Raw	Ground	0	0		
Greenport	8/25	Well	Raw	Ground	0	4		
Hampton Bays	8/21	Distribution system	Finished	Ground	0	0		
Harrison	7/8	Well	Raw	Ground	0	3		
Haverstraw	5/15	Distribution system	Other	Ground	0	3		
Hempstead	7/29	Treatment plant	Finished	Ground	0	0		
Hicksville	7/15	Distribution system	Finished	Ground	3	5		
Hillburn	5/5	Distribution system	Finished	Surface	0	0		

See footnotes at end of table.

Table 2. Radioactivity in community water supplies, 1969, New York, New York SMSA—continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
New York—continued								
Huntington	8/6	Treatment plant	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
	8/19	Well	Raw	Ground	0	0		
	8/19	Well	Finished	Ground	0	0		
	8/18	Distribution system	Raw	Ground	0	0		
Huntington Station	8/19	Distribution system	Finished	Ground	0	0		
Irvington	5/20–6/2	Other	Finished	Surface	0	5		
Jamaica	9/11	Well	Finished	Ground	3	0		
	9/11	Well	Finished	Ground	0	0		
	9/10	Treatment plant	Partially treated	Ground	0	0		
	9/10	Treatment plant	Partially treated	Ground	0	3		
Jericho	7/14	Well	Raw	Ground	0	0		
	7/14	Well	Raw	Ground	0	3		
	7/14	Well	Raw	Ground	0	0		
Katonah	5/21	Well	Finished	Ground	0	6		
	7/8	Well	Raw	Ground	6	11		
Kings Park	8/20	Distribution system	Finished	Ground	0	0		
Kismet	8/21	Well	Other	Ground	0	0		
Lake Grove	9/9	Distribution system	Other	Ground	0	0		
	9/9	Distribution system	Other	Ground	0	3		
	8/5	Well	Finished	Ground	0	0		
Lake Ronkonkoma	8/6	Well	Raw	Ground	0	0		
Larchmont	5/22–6/5	Treatment plant	Finished	Surface	0	9		
Levittown	7/15	Treatment plant	Finished	Ground	0	0		
Locust Valley	7/17	Well	Raw	Ground	0	0		
Long Beach	7/17	Well	Raw	Ground	0	0		
Lynbrook	7/29	Treatment plant	Finished	Ground	0	3		
	7/29–8/12	Treatment plant	Finished	Ground	0	0		
Mamaroneck	5/29–6/13	Treatment plant	Finished	Surface	0	11		
Manhasset	7/16	Distribution system	Finished	Ground	0	0		
Massapequa	7/29	Distribution system	Finished	Ground	0	0		
	7/29	Distribution system	Finished	Ground	0	0		
Mattituck	8/20	Distribution system	Finished	Ground	0	0		
Melville	8/19	Distribution system	Finished	Ground	0	0		
Merrick	8/1	Other	Finished	Ground	0	0		
	8/1	Distribution system	Finished	Ground	0	0		
	7/30	Reservoir	Finished	Ground	0	0		
	7/30	Reservoir	Finished	Ground	0	0		
	7/30	Well	Raw	Ground	0	10		
	7/30	Well	Raw	Ground	0	0		
Miller Place	8/5	Well	Raw	Ground	0	0		
	8/6	Well	Finished	Ground	0	0		
Mill Neck	7/17	Well	Raw	Ground	0	0		
Mineola Village	7/31	Well	Raw	Ground	0	0		
	7/31	Well	Raw	Ground	0	0		
Mineola	7/30	Well	Raw	Ground	0	0		
	7/30	Well	Raw	Ground	0	0		
Montauk	8/28	Well	Raw	Ground	0	0		
	8/28	Distribution system	Finished	Ground	0	0		
Mt. Ivy	5/7	Well	Raw	Ground	0	0		
	5/8	Distribution system	Finished	Ground	0	0		
	5/9	Distribution system	Finished	Ground	3	0		
	5/9	Well	Finished	Ground	0	0		
	5/7	Distribution system	Finished	Ground	0	0		
Mt. Kisco	5/23	Treatment plant	Finished	Surface	0	5		
Mt. Sinai	8/5	Well	Raw	Ground	0	0		
Mountain Lakes Camp (North Salem)	9/26	Well	Raw	Ground	0	0		
Nanuet	5/5	Well	Other	Ground	0	0		
New City	5/2	Distribution system	Finished	Ground	0	0		
New Rochelle	5/28	Treatment plant	Finished	Surface	0	5		
New York City (Ashokan Reservoir)	6/23–7/7	Reservoir	Partially treated	Surface	0	0		
New York City (Pleasantville)	6/26–7/9	Reservoir	Partially treated	Surface	0	0		
New York City (Croton Watershed)	7/15–7/29	Reservoir	Finished	Surface	0	4		
	7/16–7/30	Reservoir	Finished	Surface	0	6		
New York City (Croton Lake)	7/15–7/28	Reservoir	Partially treated	Surface	0	0		
New York City (Grahamsville)	6/23–7/7	Reservoir	Partially treated	Surface	0	0		
New York City (North Castle)	6/26–7/9	Reservoir	Partially treated	Surface	0	3		
New York City (East View)	6/26–7/9	Reservoir	Finished	Surface	0	0		
New York City (Woodhaven)	9/11	Distribution system	Finished	Ground	0	14		0
	9/11	Well	Finished	Ground	0	5		
	9/11	Well	Finished	Ground	0	0		
Northport	8/6	Treatment plant	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
North Salem	5/27	Distribution system	Finished	Ground	0	3		
	7/9	Well	Raw	Ground	0	4		
	5/28	Distribution system	Finished	Ground	0	6		
North White Plains	5/26	Treatment plant	Finished	Ground	0	3		
Nyack	5/6–5/19	Treatment plant	Finished	Surface	0	5		
Ocean Bay Park	8/26	Treatment plant	Finished	Ground	0	0		
Ocean Beach	8/27	Well	Other	Ground	0	4		
	8/28	Well	Other	Ground	0	4		

See footnotes at end of table.

Table 2. Radioactivity in community water supplies, 1969, New York, New York SMSA—continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
New York—continued								
Old Westbury	7/30	Well	Raw	Ground	0	0		
	7/30	Well	Raw	Ground	0	0		
Orangeburg	5/9	Reservoir	Other	Ground	0	3		
	5/7	Well	Other	Ground	0	0		
Oyster Bay	7/18	Well	Raw	Ground	0	0		
	7/18	Treatment plant	Finished	Ground	0	0		
Patchogue	8/6	Treatment plant	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
Peconic	8/21	Distribution system	Raw	Ground	0	0		
Peekskill	5/23–6/5	Treatment plant	Finished	Surface	0	0		
Plainview	7/30	Distribution system	Finished	Ground	0	0		
	7/30	Distribution system	Finished	Ground	0	0		
Plandome	7/16	Well	Other	Ground	0	0		
Pocantico Hills	5/20–6/2	Treatment plant	Finished	Surface	0	5		
	5/28	Distribution system	Raw	Ground	0	7		
Point Lookout	7/16	Treatment plant	Finished	Ground	0	0		
Point O'Woods	8/26	Well	Other	Ground	0	0		
Pomona	5/6	Reservoir	Finished	Ground	0	0		
Port Jefferson	8/7	Distribution system	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
	9/8	Distribution system	Finished	Ground	0	23		0
Port Washington	7/16	Reservoir	Finished	Ground	0	0		
Riverhead	8/21	Well	Finished	Ground	0	3		
	8/20	Well	Raw	Ground	0	0		
Rockville Center	7/17	Well	Raw	Ground	0	0		
	7/17	Well	Raw	Ground	0	0		
Rocky Point	9/10	Distribution system	Finished	Ground	0	0		
	8/5	Well	Raw	Ground	0	0		
	8/8	Well	Raw	Ground	0	0		
	8/5	Well	Raw	Ground	0	0		
Ronkonkoma	9/10	Distribution system	Other	Ground	0	0		
Roslyn	7/18	Well	Raw	Ground	0	0		
	7/18	Well	Raw	Ground	0	0		
Roslyn Heights	8/1	Distribution system	Other	Ground	0	3		
	8/5	Well	Finished	Ground	0	0		
Sagamore Hill historic site	8/1	Well	Raw	Ground	0	0		
	8/1	Well	Partially treated	Ground	0	0		
Sag Harbor	8/7	Treatment plant	Finished	Ground	0	0		
Saltaire	8/21	Well	Other	Ground	0	4		
Sands Point	7/16	Other	Finished	Ground	0	0		
Scarsdale	5/22	Treatment plant	Finished	Surface	0	5		
Sea Cliff	7/15	Well	Raw	Ground	0	3		
	7/15	Well	Raw	Ground	0	0		
Seaview	8/25	Treatment plant	Finished	Ground	0	4		
Seldon	8/20	Well	Raw	Ground	0	0		
Shelter Island	8/26	Distribution system	Finished	Ground	0	7		
	8/26	Well	Raw	Ground	0	0		
Shenrock	5/26	Treatment plant	Finished	Combined	0	3		
Shirley	9/8	Distribution system	Finished	Ground	0	0		
Shrub Oak	6/3–6/17	Other	Other	Ground	0	3		
Sloatsburg	4/30	Distribution system	Finished	Surface	0	4		
	5/7	Distribution system	Finished	Surface	0	0		
Smithtown	8/6	Treatment plant	Finished	Ground	0	0		
	8/6	Treatment plant	Finished	Ground	0	0		
Southampton	8/7	Treatment plant	Finished	Ground	0	0		
	8/21	Well	Finished	Ground	0	0		
South Farmingdale	7/16	Well	Raw	Ground	0	3		
	7/16	Well	Raw	Ground	0	0		
South Salem	7/9	Reservoir	Raw	Ground	8	8		
Sparkill	5/6	Distribution system	Finished	Ground	0	0		
Spring Valley	5/15	Well	Other	Ground	0	0		
	5/2	Distribution system	Finished	Combined	0	0		
	5/2–5/15	Treatment plant	Finished	Surface	0	4		
Stony Brook	8/6	Well	Raw	Ground	0	0		
Stony Point	5/8	Distribution system	Finished	Ground	0	0		
Suffern	5/5	Distribution system	Finished	Ground	0	4		
	5/6	Distribution system	Finished	Ground	0	0		
Tarrytown	5/21–6/3	Treatment plant	Finished	Surface	0	6		
Thiells	5/8–5/21	Treatment plant	Finished	Surface	0	3		
Thornwood	5/21	Treatment plant	Raw	Ground	0	0		
Truesdale	7/9	Reservoir	Raw	Ground	0	4		
Uniondale	7/15	Treatment plant	Finished	Ground	0	0		
Valley Cottage	5/8	Distribution system	Finished	Ground	4	3	0	
	7/10	Distribution system	Raw	Ground	0	0		
	5/9	Distribution system	Finished	Ground	0	0		
	5/7	Well	Finished	Ground	3	0		
Wading River	8/7	Well	Raw	Ground	0	0		
	8/6	Well	Raw	Ground	0	0		
	8/7	Well	Raw	Ground	0	0		
	8/7	Well	Raw	Ground	0	3		
West Brentwood	8/19	Treatment plant	Finished	Ground	0	0		
Westbury	7/14	Treatment plant	Finished	Ground	3	3		
	7/28	Reservoir	Raw	Ground	0	0		
	7/28	Well	Raw	Ground	0	0		
West Gilgo Beach	8/22	Treatment plant	Finished	Ground	0	7		
Westhampton	8/7	Treatment plant	Finished	Ground	0	0		

See footnotes at end of table.

Table 2. Radioactivity in community water supplies, 1969, New York, New York SMSA—continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross btta	^{226}Ra	^{90}Sr
New York—continued								
West Haverstraw	5/1	Well	Finished	Ground	0	0		
West Hempstead	7/31	Reservoir	Finished	Ground	0	3		
West Island	8/28	Other	Other	Ground	0	4		
White Plains	5/27	Other	Finished	Surface	0	3		
Williston Park	8/1	Well	Raw	Ground	0	0		
	8/1	Well	Raw	Ground	0	0		
Yonkers	7/9–7/22	Other	Finished	Surface	0	0		

[a] The locations shown are the mailing addresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.
[c] Treatment plant that services a portion of the New York, New York SMSA.

Table 3. Radioactivity in community water supplies, 1969, Charleston, West Virginia SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross btta	^{226}Ra	^{90}Sr
West Virginia:								
Belle	3/20–4/2	Treatment plant	Finished	Surface	0	0		
Burnwell	3/26	Treatment plant	Finished	Ground	0	0		
Carbon	3/24	Distribution system	Finished	Ground	0	0		
Cedar Grove	3/20–4/3	Treatment plant	Finished	Surface	0	0		
Charleston	3/19–4/1	Treatment plant	Finished	Surface	0	0		
Chelyan	3/20–4/3	Treatment plant	Finished	Surface	0	0		
Clendenin	3/18–4/1	Treatment plant	Finished	Surface	0	0		
Corton	3/18	Treatment plant	Finished	Surface	0	0		
Decota	3/26–4/8	Treatment plant	Finished	Ground	0	3		
Handley	3/26–4/8	Treatment plant	Finished	Surface	0	0		
Kayford	3/25	Distribution system	Finished	Surface	0	5		0
Leewood	3/25	Distribution system	Finished	Ground	0	0		
	3/25	Well	Finished	Ground	0	3		
Miami	3/20–4/3	Treatment plant	Finished	Ground	0	3		
Montgomery	3/25–4/6	Treatment plant	Finished	Surface	0	0	0	
Mount Tyler	3/21–4/11	Treatment plant	Finished	Ground	0	3		
Nitro	3/21–4/3	Treatment plant	Finished	Surface	0	4		
Pinch	3/18–3/31	Treatment plant	Finished	Surface	0	0	0	
Pratt	3/24–4/13	Treatment plant	Finished	Surface	0	0		
Rensford	3/17	Distribution system	Raw	Ground	0	6		
Republic	3/24	Distribution system	Finished	Ground	0	0		
Sharon	3/20–4/3	Treatment plant	Finished	Ground	0	7		0
Shrewsbury	3/20–4/3	Treatment plant	Finished	Ground	0	0		
Sissonville	3/17–3/31	Treatment plant	Finished	Surface	0	3		
St. Albans	3/17–3/31	Treatment plant	Finished	Surface	0	0		
Ward	3/26	Well	Raw	Ground	0	3		
Winifrede	3/18	Distribution system	Raw	Ground	0	5		0

[a] The locations shown are the mailing addresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

Results and discussion

At least one water sample from each water system in this study was sent to either the Northeastern Radiological Health Laboratory, Western Environmental Research Laboratory (now the National Environmental Research Center—Las Vegas), or the Eastern Environmental Radiation Laboratory for analysis. The samples were collected by the grab sampling method on the date shown except where a range of dates indicates a composite of samples collected over that period of time.

The Drinking Water Standards (*2*) set limits for radioactivity at 3 pCi/liter for radium-226, 10 pCi/liter for strontium-90, and 1,000 pCi/liter for gross beta in the known absence of strontium-90 and alpha emitters. In this study, gross alpha and beta radioactivity analyses were performed on all samples. A radium-226 analysis was performed if the gross alpha ra-

dioactivity exceeded 3 pCi/liter, and a strontium-90 analysis was performed if the gross beta radioactivity exceeded 10 pCi/liter.

Tables 1 through 9 show the results of the individual measurements made in each SMSA and Vermont, and table 10 is a summary of the data in this study. The locations shown in tables 1–9 are the mailing addresses for the community from which the water supply was sampled. Gamma scans were performed on all samples, but since no detectable activity was found in any sample, these results have been omitted from tables 1–10. Tritium analyses were performed on 144 selected samples from this study and these results have previously been published (*13*).

As indicated in table 10, no sample exceeded 10 pCi/liter for strontium-90, but 7 samples exceeded 3 pCi/liter for radium-226. The maximum radium-226 concentration for an individual sample was 136 pCi/liter for Rye, Colo. This sample was from a well that provides up to 50 percent of the total water supply to 600 residents during the summer months to supplement the surface water supply.

The second highest radium-226 concentration was 76.5 pCi/liter in the Pueblo, Colorado. SMSA. This was taken from the community of Kirkland, Colo. with a population of 50. Assuming that the concentration of radium-226 in all water taken into the body is equal to that found in the drinking water, and assuming an intake of 2.2 liters/day (*14*) for 50 years at that concentration, then the yearly radiation dose to a suitable sample of the exposed population may be estimated. By using the guidelines of NCRP Report No. 39 (*15*) and FRC Report No. 2 (*16*), the mean skeletal dose rate from a permissible burden of 0.1 μCi radium-226 plus 30 percent daughters is 30 rem/a. The Radiation Protection Guide (RPG) for suitable samples of the exposed population is a skeletal concentration of radium-226 corresponding to 0.001 μCi in the adult skeleton. A continuous daily intake of 20 pCi/day of radium-226 for 50 years would correspond to the RPG of 0.001 μCi radium-226 in the adult skeleton, and this would result in a dose of 0.3 rem/a after 50 years. In the case of people consuming drinking water containing 76.5 pCi/liter of radium-226 for 50 years, then

Table 4. Radioactivity in community water supplies, 1969, Charleston, South Carolina SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
South Carolina:								
Charleston	3/3	Well	Raw	Ground	0	0		
	3/6	Distribution system	Finished	Surface	0	13		0
	3/4–3/18	Treatment plant	Finished	Surface	0	0		
Charleston Heights	3/6	Distribution system	Raw	Ground	0	0	0	
Edisto Beach	3/4	Distribution system	Other	Ground	0	27		
	3/4	Distribution system	Other	Ground	0	14		0
	3/4	Well	Other	Ground	0	28		0
Goose Creek	3/6	Well	Raw	Ground	0	11		0
	3/6	Distribution system	Finished	Ground	0	11		0
	3/6	Distribution system	Finished	Ground	0	12		0
	3/5	Distribution system	Finished	Ground	0	11		
Isle of Palms	3/4	Distribution system	Finished	Ground	0	5		
Johns Island	3/5	Well	Other	Ground	0	3	0	
Moncks Corner	3/6	Well	Raw	Ground	0	15		0
	3/4	Reservoir	Finished	Ground	0	14		
Mount Pleasant	3/5	Treatment plant	Finished	Ground	0	40		
	3/5	Distribution system	Finished	Ground	0	0		
Pinopolis	3/7	Distribution system	Raw	Ground	0	5		
St. Stephen	3/3	Well	Raw	Ground	0	5		
Sullivans Island	3/3	Distribution system	Finished	Ground	0	0		

[a] The locations shown are the mailing addresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

Table 5. Radioactivity in community water supplies, 1969, Cincinnati, Ohio-Kentucky-Indiana SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Indiana:								
Aurora	3/6–3/20	Treatment plant	Finished	Ground	0	0		
Dillsboro	3/7–3/20	Distribution system	Finished	Other	0	0		
Lawrenceburg	3/5–3/18	Treatment plant	Finished	Ground	0	0		
	3/6–3/20	Treatment plant	Finished	Ground	0	0		
	3/6–3/19	Distribution system	Finished	Ground	0	0		
Kentucky:								
Burlington	3/3–3/18	Distribution system	Finished	Surface	0	0		
Covington	3/5–3/19	Treatment plant	Finished	Surface	0	0		
Ft. Thomas	3/5–3/18	Other	Finished	Surface	0	0		
Newport	3/4–3/17	Treatment plant	Finished	Surface	0	0		
Silver Grove	3/4	Treatment plant	Finished	Ground	0	0		
Walton	3/4–3/18	Treatment plant	Finished	Surface	0	0		
Winston Park	3/6–3/19	Treatment plant	Finished	Surface	0	0		
Ohio:								
Addyston	2/28	Distribution system	Finished	Ground	0	0		
Amelia	2/27–3/13	Distribution system	Finished	Ground	0	0		
Batavia	3/4–3/17	Treatment plant	Finished	Surface	0	3		
Bethel	3/3–3/17	Treatment plant	Finished	Surface	0	3		
Branch Hill	3/4–3/18	Distribution system	Finished	Ground	0	0		
Cincinnati	3/3–3/16	Treatment plant	Finished	Surface	0	0		
Cleves	2/27–3/12	Treatment plant	Finished	Ground	0	0		
Felicity	2/28–3/14	Well	Raw	Ground	0	0		
Franklin	3/3–3/16	Distribution system	Finished	Ground	0	0		
Glendale	3/3–3/16	Treatment plant	Finished	Ground	0	0		
Harrison	2/27–3/12	Treatment plant	Finished	Ground	0	0		
Indian Hill	2/27–3/12	Treatment plant	Finished	Ground	0	0		
Lebanon	2/27–3/12	Treatment plant	Finished	Ground	0	0		
	2/28–3/17	Treatment plant	Finished	Ground	0	0		
	3/4	Distribution system	Raw	Ground	0	0		
Lockland	2/28–3/13	Treatment plant	Finished	Ground	0	0		
Loveland	3/4	Distribution system	Finished	Ground	0	0		
	3/4–3/17	Treatment plant	Partially treated	Ground	0	0		
Mason	3/6–3/20	Distribution system	Finished	Combined	0	0		
	3/3–3/17	Treatment plant	Finished	Ground	0	0		
Milford	2/28–3/14	Treatment plant	Finished	Ground	0	0		
	2/27–3/13	Treatment plant	Finished	Ground	0	0		
Morrow	3/3–3/18	Distribution system	Finished	Ground	0	0		
New Richmond	3/4–3/8	Treatment plant	Finished	Ground	0	0		
Norwood	2/27–3/13	Distribution system	Finished	Ground	0	0		
Reading	2/28–3/14	Treatment plant	Finished	Ground	0	0		
South Lebanon	3/3	Distribution system	Raw	Ground	3	7		
Springboro	3/4–3/17	Treatment plant	Finished	Ground	0	0		
	3/4–3/17	Treatment plant	Finished	Ground	0	0		
Waynesville	3/3–3/17	Well	Finished	Ground	0	0		
Williamsburg	2/28–3/14	Treatment plant	Finished	Surface	0	0		
Wyoming	2/27–3/12	Treatment plant	Finished	Ground	0	0		

[a] The locations shown are the mailing addresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

the average yearly dose after 50 years would be about 2.5 rem/a from the body burden of 0.0084 μCi of radium-226 in the adult skeleton.

The two intakes of radium-226 in Rye and Kirkland, Colo. fall within the Federal Radiation Council's (*16*) Range III scale of actions. Surveillance should be adequate to define clearly the extent of the exposure and control actions should be designed to reduce the levels to Range II or lower and to provide stability at lower levels.

The State of Colorado has closed the original two wells in Kirkland since the survey. An additional well has been dug and treatment is being provided to reduce the levels of radium-226. Since water from the well in Rye is used only when the surface water supply is low, no treatment has been initiated.

REFERENCES

(*1*) EXECUTIVE OFFICE OF THE PRESIDENT/ BUREAU OF THE BUDGET. Standard metropolitan statistical areas (1967).

(*2*) U.S. PUBLIC HEALTH SERVICE. Drinking water standards, revised 1962, PHS Publication No. 956. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (March 1963).

Table 6. Radioactivity in community water supplies, 1969, Kansas City, Kansas-Missouri SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Kansas:								
Bethel	6/12	Treatment plant	Finished	Ground	0	6		
Bonner Springs	6/12	Treatment plant	Finished	Ground	0	9		
De Soto	6/13	Treatment plant	Finished	Ground	0	4		
	6/2–6/16	Treatment plant	Finished	Surface	0	10		
Edgerton	6/4–6/17	Treatment plant	Finished	Surface	0	11		0
Gardner	6/4–6/18	Treatment plant	Finished	Surface	0	7		
Kansas City	6/11	Well	Raw	Ground	0	0		
	6/3–6/17	Treatment plant	Finished	Surface	0	6		
Olathe	6/11–6/24	Treatment plant	Finished	Ground	3	5		
	6/4–6/18	Treatment plant	Finished	Surface	0	7		
	6/17	Treatment plant	Finished	Surface	0	7		
	6/11	Distribution system	Finished	Ground	0	23		0
Shawnee-Mission	6/2–6/16	Treatment plant	Finished	Combined	0	0		
Spring Hill	6/4–6/17	Treatment plant	Finished	Surface	0	5		
Stillwell	6/4–6/18	Treatment plant	Finished	Surface	0	0		
Missouri:								
Archie	6/6–6/19	Treatment plant	Finished	Surface	0	6		
Belton	6/11	Distribution system	Finished	Other	0	10		
	6/11	Distribution system	Finished	Surface	0	5		
	6/11	Well	Raw	Ground	0	4		
Camden Point	6/16	Treatment plant	Finished	Ground	0	0		
Cleveland	6/5–6/18	Treatment plant	Finished	Surface	0	9		
Creighton	6/10	Well	Raw	Ground	6	12	4.3	0
Dearborn	6/18–7/1	Treatment plant	Finished	Surface	0	0		
Drexel	6/6–6/19	Treatment plant	Finished	Surface	0	11		0
East Lynne	6/9	Well	Finished	Ground	0	0		
Edgerton	6/18	Treatment plant	Finished	Ground	0	0		
Excelsior Springs	6/19	Treatment plant	Finished	Ground	0	0		
Farley	6/18	Treatment plant	Finished	Ground	0	0		
Freeman	6/5–6/18	Treatment plant	Finished	Surface	0	4		
	6/12	Reservoir	Raw	Ground	0	3		
	6/12	Well	Raw	Ground	5	0	.2	
Garden City	6/6–6/19	Treatment plant	Finished	Surface	0	7		
Gladstone	6/19	Treatment plant	Finished	Ground	0	5		
Greenwood	6/5–6/18	Treatment plant	Finished	Surface	0	9		
Harrisonville	6/5–6/19	Treatment plant	Finished	Surface	0	7		
Independence	6/16	Treatment plant	Raw	Ground	3	11		0
	6/12	Treatment plant	Finished	Ground	0	6		
Kansas City	6/12–6/25	Treatment plant	Finished	Surface	0	6		
Kearney	6/13	Distribution system	Finished	Other	0	0		
	6/13	Treatment plant	Finished	Ground	0	3		
Lee's Summit	6/16–6/30	Treatment plant	Finished	Surface	0	7		
Liberty	6/19	Treatment plant	Finished	Ground	0	3		
	6/19	Treatment plant	Finished	Ground	0	0		
Mosby	6/19	Treatment plant	Finished	Ground	0	0		
North Kansas City	6/19	Treatment plant	Raw	Ground	4	7		
Oak Grove	6/16–6/29	Treatment plant	Finished	Surface	0	5		
Parkville	6/17–7/1	Treatment plant	Finished	Ground	0	7		
Peculiar	6/5–6/18	Treatment plant	Finished	Surface	0	6		
Platte City	6/16–7/1	Treatment plant	Finished	Ground	0	5		
	6/16	Treatment plant	Finished	Ground	0	3		
Pleasant Hill	6/6–6/20	Treatment plant	Finished	Surface	0	8		
Raymore	6/5–6/18	Treatment plant	Finished	Surface	0	9		
Smithville	6/13–6/26	Treatment plant	Finished	Surface	0	9		
Tracy	6/18	Treatment plant	Finished	Ground	0	5		
Waldron	6/18	Treatment plant	Finished	Ground	0	5		
Weston	6/17	Treatment plant	Finished	Ground	0	6		

[a] The locations shown are the mailing aldresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

(*3*) McCABE, L. J., J. M. SYMONS, R. D. LEE, and G. G. ROBECK. Survey of community water supply systems. JAWWA 62:670–687 (1970).

(*4*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, State of Vermont (1970).

(*5*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, New York standard metropolitan statistical area (June 1970).

(*6*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, Charleston, West Virginia standard metropolitan statistical area (June 1970).

(*7*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, Charleston, South Carolina standard metropolitan statistical area (1970).

Table 7. Radioactivity in community water supplies, 1969, New Orleans, Louisiana SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Louisiana:								
Abita Springs	6/25	Well	Raw	Ground	0	0		
	6/25	Well	Raw	Ground	0	0		
	6/24	Well	Raw	Ground	0	0		
Chalmette	6/19–7/2	Treatment plant	Finished	Surface	0	6	0	0
Covington	6/23	Reservoir	Finished	Ground	0	0		
	6/23	Well	Finished	Ground	0	0		
	6/24	Well	Finished	Ground	0	0		
	6/24	Well	Finished	Ground	0	0		
	6/24	Well	Finished	Ground	0	0		
	6/23	Well	Finished	Ground	0	0		
	6/24	Well	Finished	Ground	0	0		
	6/23	Well	Raw	Ground	0	0		
Grand Isle	6/18	Reservoir	Finished	Surface	0	5		
Gretna	6/16–6/29	Treatment plant	Finished	Surface	0	5	0	0
Madisonville	6/23	Well	Other	Ground	0	0		
Mandeville	6/23	Well	Finished	Ground	0	0		
	6/25	Well	Finished	Ground	0	0		
	6/24	Well	Finished	Ground	0	0		
	6/24	Well	Finished	Ground	0	0		
New Orleans	6/20–7/3	Treatment plant	Finished	Surface	0	5		
	6/19–7/2	Treatment plant	Finished	Surface	0	5		
	6/23–7/6	Treatment plant	Finished	Surface	0	5		
	6/20	Reservoir	Finished	Ground	0	6	0	0
Pearl River	6/24	Well	Raw	Ground	0	0		
	6/24	Well	Raw	Ground	0	0		
Slidell	6/24	Well	Other	Ground	0	0		
	6/24	Well	Other	Ground	0	0		
Sun	6/25	Distribution system	Finished	Ground	0	2		
Westwego	6/17–6/30	Treatment plant	Finished	Surface	0	6	0	0

[a] The locations shown are the mailing aldresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

Table 8. Radioactivity in community water supplies, 1969, Colorado SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
Colorado:								
Beulah	6/17	Treatment plant	Finished	Surface	0	5		
	6/16	Distribution system	Raw	Surface	0	4		
Blende	6/12	Well	Finished	Ground	0	6		
Boone	6/16	Distribution system	Finished	Ground	5	5	0.4	
Colorado City	6/13	Well	Raw	Ground	13	10	2.1	
Pueblo	6/13–6/26	Treatment plant	Finished	Surface	0	5		
	6/10	Other	Raw	Ground	12	9	.2	
	6/10	Well	Finished	Ground	9	6	0	
	6/11	Well	Raw	Ground	22	55	5.4	0
	6/10	Distribution system	Finished	Ground	164	73	76.5	
	6/10	Well	Raw	Ground	3	5		
	6/11	Well	Raw	Ground	6	10	0	
	6/12	Reservoir	Finished	Ground	10	8	.2	
	6/11	Well	Finished	Ground	5	12	1.7	0
	6/9	Well	Finished	Ground	0	4		
	6/12	Reservoir	Finished	Ground	13	11	.2	0
	6/9	Well	Raw	Ground	28	57	5.4	0
	6/18	Well	Finished	Ground	21	26	4.6	0
	6/12	Well	Finished	Ground	14	42	2.2	0
	6/12	Well	Raw	Ground	7	7	0	
Rye	6/13	Well	Finished	Ground	377	154	136	
	6/13	Treatment plant	Raw	Surface	0	5		

[a] The locations shown are the mailing aldresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

Table 9. Radioactivity in community water supplies, 1969, San Bernardio-Riverside-Ontario, California SMSA

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
California:								
Adelanto	3/26	Well	Finished	Ground	0	63		0
	3/19	Other	Finished	Ground	0	10		
Alta Loma	3/27–4/10	Other	Raw	Surface	4	0	0	
Angelus Oaks	5/22	Distribution system	Finished	Ground	0	5		
Anza	4/16	Distribution system	Finished	Ground	0	3		
Apple Valley	4/9	Distribution system	Raw	Ground	0	0		
	4/16	Well	Other	Ground	14	5	0.2	
	3/26	Well	Raw	Ground	0	3		
	3/26	Well	Raw	Ground	3	0		
	3/26	Well	Raw	Ground	4	0	0	
	4/9	Reservoir	Raw	Ground	9	4	0	
	3/19	Well	Raw	Ground	0	3		
	3/19	Well	Raw	Ground	0	13		0
	3/19	Well	Raw	Ground	0	6		
	3/19	Well	Raw	Ground	4	19	.2	0
	3/24	Well	Raw	Ground	10	10	.2	0
	4/10	Well	Raw	Ground	0	0		
Arrowbear Lake	5/22	Reservoir	Raw	Ground	58	10	.6	
Arrowhead Springs	3/18	Distribution system	Finished	Ground	0	8		
Baker	4/7	Other	Raw	Ground	23	15	.2	0
	4/7	Well	Raw	Ground	0	3		
Banning	4/29	Distribution system	Finished	Ground	0	3		
	4/28–5/12	Distribution system	Finished	Surface	0	0		
Barstow	4/14	Well	Raw	Ground	8	29	.2	0
	4/15	Well	Raw	Ground	7	3	.3	
	4/7	Distribution system	Finished	Ground	0	0		
Beaumont	4/30	Distribution system	Finished	Surface	0	3		
	4/28	Reservoir	Raw	Ground	0	5		
	4/28	Reservoir	Raw	Ground	0	7		
	4/28	Reservoir	Raw	Ground	0	4		
Big Bear City	5/22	Reservoir	Finished	Ground	0	4		
Big Bear Lake	5/26	Distribution system	Finished	Ground	0	5		
	5/26	Distribution system	Finished	Ground	0	0		
	5/21	Reservoir	Raw	Ground	0	3		
Bloomington	3/20	Well	Raw	Ground	0	33		0
	3/20	Well	Finished	Ground	0	4		
	3/19	Distribution system	Finished	Ground	0	10		
Blue Jay	5/8	Well	Raw	Ground	10	6	.2	
	5/26	Distribution system	Finished	Ground	0	3		
Blythe	4/7	Well	Raw	Ground	0	0		
	3/28	Well	Raw	Ground	0	5		
	3/28	Well	Raw	Ground	0	0		
	4/7	Well	Raw	Ground	0	4		
Cabazon	4/28	Distribution system	Finished	Ground	5	0	0	
	5/7	Well	Raw	Ground	0	0		
	4/28	Other	Raw	Ground	3	20		0
Calimesa	4/28	Well	Raw	Ground	0	4		
	4/29	Well	Raw	Ground	0	5		
	4/29	Well	Finished	Ground	0	0		
	4/29	Well	Raw	Ground	0	16		0
	4/29	Well	Raw	Ground	0	5		
Cathedral City	4/18	Distribution system	Finished	Ground	3	3		
Cedar Glen	5/6	Well	Raw	Ground	0	0		
Cedarpines	5/1	Other	Raw	Ground	0	11	0	0
Cherry Valley	4/28	Well	Raw	Ground	0	5		
	4/28	Well	Raw	Ground	0	8		
	4/28	Well	Raw	Ground	0	0		
	4/28	Well	Raw	Ground	0	7		
Chino	3/20–4/3	Reservoir	Finished	Ground	0	3		
	3/26	Distribution system	Finished	Surface	0	6		
	3/20	Well	Finished	Ground	0	14		0
	3/27	Well	Finished	Ground	0	0		
Claremont	3/20	Well	Raw	Ground	0	13		0
Coachella	5/2	Well	Raw	Ground	0	8		
	5/2	Well	Raw	Ground	0	4		
	5/2	Well	Raw	Ground	0	5		
	5/2	Well	Raw	Ground	0	6		
	5/2	Well	Raw	Ground	3	4		
	5/5	Well	Raw	Ground	0	3		
	5/6	Well	Raw	Ground	0	4		
	5/6	Well	Raw	Ground	4	3	0	
	5/6	Well	Raw	Ground	5	5	0	
	5/8	Well	Raw	Ground	3	3		
	5/5	Well	Raw	Ground	3	8		
	5/6	Well	Finished	Ground	4	7	0	
	5/6	Well	Raw	Ground	3	6		
	5/6	Well	Raw	Ground	0	12		0
	5/5	Well	Finished	Ground	4	3	0	
	5/6	Well	Raw	Ground	0	7		
	5/7	Well	Raw	Ground	0	4		
	5/6	Well	Raw	Ground	3	4		
	5/8	Well	Raw	Ground	0	0		
	5/8	Well	Raw	Ground	0	3		
	5/8	Well	Raw	Ground	5	5	0	
	5/8	Well	Raw	Ground	0	3		
	5/8	Well	Raw	Ground	0	0		

See footnotes at end of table.

Table 9. Radioactivity in community water supplies, 1969, San Bernardino-Riverside-Ontario, California SMSA —continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
California—continued								
Coachella—continued	5/7	Well	Raw	Ground	0	4		
	5/5	Well	Raw	Ground	4	4	0	
	5/7	Well	Raw	Ground	5	7	0.2	
	5/7	Well	Raw	Ground	0	0		
	5/7	Well	Raw	Ground	4	6	0	
	5/6	Well	Raw	Ground	4	4	0	
	5/6	Well	Raw	Ground	0	6		
	5/7	Well	Raw	Ground	4	9	.3	
	5/7	Well	Raw	Ground	5	3	0	
	5/5	Well	Finished	Ground	3	13	0	0
Colton	3/20	Well	Finished	Ground	0	8		
	3/21	Well	Finished	Ground	0	16		0
	3/17	Distribution system	Finished	Other	13	7	0	
	3/20	Distribution system	Finished	Ground	0	8		
	3/18	Well	Finished	Ground	23	6	0	
	3/28	Well	Finished	Ground	0	0		
Corona	4/8	Well	Finished	Ground	0	0		
	4/9–4/22	Treatment plant	Finished	Surface	3	11		0
	4/22	Distribution system	Finished	Ground	12	11	.2	0
Crestline	5/20	Well	Raw	Ground	0	3		
	5/9	Treatment plant	Finished	Ground	0	0		
	5/1	Other	Raw	Ground	0	4		
	5/20	Reservoir	Raw	Ground	0	0		
	5/7	Well	Finished	Ground	0	4		
	5/23	Reservoir	Raw	Ground	0	0		
Cucamonga	3/25–4/8	Reservoir	Finished	Surface	0	6		
	5/2	Distribution system	Finished	Ground	0	0		
Daggett	4/7	Well	Other	Ground	5	4		
Desert Center	4/10	Treatment plant	Finished	Ground	0	0		
Desert Hot Springs	4/17	Well	Finished	Ground	0	4		
	4/17	Reservoir	Raw	Ground	11	9	.2	
	4/17	Well	Raw	Ground	0	5		
	4/17	Reservoir	Raw	Ground	5	8	.2	
Devore	3/24	Other	Finished	Ground	0	7		
	3/24	Well	Finished	Ground	0	9		
Eagle Mountain	4/10	Other	Finished	Ground	0	6		
East Highlands	3/17	Well	Raw	Ground	28	10	.2	
Edgemont	4/14	Well	Raw	Combined	0	6		
Elsinore	4/10	Treatment plant	Finished	Combined	0	16		0
	4/10	Well	Raw	Ground	0	0		
	4/14	Well	Raw	Ground	0	6		
	4/14	Distribution system	Raw	Ground	0	7		
	4/10	Well	Finished	Ground	0	0		
	4/10	Well	Finished	Ground	0	0		
	4/10	Well	Finished	Ground	4	0		
	4/14–4/27	Treatment plant	Finished	Surface	0	0		
Etiwanda	5/1	Well	Raw	Ground	0	4		
Fawnskin	5/1	Well	Finished	Combined	7	3	0	
Fontana	5/2	Other	Finished	Surface	5	7	.3	
	5/6	Other	Raw	Ground	3	0		
	5/6	Well	Raw	Ground	4	3	0	
	5/6	Well	Finished	Ground	0	3		
	5/6	Well	Finished	Ground	5	0	0	
	5/6	Well	Finished	Ground	3	3		
Forest Falls	4/14	Distribution system	Finished	Ground	3	0		
	4/14	Distribution system	Finished	Ground	0	4		
	4/14	Well	Other	Ground	0	5		
	5/19	Distribution system	Finished	Ground	0	0		
Fredalba	5/23	Reservoir	Finished	Ground	0	0		
Glen Avon Heights	4/30	Well	Raw	Ground	0	3		
Green Valley Lake	5/1	Distribution system	Finished	Ground	33	16	.2	0
Havasu Lake	4/11	Well	Raw	Ground	0	8		
	4/15	Treatment plant	Finished	Surface	5	24	.3	0
Hemet	4/16	Distribution system	Finished	Ground	4	5	.4	
	4/15	Well	Finished	Ground	5	0	0	
	4/16–4/29	Treatment plant	Finished	Surface	10	13	.3	3
	4/16	Well	Raw	Ground	6	3	0	
	4/15	Well	Raw	Groond	0	8		
	4/16	Distribution system	Finished	Ground	0	4		
Hesperia	3/24	Well	Finished	Ground	0	8		
	3/24	Well	Finished	Ground	3	3		
	3/24	Well	Finished	Ground	0	0		
Highland	3/19	Well	Finished	Ground	0	11		0
	3/19	Treatment plant	Finished	Ground	11	11	.3	0
	3/28	Well	Finished	Ground	0	0		
Hinkley	4/8	Distriubtion system	Finished	Ground	9	4	0	
Idyllwild	5/28	Reservoir	Finished	Surface	0	0		
	5/29	Distribution system	Finished	Combined	0	0		
	5/29–6/12	Distribution system	Finished	Surface	10	16	4.6	0
	4/30	Distribution system	Finished	Ground	0	6		
Indio	5/8	Well	Raw	Ground	0	4		
	5/7	Well	Finished	Ground	5	0	0	
	5/5	Well	Raw	Ground	4	8	0	

See footnotes at end of table.

Table 9. Radioactivity in community water supplies, 1969, San Bernardino-Riverside-Ontario, California SMSA —continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
California—continued								
Indio	4/16	Well	Raw	Ground	9	9	0	
	4/11	Well	Raw	Ground	4	3	0	
	5/19	Well	Raw	Ground	20	8	0	
	5/5	Well	Raw	Ground	6	4	0	
Johannesburg	4/7	Reservoir	Finished	Ground	0	0		
Joshua Tree	4/15	Well	Finished	Ground	0	5		
	4/9	Well	Raw	Ground	4	0	0	
Kramer Junction	4/8	Distribution system	Finished	Ground	13	8	0	
Lake Arrowhead	5/6–5/20	Treatment plant	Finished	Surface	0	5		
	5/29	Well	Raw	Ground	0	3		
	5/22	Well	Finished	Ground	0	0		
La Quinta	5/2	Distribution system	Finished	Ground	6	8	0	
	5/6	Well	Raw	Ground	0	0		
	5/3–5/17	Well	Finished	Ground	0	3		
	5/2	Well	Raw	Ground	0	0		
La Sierra	3/27	Well	Finished	Ground	9	6	0.3	
	3/27	Well	Finished	Ground	10	11	.2	0
	3/27	Well	Finished	Ground	6	8	.2	
Lenwood	4/9	Distribution system	Finished	Ground	18	4		
	4/15	Well	Finished	Ground	7	4	.3	
Little Morongo Heights	3/28	Well	Raw	Ground	44	21	.4	0
Loma Linda	4/14	Reservoir	Finished	Ground	0	0		
	4/14	Well	Finished	Ground	6	4	0	
	3/18	Well	Raw	Ground	0	0		
	3/18–3/25	Distribution system	Finished	Ground	4	5	0	
	4/14	Reservoir	Finished	Ground	0	0		
Lucerne Valley	4/10	Reservoir	Other	Ground	6	0	0	
	4/10	Distribution system	Finished	Ground	0	0		
	4/10	Distribution system	Finished	Ground	4	0		
	4/9	Well	Finished	Ground	4	4		
	3/25	Well	Finished	Ground	0	17		0
	3/24	Distribution system	Finished	Ground	0	14		0
	3/20	Well	Raw	Ground	0	7		
	3/25	Well	Finished	Ground	0	14		0
	3/20	Well	Raw	Ground	3	3		
Lytle Creek	5/23	Well	Finished	Ground	0	6		
Mecca	5/8	Well	Finished	Ground	0	0		
Mentone	4/9	Distribution system	Finished	Ground	0	0		
	5/19	Distribution system	Finished	Ground	4	3	0	
Mira Loma	4/30	Reservoir	Finished	Ground	0	3		
	4/30	Well	Finished	Ground	4	3	0	
	5/5	Well	Raw	Ground	5	9	0	
Montclair	3/21	Distribution system	Raw	Ground	0	5		
Morongo Valley	4/16	Distribution system	Finished	Ground	18	16	0	0
	4/7	Well	Raw	Ground	14	6	0	
Mountain Center	4/11	Well	Raw	Ground	0	0		
Mt. Baldy	5/20	Distribution system	Finished	Ground	0	4		
	5/19	Distribution system	Finished	Ground	0	0		
	5/27	Distribution system	Finished	Surface	0	0		
Murrieta	4/16	Well	Raw	Ground	0	0		
Muscoy	3/18	Well	Raw	Ground	0	0		
Needles	3/21	Well	Raw	Ground	8	20	0	0
Newberry	4/11	Distribution system	Finished	Ground	8	13	.3	0
Nipton	4/28	Distribution system	Finished	Ground	19	6	0	
Norco	5/6	Well	Raw	Ground	8	3	0	
Nuevo	4/10	Distribution system	Finished	Ground	0	3		
Ontario	3/25	Reservoir	Partially treated	Ground	0	6		
Oro Grande	4/9	Well	Raw	Ground	4	7		
	4/9	Well	Raw	Ground	0	3		
Palm Desert	5/8	Well	Raw	Ground	3	0		
	5/8	Well	Raw	Ground	0	6		
	4/17	Well	Finished	Ground	0	3		
	5/8	Well	Raw	Ground	0	4		
Palm Springs	4/18	Reservoir	Finished	Ground	8	6	0	
	4/29	Well	Finished	Ground	5	4	0	
	4/17–5/1	Reservoir	Raw	Ground	0	0		
	4/18	Well	Raw	Ground	0	10		
Parker Dam	3/24	Well	Raw	Ground	4	7	0	
	3/25–4/7	Treatment plant	Finished	Surface	7	7	.2	
	3/24	Other	Raw	Surface	5	22	.3	4
Perris	4/17	Distribution system	Finished	Combined	3	10		
Phelan	4/10	Other	Raw	Ground	0	6		
Pinon Hills	4/10	Other	Raw	Ground	3	0		
Pioneertown	4/9	Distribution system	Finished	Ground	5	4	0	
Ranch Mirage	4/18	Distribution system	Fihished	Ground	0	8		
Redlands	4/29–5/14	Treatment plant	Finished	Surface	0	3		
	4/29	Well	Raw	Ground	10	4	0	
	4/29	Well	Finished	Ground	0	0		
Rialto	3/24	Well	Raw	Ground	6	8	0	
	3/28	Well	Raw	Ground	0	0		
Rim Forest	5/21	Distribution system	Other	Ground	0	0		
	5/23	Distribution system	Other	Ground	0	0		
	5/27	Well	Raw	Ground	0	0		
	5/27	Distribution system	Finished	Ground	0	0		

See footnotes at end of table.

Table 9. Radioactivity in community water supplies, 1969, San Bernardino-Riverside-Ontario, California SMSA —continued

Location[a]	Collection date (1969)	Sampled from	Water type	Source	Concentration[b] (pCi/liter)			
					Gross alpha	Gross beta	^{226}Ra	^{90}Sr
California—continued								
Riverside	5/1	Other	Finished	Ground	11	3	0	
	5/1	Well	Raw	Ground	0	5		
	5/1	Well	Raw	Ground	0	9		
	5/1	Well	Raw	Ground	14	6	0	
	4/30	Well	Raw	Ground	26	11	0	0
	4/18–30	Treatment plant	Finished	Surface	17	12	0.3	0
	3/26–4/10	Distribution system	Finished	Ground	10	4	0	
	3/26	Well	Raw	Ground	0	0		
	4/8	Well	Raw	Ground	7	6	0	
	4/10	Reservoir	Raw	Ground	5	0	0	
	4/30	Well	Finished	Ground	0	0		
	4/30	Well	Raw	Ground	14	4	0	
	5/8	Distribution system	Finished	Surface	0	12		0
	5/8	Distribution system	Finished	Ground	0	10		
Rubidoux	4/9	Well	Raw	Ground	10	4	0	
	4/9	Well	Raw	Ground	10	6		
Runnings Springs	5/1–5/14	Treatment plant	Finished	Surface	0	3		
San Bernardino	3/21	Distribution system	Finished	Ground	4	4		
	3/18	Well	Finished	Ground	0	0		
	3/18	Well	Raw	Ground	0	0		
	3/18	Well	Raw	Ground	3	7		
	4/15	Distribution system	Finished	Ground	7	11	.2	0
	4/14	Reservoir	Finished	Ground	0	3		
	4/15–4/28	Reservoir	Finished	Combined	0	5		
	4/7	Well	Raw	Ground	0	0		
	4/8	Well	Raw	Ground	7	0	0	
	3/28	Distribution system	Finished	Ground	0	5		
	3/19	Well	Raw	Ground	0	13		0
	3/19	Well	Raw	Ground	0	8		
	3/19	Well	Finished	Ground	8	7	.2	
	3/24	Distribution system	Finished	Ground	0	0		
	3/25	Distribution system	Finished	Ground	0	0		
	3/17–3/31	Distribution system	Finished	Ground	0	0		
	3/17	Well	Raw	Ground	5	3	0	
	3/17	Distribution system	Finished	Ground	0	0		
	3/19	Distribution system	Finished	Ground	0	25		0
	3/17	Well	Finished	Ground	0	0		
	3/19	Reservoir	Finished	Ground	6	20	0	0
San Jacinto	4/16	Well	Raw	Ground	0	4		
	4/16	Well	Raw	Ground	0	3		
Skyforest	5/5	Well	Finished	Ground	22	11	.3	0
	5/26	Distribution system	Finished	Ground	0	0		
Sleepy Hollow	3/27	Distribution system	Finished	Ground	0	0		
Sunnymead	4/10	Well	Raw	Ground	0	0		
	4/15	Well	Other	Ground	0	16		0
Temecula	4/16	Well	Finished	Ground	0	0		
	4/16	Well	Finished	Ground	19	7	0	
	4/16	Well	Finished	Ground	0	0		
Thermal	5/7	Well	Raw	Ground	5	8	0	
Trona	5/5	Distribution system	Finished	Ground	0	0		
	5/5	Distribution system	Finished	Ground	5	7	0	
Twentynine Palms	4/15	Well	Finished	Ground	6	6	0	
Twin Peaks	5/26	Well	Raw	Ground	7	7	.2	
	5/21	Reservoir	Raw	Ground	0	4		
	5/28	Well	Raw	Ground	0	3		
Upland	3/21	Well	Raw	Ground	0	6		
	3/27	Well	Raw	Ground	0	0		
	3/20	Other	Raw	Ground	0	13		0
Victorville	3/20	Well	Raw	Ground	0	17		0
	3/27	Well	Raw	Ground	0	3		
	3/27	Well	Raw	Ground	0	0		
	3/27	Well	Raw	Ground	0	0		
West Palm Springs	4/17	Well	Other	Ground	0	3		
West Riverside	4/9	Well	Raw	Ground	0	6		
Wrightwood	4/11	Well	Other	Ground	0	3		
Yermo	4/9	Well	Partially treated	Ground	11	4	.2	
	4/7	Well	Raw	Ground	13	6	0	
	4/7	Well	Raw	Ground	15	5	.2	
	4/7	Well	Raw	Ground	16	4	0	
Yucaipa	3/21	Reservoir	Finished	Ground	0	7		
	3/27	Distribution system	Finished	Ground	0	0		
	5/21	Distribution system	Finished	Other	0	0		
	3/18	Distribution system	Finished	Ground	0	0		
Yucca Valley	4/8	Well	Other	Ground	18	7		
	4/11	Well	Raw	Ground	4	10	0	
	4/15	Well	Raw	Ground	0	5		
	4/15	Well	Raw	Ground	0	8		

[a] The locations shown are the mailing aldresses for the community from which the water supply was sampled.
[b] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equal to or less than the minimum detectable concentration have been reported as zero.

Table 10. Summary of radiological analyses [a] for each SMSA and Vermont

Location	Gross alpha				Gross beta			
	Number of samples	Number of samples >3 pCi/liter	Range (pCi/liter)	Average (pCi/liter)	Number of samples	Number of samples >10 pCi/liter	Range (pCi/liter)	Average (pCi/liter)
State of Vermont	261	14	0–20	0.5	261	0	0–10	2.1
New York, N.Y. SMSA	254	3	0–8	.1	254	4	0–23	1.5
Charleston, W. Va. SMSA	27	0	0	0	27	0	0–7	1.7
Charleston, S.C. SMSA	20	0	0	0	20	11	0–40	10.7
Cincinnati, Ohio-Ky.-Ind. SMSA	44	0	0–3	.1	44	0	0–7	.3
Kansas City, Mo.-Kans. SMSA	56	3	0–6	.4	56	5	0–23	5.4
New Orleans, La. SMSA	29	0	0	0	29	0	0–6	1.7
Pueblo, Colo. SMSA	22	15	0–377	32.2	22	8	4–154	23.6
San Bernardino-Riverside-Ontario, Calif. SMSA	330	110	0–58	3.4	330	43	0–63	5.3
Summary	1,043	145	0–377	1.9	1,043	71	0–154	3.7

Location	Radium-226				Strontium-90			
	Number of samples	Number of samples >3 pCi/liter	Range (pCi/liter)	Average (pCi/liter)	Number of samples	Number of samples >10 pCi/liter	Range (pCi/liter)	Average (pCi/liter)
State of Vermont	14	0	0–2.7	0.8	0	0	0	0
New York, N.Y. SMSA	1	0	0	0	2	0	0	0
Charleston, W. Va. SMSA	2	0	0	0	3	0	0	0
Charleston, S.C. SMSA	2	0	0	0	7	0	0	0
Cincinnati, Ohio-Ky.-Ind. SMSA	0	0	0	0	0	0	0	0
Kansas City, Mo.-Kans. SMSA	2	1	0.2–4.3	2.3	5	0	0	0
New Orleans, La. SMSA	4	0	0	0	4	0	0	0
Pueblo, Colo. SMSA	15	5	0–136	15.7	6	0	0	0
San Bernardino-Riverside-Ontario, Calif. SMSA	103	1	0–4.6	.1	44	0	0–4	0.2
Summary	143	7	0–136	1.8	71	0	0–4	0.1

[a] The minimum detectable radioactivity is 2 pCi/liter for gross alpha, gross beta, and strontium-90; and 0.1 pCi/liter for radium-226. All values equa to or less than the minimum detectable concentration have been reported as zero.

(*8*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, Cincinnati, Ohio standard metropolitan statistical area (1970).

(*9*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, Kansas City, Kansas-Missouri standard metropolitan statistical area (1970).

(*10*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, New Orleans, Louisiana standard metropolitan statistical area (1970).

(*11*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, Pueblo County, Colorado standard metropolitan statistical area (June 1970).

(*12*) DEPARTMENT OF HEALTH, EDUCATION, AND WELFARE, BUREAU OF WATER HYGIENE. Community water supply study, San Bernardino-Riverside-Ontario, California standard metropolitan statistical area (1970).

(*13*) U.S. PUBLIC HEALTH SERVICE, BUREAU OF RADIOLOGICAL HEALTH. Tritium in community water supplies, 1969. Radiol Health Data Rep 11:692–694 (December 1970).

(*14*) INTERNATIONAL COMMISSION ON RADIOLOGICAL PROTECTION. Recommendations of the International Commission on Radiological Protection. Report of Committee II on Permissible Dose for Internal Radiation (1959).

(*15*) NATIONAL COUNCIL ON RADIATION PROTECTION AND MEASUREMENTS. Basic Radiation Protection Criteria, NCRP Report No. 39. National Council on Radiation Protection and Measurements, Washington, D.C. 20008 (January 15, 1971).

(*16*) FEDERAL RADIATION COUNCIL. Background material for the development of Radiation Protection Standards, Report No. 2. Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402 (September 1961).

SECTION III. AIR AND DEPOSITION

Radioactivity in Airborne Particulates and Precipitation

Continuous surveillance of radioactivity in air and precipitation provides one of the earliest indications of changes in environmental fission product radioactivity. To date, this surveillance has been confined chiefly to gross beta radioanalysis. Although such data are insufficient to assess total human radiation exposure from fallout, they can be used to determine when to modify monitoring in other phases of the environment.

Surveillance data from a number of programs are published monthly and summarized periodically to show current and long-range trends of atmospheric radioactivity in the Western Hemisphere. These include data from activities of the Environmental Protection Agency, the Canadian Department of National Health and Welfare, the Mexican National Institute of Nuclear Energy, and the Pan American Health Organization.

In addition to those programs presented in this issue, the following programs were previously covered in *Radiation Data and Reports.*

Network	Period	Issue
Fallout in the United States and Other Areas, *HASL*	January-December 1970	December 1971
Mexican Air Monitoring Program	February-December 1971	May 1972
Plutonium in Airborne Particulates	October-December 1971	July 1972
Surface Air Sampling Program; 80th Meridian Network, *HASL*	January-December 1969	February 1972

1. Radiation Alert Network May 1972

Division of Atmospheric Surveillance
Environmental Protection Agency

Surveillance of atmospheric radioactivity in the United States is conducted by the Radiation Alert Network (RAN) which regularly gathers samples at 70 locations distributed throughout the country (figure 1). Most of the stations are operated by State health department personnel.

The station operators perform "field estimates" on the airborne particulate samples at 5 hours after collection, when most of the radon daughter products have decayed, and at 29 hours after collection, when most of the thoron daughter products have decayed. They also perform field estimates on dried precipitation samples and report all results to appropriate Environmental Protection Agency officials by mail or telephone depending on levels found. A compilation of the daily field estimates is available upon request from the Air Quality Information Systems Branch, Division of Atmospheric Surveillance, EPA, Research Triangle Park, N.C. 27711. A detailed description of the sampling and analytical procedures was presented in the March 1968 issue of *Radiological Health Data and Reports*.

Table 1 presents the monthly average gross beta radioactivity in surface air particulates and deposition by precipitation, as measured by the field estimate technique, during May 1972.

One station reported a high reading in a single sample of precipitation for May: Jacksonville, Fla.—23 nCi/m² on May 30. All other field estimates reported were within normal limits for the reporting station.

Figure 1. Radiation Alert Network sampling stations

Table 1. Gross beta radioactivity in surface air and precipitation, May 1972

Station location		Number of samples	Gross beta radioactivity (5-hour field estimate) (pCi/m³)			Number of samples	Total depth (mm)	Precipitation		
			Maximum	Minimum	Average[a]			Field estimation of deposition		
								Number of samples	Depth (mm)	Total deposition (nCi/m²)
Ala:	Montgomery	19	2	0	1	3	46	3	46	17
Alaska:	Anchorage	2	0	0	0	0				
	Attu Island	0				0				
	Fairbanks	0				0				
	Juneau	1	2	2	2	0				
	Kodiak	0				0				
	Nome	0				0				
	Point Barrow	0				0				
Ariz:	Phoenix	22	6	1	3	0				
Ark:	Little Rock	20	2	0	1	0				
Calif:	Berkeley	22	1	0	0	0				
	Los Angeles	22	1	0	1	0				
C.Z:	Ancon	17	0	0	0	0				
Colo:	Denver	20	6	1	2	4	17	[b]		
Conn:	Hartford	22	1	0	0	11	101	11	101	0
Del:	Dover	21	1	0	0	0				
D.C:	Washington	26	1	0	0	0				
Fla:	Jacksonville	22	1	0	0	8	183	8	183	41
	Miami	6	0	0	0	2	65	2	65	0
Ga:	Atlanta	22	2	0	1	0				
Guam:	Agana	0				0				
Hawaii:	Honolulu	22	1	0	0	0		[b]		
Idaho:	Boise	10	3	0	1	1	78	1	78	10
Ill:	Springfield	15	8	0	2	0				
Ind:	Indianapolis	21	2	0	1	0				
Iowa:	Iowa City	19	4	0	1	4	84	4	84	5
Kans:	Topeka	21	3	0	1	8	104	8	104	14
Ky:	Frankfort	0				0				
La:	New Orleans	21	0	0	0	6	176	[b]		
Maine:	Augusta	13	1	0	0	3	17	3	17	0
Md:	Baltimore	20	2	0	0	7	63	7	63	0
Mass:	Lawrence	22	1	0	0	7	109	7	109	0
	Winchester	20	1	0	0	8	127	8	127	0
Mich:	Lansing	20	1	0	0	7	47	7	47	8
Minn:	Minneapolis	22	3	0	1	6	68	6	68	11
Miss:	Jackson	17	2	0	1	5	117	5	117	2
Mo:	Jefferson City	21	7	0	2	4	61	4	61	0
Mont:	Helena	20	3	0	1	5	28	5	28	0
Nebr:	Lincoln	19	7	1	2	4	78	4	78	15
Nev:	Las Vegas	21	2	1	1	0				
N.H:	Concord	0				0				
N.J:	Trenton	21	1	0	0	10	124	10	124	7
N. Mex:	Santa Fe	21	3	1	1	0				
N.Y:	Albany	16	1	0	0	0				
	Buffalo	22	2	0	1	0				
	New York City	0				0				
N.C:	Gastonia	21	7	0	2	4	67	[b]		
N. Dak:	Bismarck	21	6	0	2	8	94	8	94	12
Ohio:	Cincinnati	0				0				
	Columbus	4	1	1	1	0				
	Painesville	21	1	0	0	10	81	10	81	21
Okla:	Oklahoma City	11	3	1	1	1	47	1	47	0
	Ponca City	21	6	0	2	4	50	4	50	0
Oreg:	Portland	19	1	0	0	8	74	8	74	4
Pa:	Harrisburg	17	2	0	0	1	8	1	8	3
P.R:	San Juan	0			0		[b]			
R.I:	Providence	21	1	0	0	1	2	1	2	0
S.C:	Columbia	12	6	0	1	9	138	9	138	0
S. Dak:	Pierre	22	3	0	1	0				
Tenn:	Nashville	19	3	0	1	6	79	6	79	6
Tex:	Austin	21	7	0	2	0				
	El Paso	9	4	1	1	0				
Utah:	Salt Lake City	30	2	0	1	2	5	2	5	1
Vt:	Barre	22	3	1	1	9	72	9	72	7
Va:	Richmond	19	0	0	0	1	8	1	8	4
Wash:	Seattle	9	0	0	0	2	10	[b]		
	Spokane	20	2	0	1	0				
W. Va:	Charleston	21	3	0	1	12	69	12	69	13
Wisc:	Madison	21	2	0	1	6	68	6	68	5
Wyo:	Cheyenne	22	10	0	3	3	23	3	23	10
Network summary		1,091	10	0	1	200	78	6	70	7

[a] The monthly average is calculated by weighting the field estimates of individual air samples with length of sampling period.
[b] This station is part of the tritium surveillance system. No gross beta measurements are done.

2. Canadian Air and Precipitation Monitoring Program,[1] May 1972

Radiation Protection Division
Department of National Health and Welfare

The Radiation Protection Division of the Canadian Department of National Health and Welfare monitors surface air and precipitation in connection with its Radioactive Fallout Study Program. Twenty-four collection stations are located at airports (figure 2), where the sampling equipment is operated by personnel from the Meteorological Services Branch of the Department of Transport. Detailed discussions of the sampling procedures, methods of analysis, and interpretation of results of the radioactive fallout program are contained in reports of the Department of National Health and Welfare (*1–5*).

A summary of the sampling procedures and methods of analysis was presented in the May 1969 issue of *Radiological Health Data and Reports.*

[1] Prepared from information and data obtained from the Canadian Department of National Health and Welfare, Ottawa, Canada.

Surface air and precipitation data for May 1972 are presented in table 2.

Table 2. Canadian gross beta radioactivity in surface air and precipitation, May 1972

Station	Number of samples	Air surveillance gross beta radioactivity (pCi/m³)			Precipitation measurements	
		Maximum	Minimum	Average	Average concentration (pCi/liter)	Total deposition (nCi/m²)
Calgary	5	0.2	0.0	0.1	33	1.0
Coral Harbour	5	.1	.0	.0	21	.5
Edmonton	5	.2	.0	.1	163	7.2
Ft. Churchill	5	.1	.0	.1	89	4.3
Fredericton	4	.1	.1	.1	40	3.3
Goose Bay	5	.1	.0	.0	77	2.9
Halifax	3	.1	.0	.1	50	8.1
Inuvik	5	.0	.0	.0	143	2.1
Montreal	5	.1	.1	.1	104	7.1
Moosonee	5	.1	.1	.1	(a)	8.9
Ottawa	5	.1	.1	.1	61	3.2
Quebec	5	.1	.0	.1	60	5.4
Regina	5	.2	.1	.1	96	6.9
Resolute	5	.1	.0	.1	19	.1
St. John's, Nfld	5	.1	.0	.1	51	3.9
Saskatoon	5	.2	.1	.1	111	4.6
Sault Ste. Marie	5	.2	.1	.1	89	4.8
Thunder Bay	5	.1	.0	.1	53	2.4
Toronto	5	.1	.1	.1	85	4.1
Vancouver	5	.1	.0	.1	247	7.9
Whitehorse	5	.1	.0	.1	86	2.8
Windsor	5	.1	.1	.1	108	5.8
Winnipeg	5	.1	.1	.1	220	6.3
Yellowknife	5	.0	.0	.0	NS	NS
Network summary	117	0.2	0.0	0.1	91	4.5

[a] Precipitation, <0.3 inches. NS, no sample.

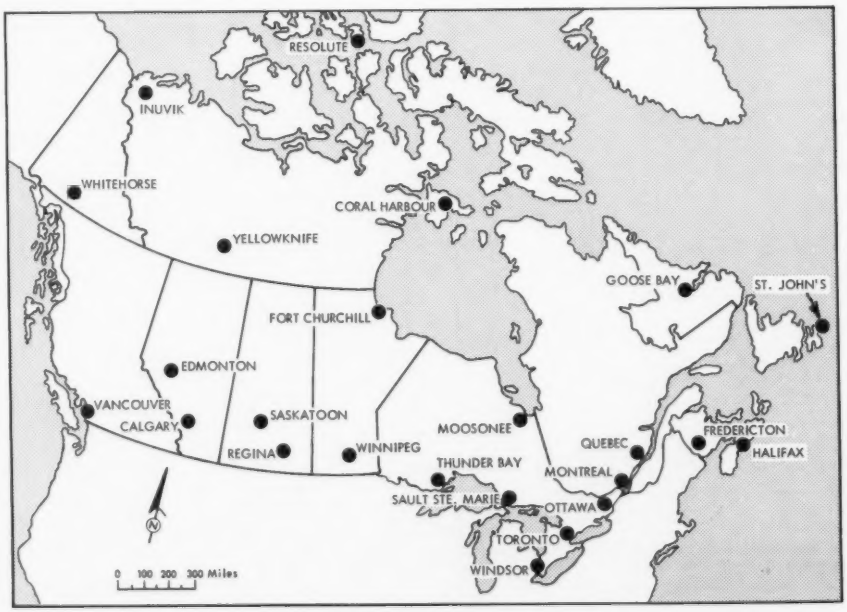

Figure 2. Canadian air and precipitation sampling stations

3. Pan American Air Sampling Program May 1972

Pan American Health Organization and U.S. Environmental Protection Agency

Gross beta radioactivity in air is monitored by countries in the Americas under the auspices of the collaborative program developed by the Pan American Health Organization (PAHO) and the U.S. Environmental Protection Agency (EPA) to assist PAHO-member countries in developing radiological health programs.

The air sampling station locations are shown in figure 3. Analytical techniques were described in the March 1968 issue of *Radiological Health Data and Reports*. The May 1972 air monitoring results from the participating countries are given in table 3.

Figure 3. Pan American Air Sampling Program stations

Table 3. Summary of gross beta radioactivity in Pan American surface air, May 1972

Station location		Number of samples	Gross beta radioactivity (pCi/m³)		
			Maximum	Minimum	Average[a]
Argentina:	Buenos Aires	0			
Bolivia:	La Paz	0			
Chile:	Santiago	31	0.13	0.01	0.06
Colombia:	Bogota	21	0.3	.00	.00
Ecuador:	Cuenca	0			
	Guayaquil	9	.08	.03	.05
	Quito	0			
Guyana:	Georgetown	0			
Jamaica:	Kingston	0			
Peru:	Lima	0			
Venezuela:	Caracas	13	.11	.00	.03
West Indies:	Trinidad	13	.44	.05	.14
Pan American summary		87	.44	.00	.05

[a] The monthly average is calculated by weighting the individual samples with length of sampling period. Values less than 0.005 pCi/m³ are reported and used in averaging as 0.00 pCi/m³.

4. California Air Sampling Program May 1972

Bureau of Radiological Health California State Department of Public Health

The Bureau of Radiological Health of the California State Department of Public Health with the assistance of several cooperating agencies and organizations operates a surveillance system for determining radioactivity in airborne particulates. The air sampling locations are shown in figure 4.

All air samples are sent to the Sanitation and Radiation Laboratory of the State Department of Public Health where they are analyzed for their radioactive content.

Airborne particles are collected by a continu-

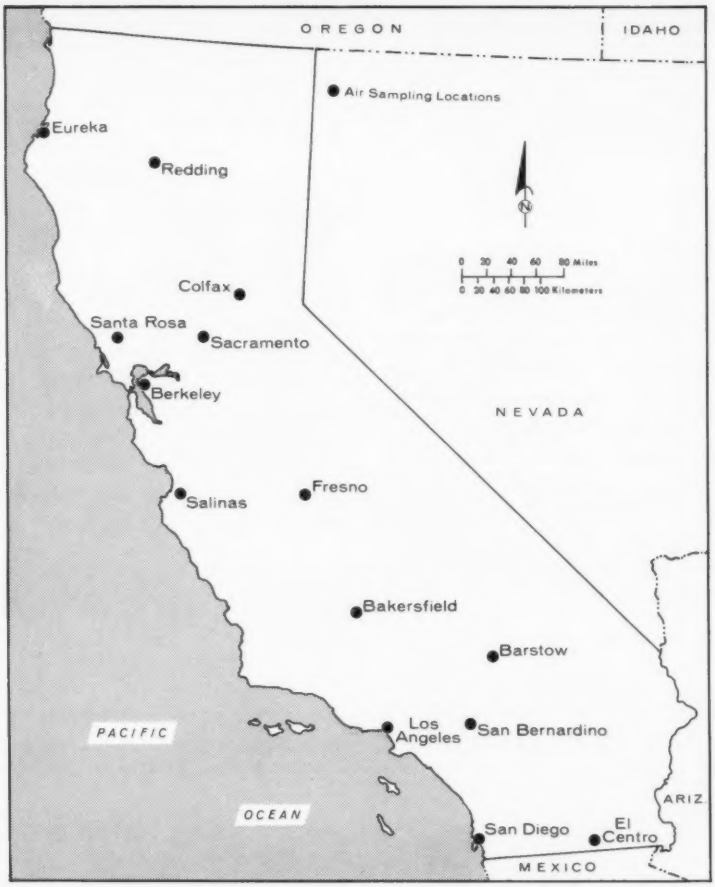

Figure 4. California Air Sampling Program stations

ous sampling of air filtered through a 47 millimeter membrane filter, 0.8 micron pore size, using a Gast air pump of about 2 cubic feet per minute capacity, or 81.5 cubic meters per day. Air volumes are measured with a direct reading gas meter. Filters are replaced every 24 hours except on holidays and weekends. The filters are analyzed for gross alpha and beta radioactivity 72 hours after the end of the collection period. The daily samples are then composited into a monthly sample for gamma spectroscopy and an analysis for strontium-89 and strontium-90. Table 4 presents the monthly gross beta radioactivity in air for May 1972. The monthly sample results are presented quarterly.

Table 4. Gross beta radioactivity in California air May 1972

Station location	Number of samples	Gross beta radioactivity[a] (pCi/m³)		
		Maximum	Minimum	Average
Bakersfield	31	1.16	0.08	0.40
Barstow	31	4.42	.13	.72
Berkeley	30	.88	.01	.19
Colfax	31	.68	.07	.34
El Centro	31	2.66	.04	.75
Eureka	28	.54	.04	.11
Fresno	30	.95	.11	.45
Los Angeles	30	.75	.06	.26
Redding	31	.80	.10	.39
Sacramento	28	1.41	.05	.36
Salinas	31	.62	.12	.28
San Bernardino	31	1.03	.19	.43
San Diego	30	.46	.06	.27
Santa Rosa	31	.69	.02	.20
Summary	424	4.42	0.01	0.47

[a] Single sample taken at Orange, Calif., May 15, 1972, resulted in a gross beta activity of 0.17. This sample is not included in summary.

5. Mexican Air Monitoring Program January–April 1972

Instituto Nacional de Energía Nuclear
México, D.F.

Until December 1971, the Radiation Surveillance Network of Mexico was operated by the Comision Nacional de Energía Nuclear (CNEN). In December 1971, the CNEN became the Instituto Nacional de Energía Nuclear (INEN), as a result of a new law passed by Congress.

In the Instituto Nacional de Energía Nuclear, the Comite de Seguridad Radiológica (Radiological Security Committee) (CSR) is responsible for radiological protection. The Environmental Radioactivity Section (Sección de Radioactividad Ambiental) of the CSR is in charge of monitoring and measuring environmental radioactive contamination in general, including radiation in mines, uranium milling plant and the Nuclear Center of Mexico.

Table 5. Mexican gross beta radioactivity of airborne particulates, January–April 1972

Station	Gross beta radioactivity (pCi/m³)			
	January	February	March	April
Chihuahua:				
Maximum	0.73	0.63	<0.20	0.54
Minimum	<.20	<.20	<.20	<.20
Average	.21	.25	<.20	.32
Ensenada:				
Maximum	.67	.87	NS	<.20
Minimum	<.20	<.20	NS	<.20
Average	<.20	<.20	NS	<.20
Mérida:				
Maximum	.30	.56	<.20	.64
Minimum	<.20	<.20	<.20	<.20
Average	<.20	<.20	<.20	<.20
México, D.F:				
Maximum	<.20	NS	<.20	<.20
Minimum	<.20	NS	<.20	<.20
Average	<.20	NS	<.20	<.20
Torreón:				
Maximum	<.20	NS	<.20	.61
Minimum	<.20	NS	<.20	<.20
Average	<.20	NS	<.20	<.20
Veracruz:				
Maximum	NS	NS	<.20	<.20
Minimum	NS	NS	<.20	<.20
Average	NS	NS	<.20	<.20

NS, no sample.

Figure 5. Mexican air sampling locations

Since radioactivity in air particulates have decreased to very low levels in the past few years, the objective of the air monitoring program has been changed from an alert type of network to emphasize dose assessment.

Measurements will continue in the following 6 areas: México City, D.F.; Chihuahua; Ensenada; Torreón; Veracruz; and Mérida (figure 5). The sampling and analysis procedures were described previously (*6*).

The maximum, minimum, and average beta radioactivity in surface air from January through April 1972 are presented in table 5. Statistically it has been found that a minimum of five samples per month was needed to get a reliable average radioactivity at each station (*7*).

REFERENCES

(*1*) BIRD, P. M., A. H. BOOTH, and P. G. MAR. Annual report of 1959 on the Radioactive Fallout Study Program, CNHW–RP–3. Department of National Health and Welfare, Ottawa, Canada (May 1960).

(*2*) BIRD, P. M., A. H. BOOTH, and P. G. MAR. Annual report for 1960 on the Radioactive Fallout Study Program, CNHW–RP–4. Department of National Health and Welfare, Ottawa, Canada (December 1961).

(*3*) MAR, P. G. Annual report for 1961 on the Radioactive Fallout Study Program, CNHW–RP–5. Department of National Health and Welfare, Ottawa, Canada (December 1962).

(*4*) BEALE, J. and J. GORDON. The operation of the Radiation Protection Division Air Monitoring Program, RPD–11. Department of National Health and Welfare, Ottawa, Canada (July 1962).

(*5*) BOOTH, A. H. The calculation of permissible levels of fallout in air and water and their use in assessing the significance of 1961 levels in Canada, RPD–21. Department of National Health and Welfare, Ottawa, Canada (August 1962).

(*6*) INSTITUTO NACIONAL DE ENERGIA NUCLEAR. Mexican air monitoring program, August–December 1970 and January 1971. Radiol Health Data Rep 12:525–528 (October 1971).

(*7*) VASQUEZ, M. and R. M. DE NULMAN. Estudios sobre la radioactividad ambiental en la Republica Mexicana, 1963–1965. Comision Nacional de Energia Nuclear, Direccion General de Seguridad Radiologica (1966).

Air Surveillance Network, May 1970

National Environmental Research Center—Las Vegas,[1] Environmental Protection Agency

The Air Surveillance Network[2] (ASN), operated by the National Environmental Research Center—Las Vegas (NERC–LV), consists of 104 active and 18 standby sampling stations located in 21 western States (figures 1 and 2). The network is operated in support of nuclear testing sponsored by the Atomic Energy Commission (AEC) at the Nevada Test Site (NTS), by the Space Nuclear Systems Office at the Nuclear Rocket Development Station which lies within the NTS, and by the AEC at any other designated testing sites.

[1] Formerly the Western Environmental Research Laboratory.

[2] The ASN is operated under a Memorandum of Understanding (No. AT(26–1)–539) with the Nevada Operations Offict, U.S. Atomic Energy Commission.

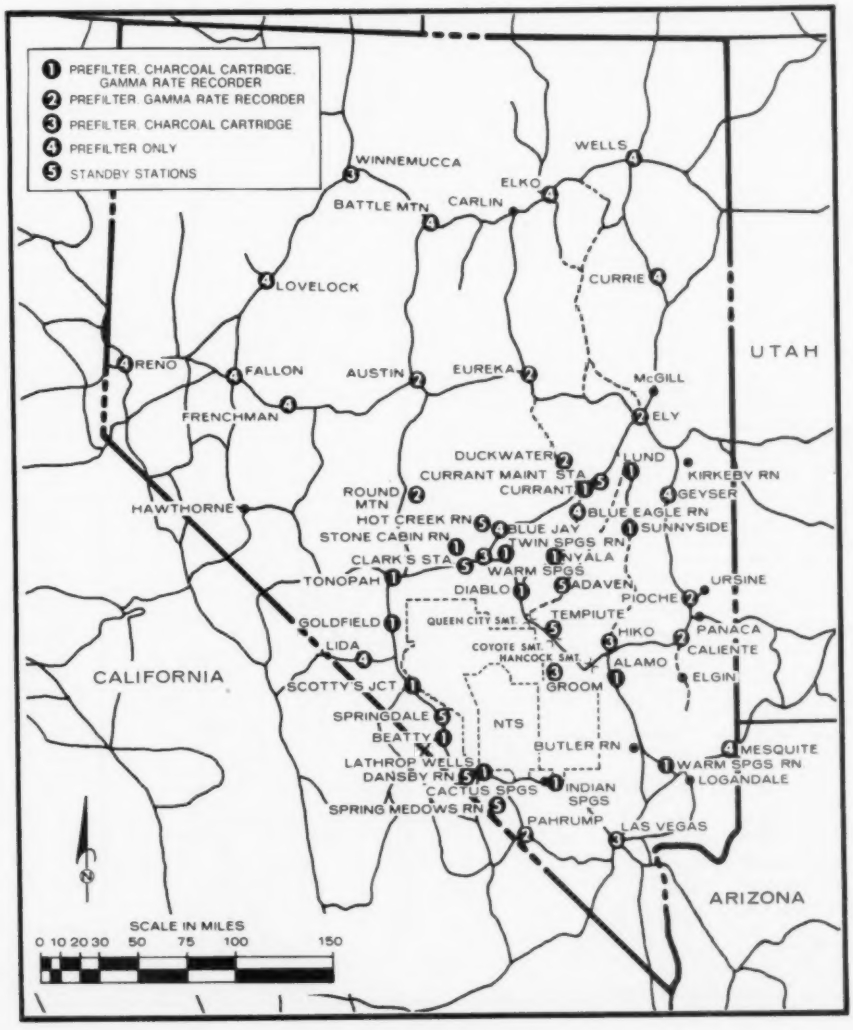

Figure 1. NERC–LV Air Surveillance Network stations in Nevada

Table 1. Summary of gross beta radioactivity concentrations in air, May 1972

Location		Number of samples	Concentration (pCi/m³)		
			Maximum	Minimum	Average[a]
Ariz:	Phoenix	29	1.1	<0.1	0.6
	Seligman	31	1.0	.2	.6
	Winslow	31	1.3	.3	.6
Ark:	Little Rock	21	.6	<.1	.3
Calif:	Baker	27	.7	.1	.4
	Barstow	31	1.2	.2	.5
	Bishop	31	1.1	<.1	.6
	Death Valley Junction	30	1.0	.2	.5
	Furnace Creek	29	1.1	.2	.6
	Indio	31	.9	<.1	.4
	Lone Pine	29	1.0	<.1	.5
	Needles	24	1.3	.3	.6
	Ridgecrest	30	1.2	.1	.5
	Shoshone	31	1.1	.2	.5
Colo:	Denver	23	.9	.2	.5
	Durango	31	1.3	.2	.5
Idaho:	Boise	30	1.1	<.1	.5
	Idaho Falls	23	.9	.2	.4
	Preston	30	.7	<.1	.4
	Twin Falls	31	.9	<.1	.5
Iowa:	Iowa City	22	.7	.1	.3
	Sioux City	27	.9	<.1	.4
Kans:	Dodge City	31	.9	<.1	.3
La:	Lake Charles	22	.5	<.1	.4
	Monroe	21	.6	.1	.4
	New Orleans	21	.5	<.1	.3
Minn:	Minneapolis	20	.7	.1	.3
Mo:	Joplin	31	.8	<.1	.3
	St. Joseph	31	.7	<.1	.4
	St. Louis	30	.9	<.1	.4
Nebr:	North Platte	13	.4	.1	.3
Nev:	Alamo	31	1.3	.2	.5
	Austin	19	.9	.2	.5
	Battle Mountain	31	1.1	.1	.5
	Beatty	31	1.0	.3	.5
	Blue Eagle Ranch (Currant)	28	1.5	.3	.6
	Blue Jay	31	1.0	.2	.5
	Caliente	31	1.0	.2	.5
	Currant Ranch	31	1.3	.3	.6
	Currie	31	.8	<.1	.5
	Diablo	31	.8	.2	.5
	Duckwater	24	1.0	<.1	.5
	Elko	31	.9	.1	.5
	Ely	30	.9	<.1	.5
	Eureka	31	.8	.2	.5
	Fallini's Twin Springs Ranch	31	.9	.2	.5
	Fallon	31	1.9	.1	.6
	Frenchman Station	31	.8	<.1	.5
	Geyser Maintenance Station	31	1.0	<.1	.6
	Goldfield	30	1.5	.3	.6
	Groom Lake	29	1.1	.2	.5
	Hiko	31	1.2	.1	.5
	Indian Springs	31	.8	.1	.4
	Las Vegas	22	1.0	.2	.6
	Lathrop Wells	27	.9	.3	.5
	Lida	31	1.8	.2	.6
	Lovelock	31	1.0	.1	.5
	Lund	27	.8	.2	.5
	Mesquite	31	1.0	.3	.5
	Nyala	31	1.5	<.1	.6
	Pahrump	23	1.1	.2	.4
	Pioche	31	1.0	.1	.5
	Reno	30	.9	<.1	.5
	Round Mountain	30	.7	<.1	.5
	Scotty's Junction	29	1.0	.3	.5
	Stone Cabin Ranch	31	1.0	.2	.5
	Sunnyside	29	1.4	.1	.6
	Tonopah	31	1.1	.2	.5
	Tonopah Test Range	26	.8	.2	.4
	Warm Springs Ranch	31	1.3	.2	.5
	Wells	31	1.1	<.1	.5
	Winnemucca	31	1.1	<.1	.5
N. Mex:	Albuquerque	22	1.1	.2	.5
	Carlsbad	27	1.0	<.1	.5
Okla:	Muskogee	31	.7	<.1	.3
Oreg:	Burns	31	1.1	.1	.4
	Medford	25	.7	<.1	.3
S. Dak:	Aberdeen	30	.9	<.1	.3
	Rapid City	29	1.1	<.1	.3
Tex:	Abilene	28	1.3	.1	.5
	Amarillo	30	.9	.1	.4
	Austin	22	1.1	.2	.4
	Fort Worth	31	.8	<.1	.4

See footnotes at end of table.

Table 1. Summary of gross beta radioactivity concentrations in air, May 1972 —continued

Location		Number of samples	Concentration (pCi/m³)		
			Maximum	Minimum	Average[a]
Utah:	Bryce Canyon	21	.6	.2	.5
	Cedar City	30	1.0	.1	.6
	Delta	30	.9	<.1	.5
	Dugway	31	1.1	.1	.5
	Enterprise	31	.8	.2	.5
	Garrison	31	.9	<.1	.4
	Logan	31	.8	<.1	.4
	Milford	30	.9	.2	.5
	Monticello	30	1.3	<.1	.6
	Parowan	19	1.2	<.1	.5
	Provo	29	1.1	.2	.6
	Roosevelt	29	.9	<.1	.4
	Salt Lake City	31	1.0	.1	.5
	St. George	31	1.4	.3	.6
	Wendover	30	1.0	.1	.6
Wash:	Seattle	22	.4	<.1	.2
	Spokane	22	.4	<.1	.2
Wyo:	Rock Springs	31	.7	.1	.4
	Worland	31	.5	<.1	.3

[a] Individual values less than the minimum detectable concentration (MDC) are set equal to the MDC for averaging. A monthly average less than the minimum reportable value of 0.1 pCi/m³ is reported as <0.1.

Figure 2. NERC–LV Air Surveillance Network stations outside Nevada

The stations are operated by State health department personnel and by private individuals on a contract basis. Daily 24-hour samples are collected at each station. All samples are mailed to the NERC–LV unless special retrieval is arranged at selected locations in support of known releases of radioactivity from the NTS. A complete description of sampling and analytical procedures was presented in the February 1972 issue of *Radiation Data and Reports.*

Results

Table 1 presents the monthly average gross beta radioactivity in air particulates for each of the network stations. The minimum reported concentration for gross beta is 0.1 pCi/m^3; however, gross beta concentrations above the minimum detectable concentration of 0.06 pCi/m^3 are used in determining averages. Individual concentrations which are below the minimum detectable concentration are assumed to be equal to the minimum detectable concentration. Averages less than the minimum reported level are reported as $<$0.1 pCi/m^3. The highest gross beta concentration within the network on a single filter during May was 1.9 pCi/m^3 at Fallon, Nev.

From gamma spectrometry results, cerium-141, ruthenium-103, and zirconium-95 in varying combinations were identified on samples collected in Arizona, California, Nevada, New Mexico, Texas, and Utah. The highest concentrations of these radionuclides, respectively, were 0.2 pCi/m^3 at Barstow, Calif.; 0.1 pCi/m^3 at Caliente and Las Vegas, Nev.; and 0.8 pCi/m^3 at Groom Lake, Nev. These radionuclides are attributed to annual worldwide fallout.

Copies of this summary and listings of the daily gross beta and gamma spectrometry results are distributed to EPA regional offices and appropriate State agencies. Additional copies of the daily results may be obtained from the NERC–LV upon written request.

SECTION IV. OTHER DATA

This section presents results from routine sampling of biological materials and other media not reported in the previous sections. Included here are such data as those obtained from human bone sampling, Alaskan surveillance, and environmental monitoring around nuclear facilities.

Offsite Surveillance Around the Nevada Test Site January–June 1969[1]

National Environmental Research Center—
Las Vegas, EPA,[2] and
Nevada Operations Office, AEC

Under a Memorandum of Understanding with the U.S. Atomic Energy Commission, the Southwestern Radiological Health Laboratory (SWRHL) conducted its continuing program of radiological surveillance, including monitoring and environmental sampling, in the public areas surrounding the Nevada Test Site (NTS) from January through June 1969. During this period, 11 announced underground nuclear tests were conducted at the NTS. None of these tests released radioactivity that was detected offsite. One Experimental Plan (test) of the XE–Prime reactor test series was conducted at the Nuclear Rocket Development Station (NRDS), a part of the NTS complex, and released radioactive effluent that was detected offsite. Additional amounts of radioactivity found on air samples during this period are attributed to Project Schooner, a cratering experiment conducted in December 1968.

Operational procedures

Comprehensive ground monitoring capabilities were maintained throughout the period. Mobile ground monitoring teams were positioned in offsite areas prior to each event. Each monitor was equipped with an Eberline E–500B survey meter, a Baird-Atomic Model NE–148A Scintillator, and a Victoreen Radector, Model No. AGB–50B–Sr. Eberline RM–11 gamma-rate recorders were also used to document cloud passage at fixed ground locations. Aerial monitoring capabilities included a USAF aircraft carrying two SWRHL monitors equipped with portable instruments identical to those of the ground monitoring teams. Immediately after the release of radioactivity this aerial monitoring team tracked the cloud, determined its relative radiation intensity and reported its position, speed and direction to assist in positioning ground monitors. Two SWRHL aircraft also aided in cloud tracking and performed cloud sampling as required.

The SWRHL Air Surveillance Network (ASN) consisted of 103 stations operating in every State west of the Mississippi River except Montana and North Dakota (figure 1). The air sampler used was a Gelman "Tempest" which was equipped to use a 4-inch-diameter Whatman 541 filter paper and an MSA charcoal cartridge.

In addition to air sampling, milk, water and vegetation samples were collected and analyzed. The routine milk sampling program was continued through this period, collecting a total of 215 samples from both commercial dairies and private producers. Five hundred and thirty-two water samples, including 36 samples taken for Project Rulison background information, were collected from 95 sources of both potable and

[1] This article is a summary of report No. SWRHL–97r, "Offsite Surveillance Activities of the Southwestern Radiological Health Laboratory from January through June 1969."

[2] Formerly the Southwestern Radiological Health Laboratory, U.S. Department of Health, Education, and Welfare, Public Health Service, Bureau of Radiological Health.

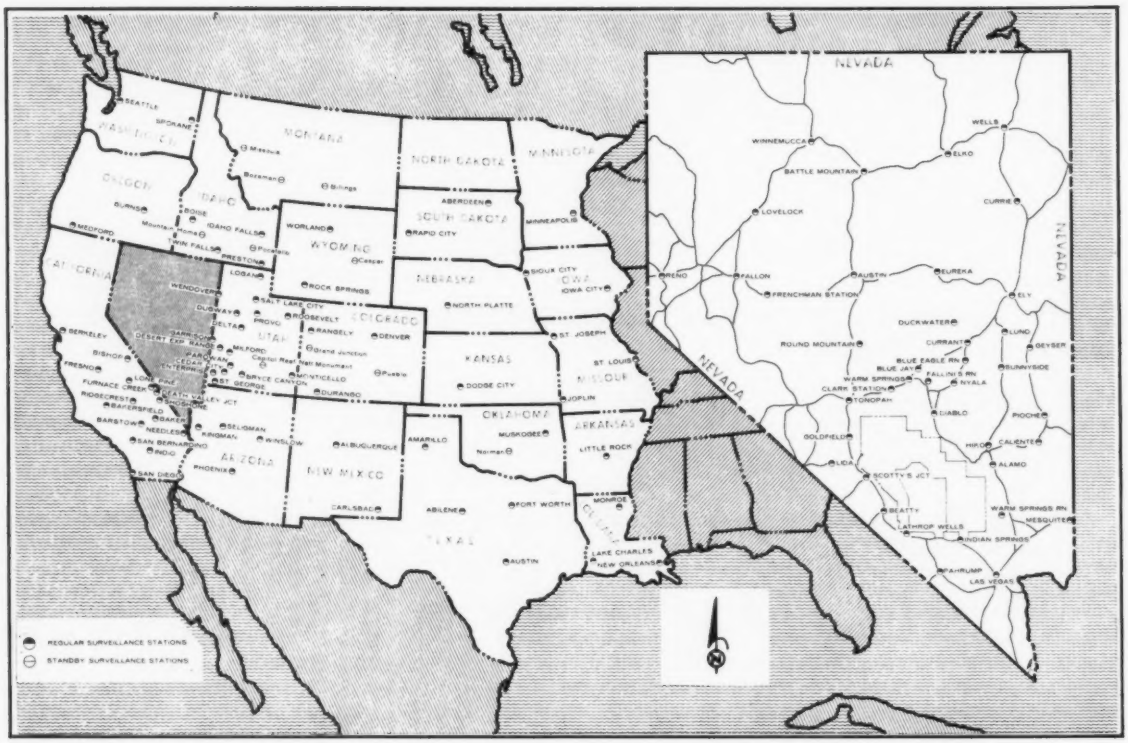

Figure 1. NERC–LV Air Surveillance Network stations

nonpotable supplies. Vegetation samples, collected to delineate any fallout pattern, consisted of milk cow feed samples taken at most locations where milk was collected.

Approximately 87 residents in the offsite area were issued film badge dosimeters during this period and five film badges were placed at each of 107 dosimetry stations. The DuPont type 545 film in the badge has a 30 mR lower limit of detection. All stations were also equipped with three EG&G TL–12 thermoluminescent dosimeters (TLD's) which have a 5 mR lower limit of detection.

A SWRHL medical officer was available to investigate reports of injuries alleged to be the result of the test series and to maintain liaison with local physicians. No injuries were reported. Veterinarian services were also provided by the SWRHL to conduct wildlife and domestic livestock investigations. Other community relations services included personal contact with offsite residents by route monitors and through numerous information presentations conducted at schools and civic centers. As a result, many offsite residents participated in the sampling program. All routine air sampling stations except Las Vegas stations were operated by local citizens.

Analytical procedures

All samples were analyzed at the SWRHL in Las Vegas. Air sample particulate filters were counted for beta radioactivity in a Beckman Widebeta low background, proportional counter system. Selected particulate filters, all charcoal cartridges, and water and milk samples were analyzed for gamma-emitting isotopes; a 4- by 4-inch NaI(Tl) crystal coupled to a TMC gamma pulse height analyzer was used. The lower limit of detection for gamma emit-

ters in milk samples was 20 pCi/liter at the time of count. Gamma spectra were evaluated using a matrix technique which allowed for the determination of eight nuclides simultaneously.

Results

The only release of radioactive material detected offsite during this period resulted from a power run of the XE-Prime nuclear rocket engine on June 11. Radioactive material, primarily tungsten-181, was also found early in the year and attributable to resuspension of radioactive debris deposited on- and offsite after the Schooner test on December 8, 1968.

The singular indication at ground level of radioactivity released by XE-Prime was from an air sample collected at the Diablo Maintenance Station on Highway 25, Nevada. The gross beta particulate concentration from 0645 hours, June 11 through 0645 hours, June 12 was 2.4 pCi/m^3. A total of 0.7 pCi/m^3 of iodine-131 was determined from the filter and charcoal cartridge.

No fresh fission products were found in any milk, water, or vegetation samples and no readings above background were recorded by exposure rate instruments or dosimetry media.

Small concentrations of tungsten-181, attributable to Project Schooner, were occasionally found on air sample filters to the north-northwest of the NTS through March 1969. The highest concentration was found at Clark Station on January 13 and measured 55 pCi/m^3 gross beta.

Conclusions

Results obtained through environmental radiation surveillance during this period indicate that no individual in the offsite area received an exposure, resulting from NTS operations, which exceeded the guides established by the AEC and/or recommended by the Federal Radiation Council.

Environmental Levels of Radioactivity at Atomic Energy Commission Installations

The U.S. Atomic Energy Commission (AEC) receives from its contractors semiannual reports on the environmental levels of radioactivity in the vicinity of major Commission installations. The reports include data from routine monitoring programs where operations are of such a nature that plant environmental surveys are required.

Releases of radioactive materials from AEC installations are governed by radiation standards set forth by AEC's Division of Operational Safety in directives published in the "AEC Manual."[1]

A summary of the environmental radioactivity data follow for the Brookhaven National Laboratory and Neutron Devices Department.

[1] Title 10, Code to Federal Regulations, Part 20, "Standards for Protection Against Radiation" contains essentially the standards published in Chapter 0524 of the AEC Manual.

1. Brookhaven National Laboratory[2] July–December 1969

Associated Universities, Inc.
Upton, N.Y.

The Brookhaven National Laboratory (BNL) operations may affect the environmental levels of radiation in three ways: (1) by radioactivity in the cooling air from the research reactors, (2) by radiation from an ecology forest gamma-ray source, and (3) by low-level radioactive liquid wastes released to a stream that forms one of the headwaters of the Peconic River (figure 1). The radiation levels resulting from reactor air effluent and the ecology forest source are monitored continuously by four stations located at the site boundary. The liquid waste effluent from the laboratory sewage processing plant is monitored continuously at the point where the stream leaves the site.

[2] Summarized from "Effects of Brookhaven National Laboratory on Environmental Levels of Radioactivity during the Second Half of 1969," Associated Universities, Inc., Upton, N.Y. 11973.

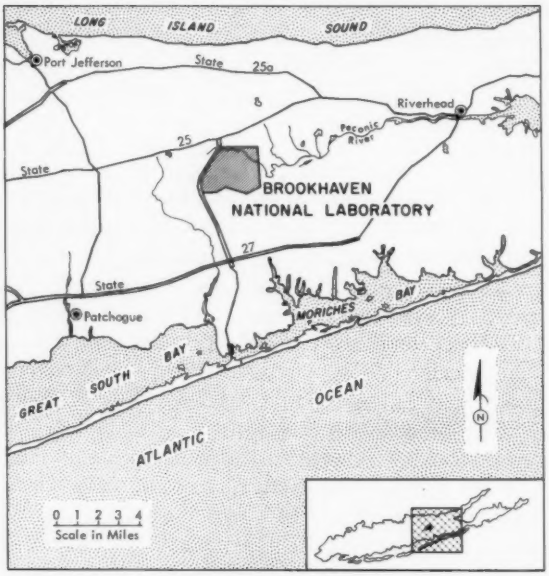

Figure 1. Brookhaven National Laboratory and surrounding area

Table 1. External gamma radioactivity at BNL site perimenter due to laboratory operations,[a] July–December 1969

1969	Average exposure tares (mR/week)			
	Northwest perimeter	Southwest perimeter	Southeast perimeter	Northeast perimeter
July	0.00	0.00	0.00	2.01
August	.00	.00	.00	2.08
September	.00	.00	.00	1.89
October	.00	.00	.00	1.63
November	.00	.00	.00	1.57
December	.00	.00	.00	1.31
Highest weekly reading (July-December)	0.00	0.00	0.00	2.17
Average undisturbed background (July-December)	1.67	1.88	1.82	1.72
1969 summary:				
January-June	.008	0.00	0.08	1.51
July-December	.00	.00	.00	1.74
January-December	.04	.00	.04	1.63
Highest weekly reading, 1969	1.38	.04	.76	2.44
Average undisturbed background (January-December)	1.65	1.75	1.75	1.62

[a] Due principally to argon-41 in reactor cooling air, and at the northeast perimeter, to the ecology forest cesium-137 source.

Area monitoring

The average weekly radiation levels at the Brookhaven National Laboratory site perimeter (figure 2), due to laboratory operations, are given in table 1. Radiation levels at the northeast perimeter are somewhat greater than at other monitoring stations due to a cesium-137 source located in the nearby forest. The radiation levels at this location were 17 percent of the established Atomic Energy Commission (AEC) radiation protection standard of 500 mrem/a for individuals in the general population. Values of radiation background levels undisturbed by laboratory operations also have been included in table 1 for purposes of comparison.

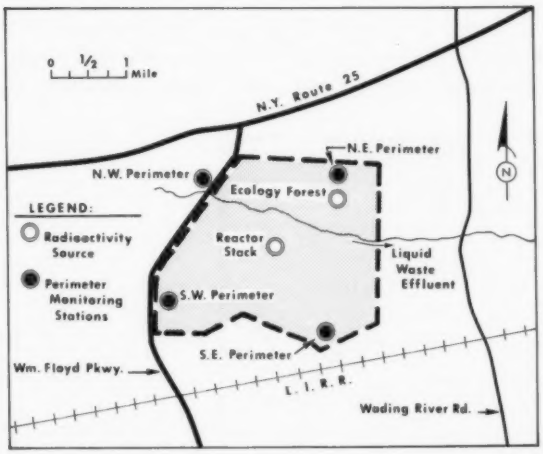

Figure 2. Brookhaven National Laboratory monitoring station locations

Water monitoring

The liquid waste effluent from the laboratory sewage processing plant is monitored continuously at the point where the stream leaves the BNL site. The average concentration and total amount of gross beta radioactivity in the liquid waste effluent, at the site boundary, are shown in table 2 for July-December 1969.

Analysis of composite samples of the effluent has shown that, on the average, less than 20 percent of the radioactivity consists of strontium-90. No appreciable amounts of radioactive iodine or bone-seeking radionuclides (such as radium) other than strontium, are present. Under these conditions, the applicable AEC radiation protection standard for discharge of liquid waste to uncontrolled areas would be 1 nCi/liter.

Most gross beta measurement instruments are not sensitive to low energy beta emitters, such as tritium, for which special analytical methods must be employed. The concentration and amounts of tritium found during this reporting period in the laboratory's liquid waste effluent are also shown in table 2. The applicable AEC standard is 3 μCi/liter, averaged over a period of 1 year. The observed concentration of tritium at BNL was 0.4 percent of this standard.

Recent coverage in *Radiation Data and Reports:*

Period	Issue
January–June 1969	August 1972

Table 2. Gross beta radioactivity in liquid waste effluent at BNL site boundary, July–December 1969.

1969	Volume of flow (gallons/day)	Average beta radioactivity concentration (pCi/liter)	Total beta radioactivity concentration discharged (mCi)	Tritium concentration (nCi/liter)	Tritium radioactivity (Ci)
July	204,000	13	0.3	16	0.4
August	590,000	10	.8	7	.6
September	395,000	10	.4	2	.1
October	395,000	9	.4	34	1.4
November	465,000	15	1.0	14	.8
December	788,000	11	.8	6	.5
January-June	551,000	16	6.2	3	1.7
July-December	480,000	11	3.7	11	3.7
January-December	515,000	14	9.9	8	5.4

2. Neutron Devices Department[3] January–June 1971

General Electric Company
St. Petersburg, Fla.

The Neutron Devices Department (figure 3) is an electronic component production facility. The plant maintains an environmental monitoring program to measure the levels of radioactive environmental contamination associated with plant effluents. These measurements serve as an index of the effectiveness of the plant's contamination control measures. Sewer effluent, surface water, milk, and air within 6 miles of the plant are monitored for radioactivity. The radioactivity concentrations, weighted by atmospheric and stream dilution factors, are compared with the AEC standards for continuous nonoccupational exposure as presented in AEC Manual chapter 0524.

[3] Summarized from "Environmental Monitoring, January 1 through June 30, 1971." General Electric Company, Neutron Devices Department, St. Petersburg, Fla.

Sewer effluent monitoring

Waste water discharges from the plant were sampled routinely at the site's boundary and analyzed for radioactive material. A total of 126 samples were obtained and analyzed for tritium content. In those instances where detectable concentrations occurred, the radioactivity resulted from controlled releases. Radioactivity releases from the process waste system into the plant's water effluents resulted in an average tritium concentration for the period of less than 4 percent of the AEC standard for continuous nonoccupational exposure (3 μCi/liter).

Surface water sampling

There were no indications of tritium in 159 routine surface water samples collected from areas surrounding the plant (detectable level—

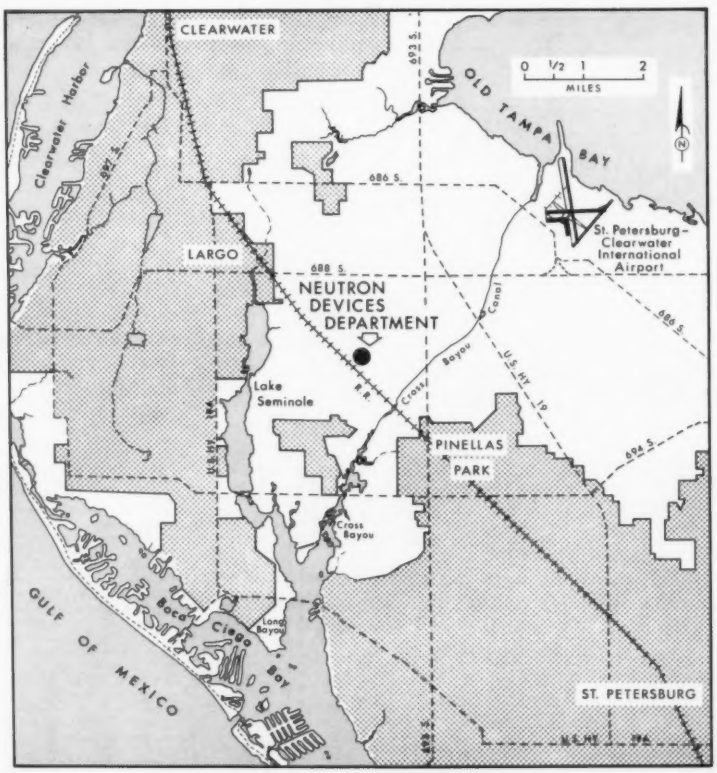

Figure 3. Location of the Neutron Devices Department

40 nCi/liter). These sample locations represent an area up to 6 miles in all directions from the plant site and are not related to the waste water effluent from the plant.

Milk sampling results

Analyses of 10 raw milk samples, provided by the Pinellas County Health Department from the one local dairy farm, revealed no detectable concentrations (detectable level—40 nCi/liter) of tritium.

Air sampling results

A total of 7 air samples were obtained during times of radioactivity releases. Analyses of these samples revealed that the maximum concentration, occurring over a period of 30 minutes, represented less than 0.6 percent of the AEC standard for tritium oxide in air for continuous nonoccupational exposure (200 nCi/liter).

Summary

Offsite radioactivity concentrations encountered by the general population are substantially lower than the AEC standards for continuous nonoccupational exposure.

Recent coverage in *Radiation Data and Reports:*

Period	Issue
January–June 1970	February 1971
July–December 1970	April 1972

Nuclear Power Reactors in the United States
June 30, 1972

Each quarter year, the Atomic Energy Commission releases information on the status of all present and proposed civilian nuclear power generating units in the United States. This information is reproduced for interested readers of *Radiation Data and Reports.*

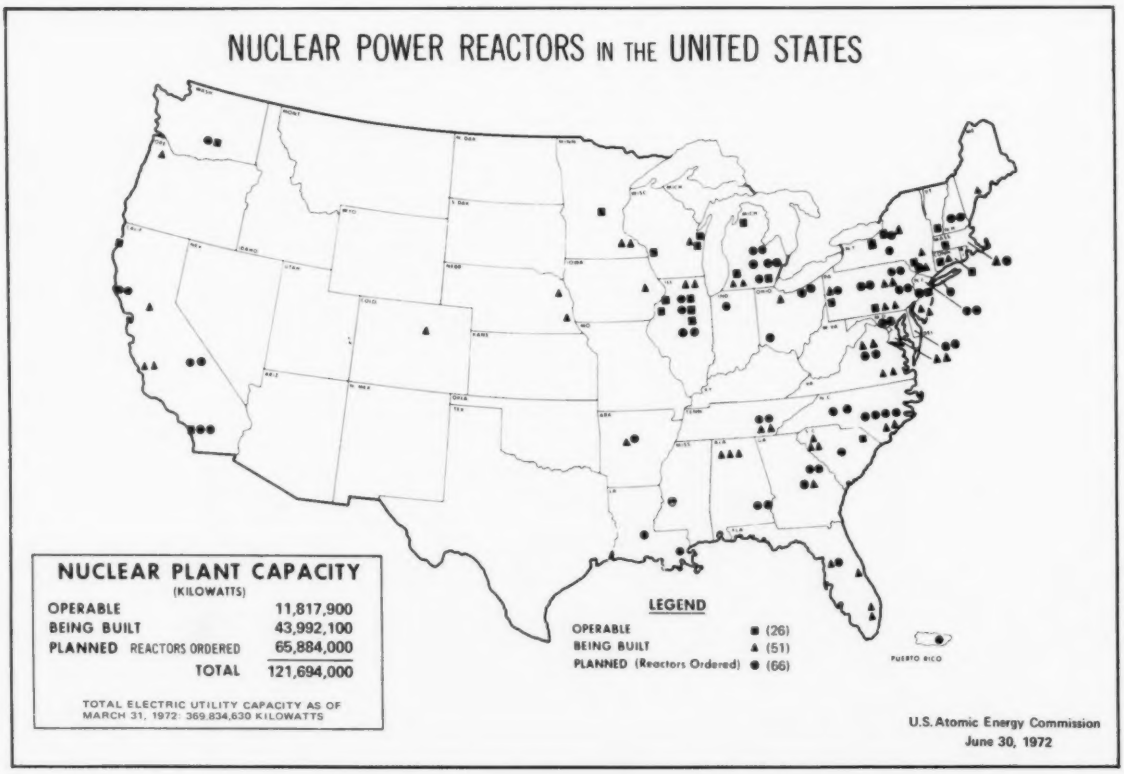

Figure 1. Nuclear power plants in the United States

SITE	PLANT NAME	CAPACITY (Net Kilowatts)	UTILITY	INITIAL DESIGN POWER
ALABAMA				
Decatur	Browns Ferry Nuclear Power Plant: Unit 1	1,065,000	Tennessee Valley Authority	1972
Decatur	Browns Ferry Nuclear Power Plant: Unit 2	1,065,000	Tennessee Valley Authority	1973
Decatur	Browns Ferry Nuclear Power Plant: Unit 3	1,065,000	Tennessee Valley Authority	1973
Dothan	Joseph M. Farley Nuclear Plant: Unit 1	829,000	Alabama Power Co.	1975
Dothan	Joseph M. Farley Nuclear Plant: Unit 2	829,000	Alabama Power Co.	1977
ARKANSAS				
Russellville	Arkansas Nuclear One: Unit 1	820,000	Arkansas Power & Light Co.	1973
Russellville	Arkansas Nuclear One: Unit 2	920,000	Arkansas Power & Light Co.	1975
CALIFORNIA				
Humboldt Bay	Humboldt Bay Power Plant: Unit 3	68,500	Pacific Gas and Electric Co.	1963
San Clemente	San Onofre Nuclear Generating Station: Unit 1	430,000	So. Calif. Ed. & San Diego Gas & El. Co.	1967
San Clemente	San Onofre Nuclear Generating Station: Unit 2	1,140,000	So. Calif. Ed. & San Diego Gas & El. Co.	–
San Clemente	San Onofre Nuclear Generating Station: Unit 3	1,140,000	So. Calif. Ed. & San Diego Gas & El. Co.	–
Diablo Canyon	Diablo Canyon Nuclear Power Plant: Unit 1	1,060,000	Pacific Gas and Electric Co.	1974
Diablo Canyon	Diablo Canyon Nuclear Power Plant: Unit 2	1,060,000	Pacific Gas and Electric Co.	1975
Clay Station	Rancho Seco Nuclear Generating Station	804,000	Sacramento Municipal Utility District	1973
Pt. Arena	Mendocino Power Plant: Unit 1	1,128,000	Pacific Gas & Electric Co.	1978
Pt. Arena	Mendocino Power Plant: Unit 2	1,128,000	Pacific Gas & Electric Co.	1979
*	–	770,000	Southern California Edison Co.	1981
*	–	770,000	Southern California Edison Co.	1982
COLORADO				
Platteville	Ft. St. Vrain Nuclear Generating Station	330,000	Public Service Co. of Colorado	1972
CONNECTICUT				
Haddam Neck	Haddam Neck Plant	575,000	Conn. Yankee Atomic Power Co.	1967
Waterford	Millstone Nuclear Power Station: Unit 1	652,100	Northeast Utilities	1970
Waterford	Millstone Nuclear Power Station: Unit 2	828,000	Northeast Utilities	1974
DELAWARE				
*	Delmarva Unit 1	770,000	Delmarva Power & Light Co.	1978
*	Delmarva Unit 2	770,000	Delmarva Power & Light Co.	1982
FLORIDA				
Turkey Point	Turkey Point Station: Unit 3	693,000	Florida Power & Light Co.	1972
Turkey Point	Turkey Point Station: Unit 4	693,000	Florida Power & Light Co.	1972
Red Level	Crystal River Plant: Unit 3	825,000	Florida Power Corp.	1973
Red Level	Crystal River Plant: Unit 4	897,000	Florida Power Corp.	1978
Ft. Pierce	Hutchinson Island: Unit 1	800,000	Florida Power and Light Co.	1974
GEORGIA				
Baxley	Edwin I. Hatch Nuclear Plant: Unit 1	786,000	Georgia Power Co.	1973
Baxley	Edwin I. Hatch Nuclear Plant: Unit 2	786,000	Georgia Power Co.	1976
Waynesboro	Alvin W. Vogtle, Jr. Plant: Unit 1	1,100,000	Georgia Power Co.	1978
Waynesboro	Alvin W. Vogtle, Jr. Plant: Unit 2	1,100,000	Georgia Power Co.	1979
ILLINOIS				
Morris	Dresden Nuclear Power Station: Unit 1	200,000	Commonwealth Edison Co.	1960
Morris	Dresden Nuclear Power Station: Unit 2	800,000	Commonwealth Edison Co.	1970
Morris	Dresden Nuclear Power Station: Unit 3	800,000	Commonwealth Edison Co.	1972
Zion	Zion Nuclear Plant: Unit 1	1,050,000	Commonwealth Edison Co.	1972
Zion	Zion Nuclear Plant: Unit 2	1,050,000	Commonwealth Edison Co.	1973
Cordova	Quad-Cities Station: Unit 1	800,000	Comm. Ed. Co.-Ia.-Ill. Gas & Elec. Co.	1972
Cordova	Quad-Cities Station: Unit 2	800,000	Comm. Ed. Co.-Ia.-Ill. Gas & Elec. Co.	1972
Seneca	LaSalle Co. Nuclear Station: Unit 1	1,078,000	Comm. Ed. Co.-Ia.	1977
Seneca	LaSalle Co. Nuclear Station: Unit 2	1,078,000	Comm. Ed. Co.-Ia.	1978
*	Comed West: Unit 1	1,100,000	Comm. Edison Co.	1978
*	Comed West: Unit 2	1,100,000	Comm. Edison Co.	1979
INDIANA				
Dune Acres	Bailly Generating Station	660,000	Northern Indiana Public Service Co.	1977
IOWA				
Palo	Duane Arnold Energy Center: Unit 1	529,700	Iowa Electric Light and Power Co.	1973
LOUISIANA				
Taft	Waterford Generating Station	1,165,000	Louisiana Power & Light Co.	1976
St. Francisville	River Bend Station	940,000	Gulf States Utilities Co.	1979

Figure 1. Nuclear power plants in the United States—continued

SITE	PLANT NAME	CAPACITY (Net Kilowatts)	UTILITY	INITIAL DESIGN POWER
MAINE				
Wiscasset	Maine Yankee Atomic Power Plant	790,000	Maine Yankee Atomic Power Co.	1972
MARYLAND				
Lusby	Calvert Cliffs Nuclear Power Plant: Unit 1	845,000	Baltimore Gas and Electric Co.	1973
Lusby	Calvert Cliffs Nuclear Power Plant: Unit 2	845,000	Baltimore Gas and Electric Co.	1974
Perryman	Perryman Nuclear Plant: Unit 1	845,000	Baltimore Gas and Electric Co.	1979
Perryman	Perryman Nuclear Plant: Unit 2	845,000	Baltimore Gas and Electric Co.	1980
MASSACHUSETTS				
Rowe	Yankee Nuclear Power Station	175,000	Yankee Atomic Electric Co.	1961
Plymouth	Pilgrim Station: Unit 1	655,000	Boston Edison Co.	1972
Plymouth	Pilgrim Station: Unit 2	1,150,000	Boston Edison Co.	1978
MICHIGAN				
Big Rock Point	Big Rock Point Nuclear Plant	70,300	Consumers Power Co.	1963
South Haven	Palisades Nuclear Power Station	700,000	Consumers Power Co.	1971
Lagoona Beach	Enrico Fermi Atomic Power Plant: Unit 1	60,900	Detroit Edison Co.	1970
Lagoona Beach	Enrico Fermi Atomic Power Plant: Unit 2	1,123,000	Detroit Edison Co.	1975
Lagoona Beach	Enrico Fermi Atomic Power Plant: UNit 3	1,123,000	Detroit Edison Co.	1979
Bridgman	Donald C. Cook Plant: Unit 1	1,060,000	Indiana & Michigan Electric Co.	1973
Bridgman	Donald C. Cook Plant: Unit 2	1,060,000	Indiana & Michigan Electric Co.	1974
Midland	Midland Nuclear Power Plant: Unit 1	492,000	Consumers Power Co.	1977
Midland	Midland Nuclear Power Plant: Unit 2	818,000	Consumers Power Co.	1978
St. Clair County	Greenwood: Unit 2	1,150,000	Detroit Edison Co.	1979
St. Clair County	Greenwood: Unit 3	1,150,000	Detroit Edison Co.	1981
MINNESOTA				
Monticello	Monticello Nuclear Generating Plant	545,000	Northern States Power Co.	1971
Red Wing	Prairie Island Nuclear Generating Plant: Unit 1	530,000	Northern States Power Co.	1972
Red Wing	Prairie Island Nuclear Generating Plant: Unit 2	530,000	Northern States Power Co.	1974
MISSISSIPPI				
Port Gibson	Grand Gulf Nuclear Station	1,250,000	Mississippi Power & Light Co.	1979
NEBRASKA				
Fort Calhoun	Ft. Calhoun Station: Unit 1	457,400	Omaha Public Power District	1973
Brownville	Cooper Nuclear Station	778,000	Nebraska Public Power District and Iowa Power and Light Co.	1973
NEW HAMPSHIRE				
Seabrook	–	1,100,000	Public Service of N.H.	1979
Seabrook	–	1,100,000	Public Service of N.H.	1981
NEW JERSEY				
Toms River	Oyster Creek Nuclear Power Plant: Unit 1	640,000	Jersey Central Power & Light Co.	1969
Forked River	Forked River Generating Station: Unit 1	1,140,000	Jersey Central Power & Light Co.	1978
Salem	Salem Nuclear Generating Station: Unit 1	1,090,000	Public Service Electric and Gas, N.J.	1974
Salem	Salem Nuclear Generating Station: Unit 2	1,115,000	Public Service Electric and Gas, N.J.	1975
Bordentown	Newbold Nuclear Generating Station: Unit 1	1,067,000	Public Service Electric and Gas, N.J.	1978
Bordentown	Newbold Nuclear Generating Station: Unit 2	1,067,000	Public Service Electric and Gas, N.J.	1979
NEW YORK				
Indian Point	Indian Point Station: Unit 1	265,000	Consolidated Edison Co.	1963
Indian Point	Indian Point Station: Unit 2	873,000	Consolidated Edison Co.	1972
Indian Point	Indian Point Station: Unit 3	965,000	Consolidated Edison Co.	1974
Scriba	Nine Mile Point Nuclear Station: Unit 1	625,000	Niagara Mohawk Power Co.	1970
Scriba	Nine Mile Point Nuclear Station: Unit 2	1,080,000	Niagara Mohawk Power Co.	1978
Ontario	R.E.Ginna Nuclear Power Plant: Unit 1	420,000	Rochester Gas & Electric Co.	1970
Brookhaven	Shoreham Nuclear Power Station	819,000	Long Island Lighting Co.	1977
Lansing	Bell Station	838,000	New York State Electric & Gas. Co.	1978
Verplanck	Con. Ed. Nuclear #4	1,115,000	Consolidated Edison Co.	1977
Scriba	James A. Fitzpatrick Nuclear Power Plant	821,000	Power Authority of State of N.Y.	1973
NORTH CAROLINA				
Southport	Brunswick Steam Electric Plant: Unit 1	821,000	Carolina Power and Light Co.	1975
Southport	Brunswick Steam Electric Plant: Unit 2	821,000	Carolina Power and Light Co.	1974
Cowans Ford Dam	Wm. B. McGuire Nuclear Station: Unit 1	1,150,000	Duke Power Co.	1975
Cowans Ford Dam	Wm. B. McGuire Nuclear Station: Unit 2	1,150,000	Duke Power Co.	1977
Bonsal	Shearon Harris Plant: Unit 1	915,000	Carolina Power & Light Co.	1977
Bonsal	Shearon Harris Plant: Unit 2	915,000	Carolina Power & Light Co.	1978
Bonsal	Shearon Harris Plant: Unit 3	915,000	Carolina Power & Light Co.	1979
Bonsal	Shearon Harris Plant: Unit 4	915,000	Carolina Power & Light Co.	1980

Figure 1. Nuclear power plants in the United States—continued

SITE	PLANT NAME	CAPACITY (Net Kilowatts)	UTILITY	INITIAL DESIGN POWER
OHIO				
Oak Harbor	Davis-Besse Nuclear Power Station	872,000	Toledo Edison-Cleveland Electric Illuminating Co.	1974
Painesville	Perry Nuclear Power Plant: Unit 1	1,100,000	Cleveland Electric Illuminating Co.	1979
Painesville	Perry Nuclear Power Plant: Unit 2	1,100,000	Cleveland Electric Illuminating Co.	1980
Moscow	Wm. H. Zimmer Nuclear Power Station: Unit 1	810,000	Cincinnati Gas & Electric Co.	1976
OREGON				
Prescott	Trojan Nuclear Plant: Unit 1	1,130,000	Portland General Electric Co.	1974
PENNSYLVANIA				
Peach Bottom	Peach Bottom Atomic Power Station: Unit 1	40,000	Philadelphia Electric Co.	1967
Peach Bottom	Peach Bottom Atomic Power Station: Unit 2	1,065,000	Philadelphia Electric Co.	1973
Peach Bottom	Peach Bottom Atomic Power Station: Unit 3	1,065,000	Philadelphia Electric Co.	1974
Pottstown	Limerick Generating Station: Unit 1	1,065,000	Philadelphia Electric Co.	1976
Pottstown	Limerick Generating Station: Unit 2	1,065,000	Philadelphia Electric Co.	1977
Shippingport	Shippingport Atomic Power Station: Unit 1	90,000	Duquesne Light Co.	1957
Shippingport	Beaver Valley Power Station: Unit 1	856,000	Duquesne Light Co.-Ohio Edison Co.	1974
Shippingport	Beaver Valley Power Station: Unit 2	856,000	Duquesne Light Co.-Ohio Edison Co.	1978
Goldsboro	Three Mile Island Nuclear Station: Unit 1	819,000	Metropolitan Edison Co.	1973
Goldsboro	Three Mile Island Nuclear Station: Unit 2	905,000	Jersey Central Power & Light Co.	1975
Berwick	Susquehanna Steam Electric Station: Unit 1	1,052,000	Pennsylvania Power and Light	1979
Berwick	Susquehanna Steam Electric Station: Unit 2	1,052,000	Pennsylvania Power and Light	1981
*	Philadelphia Electric Co.: HTGR No. 1	1,140,000	Philadelphia Electric Co.	1979
*	Philadelphia Electric Co.: HTGR No. 2	1,140,000	Philadelphia Electric Co.	1981
SOUTH CAROLINA				
Hartsville	H. B. Robinson S.E. Plant: Unit 2	700,000	Carolina Power & Light Co.	1971
Seneca	Oconee Nuclear Station: Unit 1	841,000	Duke Power Co.	1972
Seneca	Oconee Nuclear Station: Unit 2	886,000	Duke Power Co.	1973
Seneca	Oconee Nuclear Station: Unit 3	886,000	Duke Power Co.	1973
Broad River	Virgil C. Summer Nuclear Station: Unit 1	900,000	South Carolina Electric & Gas Co.	1977
TENNESSEE				
Daisy	Sequoyah Nuclear Power Plant: Unit 1	1,140,000	Tennessee Valley Authority	1974
Daisy	Sequoyah Nuclear Power Plant: Unit 2	1,140,000	Tennessee Valley Authority	1975
Spring City	Watts Bar Nuclear Plant: Unit 1	1,169,000	Tennessee Valley Authority	1976
Spring City	Watts Bar Nuclear Plant: Unit 2	1,169,000	Tennessee Valley Authority	1977
VERMONT				
Vernon	Vermont Yankee Generating Station	513,900	Vermont Yankee Nuclear Power Corp.	1972
VIRGINIA				
Gravel Neck	Surry Power Station: Unit 1	788,000	Virginia Electric & Power Co.	1972
Gravel Neck	Surry Power Station: Unit 2	788,000	Virginia Electric & Power Co.	1973
Mineral	North Anna Power Station: Unit 1	845,000	Virginia Electric & Power Co.	1974
Mineral	North Anna Power Station: Unit 2	845,000	Virginia Electric & Power Co.	1975
Mineral	North Anna Power Station: Unit 3	900,000	Virginia Electric & Power Co.	1977
Mineral	North Anna Power Station: Unit 4	900,000	Virginia Electric & Power Co.	1978
WASHINGTON				
Richland	N-Reactor/WPPSS Steam	800,000	Atomic Energy Commission	1966
Richland	Hanford No. 2	1,103,000	Washington Public Power Supply System	1977
WISCONSIN				
Genoa	Genoa Nuclear Generating Station	53,200	Dairyland Power Cooperative	1969
Two Creeks	Point Beach Nuclear Plant: Unit 1	497,000	Wisconsin Michigan Power Co.	1971
Two Creeks	Point Beach Nuclear Plant: Unit 2	497,000	Wisconsin Michigan Power Co.	1972
Carlton	Kewaunee Nuclear Power Plant: Unit 1	541,000	Wisconsin Michigan Power Co.	1972
PUERTO RICO				
Puerto De Jobas	Aguirre Nuclear Power Plant	583,000	Puerto Rico Water Resources Authority	1975

* Site not selected.

*	–	1,175,000	Tennessee Valley Authority	1977
*	–	1,175,000	Tennessee Valley Authority	1978

Figure 1. Nuclear power plants in the United States—continued

Reported Nuclear Detonations, August 1972

(Includes seismic signals presumably from foreign nuclear detonations)

There were no United States nuclear detonations reported by the U.S. Atomic Energy Commission in August 1972.

The U.S. Atomic Energy Commission announced that the United States recorded seismic signals, presumably from a Soviet underground nuclear explosion. The signals originated from the Semipalatinsk nuclear test area and were equivalent to those of an underground nuclear explosion in the intermediate yield range of 20 to 200 kilotons.

On August 19, 1972, seismic signals, presumably from a Soviet underground nuclear explosion, were recorded by the United States. The signals originated north of the Caspian Sea and were equivalent to those of an underground nuclear explosion in the yield range of 20-200 kilotons.

Seismic signals presumably from a Soviet underground nuclear test with a yield range of 20-200 kilotons were recorded by the United States on August 25, 1972, about 11:45 p.m., EDT, at the Semipalatinsk nuclear test area.

Seismic signals from a Soviet underground nuclear test with a yield of about 1 megaton were recorded by the United States. The signals originated at approximately 2:00 a.m., EDT, August 28, 1972, at the Novaya Zemlya nuclear test area in the Arctic.

Information in this section is based on data received during the month, and is subject to change as additional information may become available. Persons requiring information for purposes of compiling announced nuclear detonation statistics are advised to contact the Division of Public Information, U.S. Atomic Energy Commission, Washington, D.C. 20545.

☆U.S. GOVERNMENT PRINTING OFFICE: 1972 — 514-840/9

SYNOPSES

Synopses of reports, incorporating a list of key words, are furnished below in reference card format for the convenience of readers who may wish to clip them for their files.

ENVIRONMENTAL MONITORING AND DISPOSAL OF RADIOACTIVE WASTES FROM U.S. NAVAL NUCLEAR-POWERED SHIPS AND THEIR SUPPORT FACILITIES, 1971. *M. E. Miles, G. L. Sjoblom, and R. D. Burke. Radiation Data and Reports, Vol. 13,* September 1972, pp. 469–478.

This report assesses the effect on the environment of disposal of radioactive wastes originating from U.S. Naval nuclear propulsion plants and their support facilities. The total radioactivity discharged into all ports and harbors from the more than 100 reactor plants and supporting tenders, bases, and shipyards was less than 0.002 curie in 1971. This small amount of radioactivity has had no significant or discernable effect on the quality of the human environment. Results of environmental surveys of harbor water and bottom sediment for gross radioactivity and for cobalt-60 show that (1) no increase in radioactivity has been detected in harbor water, (2) discharges of liquid wastes from U.S. Naval nuclear-powered ships have not caused a measurable increase in the general background radioactivity of the environment, and (3) low-level cobalt-60 radioactivity is still detectable in localized areas of harbor bottom sediment around a few piers at operating bases and shipyards where maintenance and overhaul of Naval nuclear-powered ships have been conducted over a period of several years; these levels have decreased in recent years.

This report confirms that procedures used by the Navy to control discharges of radioactivity from U.S. Naval nuclear-powered ships and their support facilities are effective in protecting the environment and the health and safety of the general public.

KEYWORDS: Discharges, disposal, harbors, monitoring, nuclear-powered ships, radioactivity, U.S. Navy, wastes.

ORDER BLANK FOR RD&R

To: Superintendent of Documents
Government Printing Office
Washington, D.C. 20402

Please enter my subscription for Radiation Data and Reports. I am enclosing Money Order ☐ Check ☐ for this subscription. ($6.00 a year; $1.50 additional for foreign mailing.)

Please address RD&R as follows. _____

_____

_____

UNITED STATES GOVERNMENT PRINTING OFFICE, WASHINGTON, D.C., 1972
For sale by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402
Subscription price $6.00 a year, $1.50 additional for foreign mailing.
Price for a single copy of this issue is 50 cents

September 1972

GUIDE FOR AUTHORS

The editorial staff invites reports and technical notes containing information related to radiological health. Proposed reports and notes should contain data and interpretations. All accepted manuscripts are subject to copy editing with approval of the author. The author is responsible for all statements made in his work.

Manuscripts are received with the understanding that other identical manuscripts are not under simultaneous consideration nor have appeared in any other publication.

The mission of *Radiation Data and Reports* is stated on the title page. It is suggested that authors read it for orientation of subject matter.

Submission of manuscripts

Send original and one legible copy of the paper, typed double-spaced on 8½ by 11-inch white bond with 1-inch margins.

Submitted manuscripts should be sent to Editor, Radiation Data and Reports, EPA, Office of Radiation Programs, Parklawn 18 B-40, Washington, D.C. 20460.

Preparation of manuscripts

The Government Printing Office style manual is used as a general guide in the preparation of all copy for *Radiation Data and Reports*. In addition, *Radiation Data and Reports* has developed a "Guide" regarding manuscript preparation which is available upon request. However, for most instances, past issues of *Radiation Data and Reports* would serve as a suitable guide in preparing manuscripts.

Titles, authors: Titles should be concise and informative enough to facilitate indexing. Names of authors should appear on the third line below the manuscript title. Affiliation of each author should be given by a brief footnote including titles, professional connections at the time of writing, present affiliation if different, and present address.

Abstracts: Manuscripts should include a 100- to 150-word abstract which is a factual (not descriptive) summary of the work. It should clearly and concisely state the purpose of the investigation, methods, results and conclusions. Findings that can be stated clearly and simply should be given rather than to state that results were obtained.

A list of suggested keywords (descriptors) which are appropriate indexing terms should be given following the abstract.

Introductory paragraph: The purpose of the investigation should be stated as early as possible in the introductory paragraph.

Methods: For analytical, statistical, and theoretical methods that have appeared in published literature a general description with references to sources is sufficient. New methods should be described clearly and concisely with emphasis on new features. Both old and new methods, materials, and equipment, should be described clearly enough so that limitations of measurements and calculations will be clear to the readers. Errors associated with analytical measurements and related calculations should be given either as general estimates in the text or for specific data in appropriate tables or graphs whenever possible.

Illustrations: Glossy photographic prints or original illustrations suitable for reproduction which help enhance the understanding of the text should be included with the manuscript. Graphic materials should be of sufficient size so that lettering will be legible after reduction to printed page size (8½ by 6½ inches).

All illustrations should be numbered and each legend should be typed double-spaced on a separate sheet of paper. Legends should be brief and understandable without reference to text. The following information should be typed on a gummed label or adhesive strip and affixed to the back of each illustration: figure number, legend, and title of manuscript or name of senior author.

Tables: Tables should be self-explanatory and should supplement, not duplicate, the text. Each table should be typed on a separate sheet, double-spaced. All tables must be numbered consecutively beginning with 1, and each must have a title.

Equations: All equations must be typewritten, preferably containing symbols which are defined immediately below the equation. The definition of symbols should include the units of each term. Special symbols, such as Greek letters, may be printed carefully in the proper size, and exponents and subscripts should be clearly positioned. Mathematical notations should be simple, avoiding when feasible such complexities as fractions with fractions, subscripts with subscripts, etc.

Symbols and units: The use of internationally accepted units of measurements is preferred. A brief list of symbols and units commonly used in *Radiation Data and Reports* is given on the inside front cover of every issue and examples of most other matters of preferred usage may be found by examining recent issues. Isotope mass numbers are placed at the supper left of elements in long series of formulas, *e.g.*, ^{137}Cs; however, elements are spelled out in text and tables, with isotopes of the elements having a hyphen between element name and mass number; *e.g.*, strontium-90.

References: References should be typed on a separate sheet of paper.

Personal communications and unpublished data should not be included in the list of references. The following minimum data for each reference should be typed double-spaced: names of all authors in caps, complete title of article cited, name of journal abbreviated according to *Index Medicus*, volume number, first and last page numbers, month or week of issue, and year of publication. They should be arranged according to the order in which they are cited in the text, and not alphabetically. All references must be numbered consecutively.

Reprints

Contributors are ordinarily provided with 50 courtesy copies of the articles in the form of reprints. In cases of multiple authorship, additional copies will be provided for coauthors upon request.

U.S. ENVIRONMENTAL
PROTECTION AGENCY
OFFICE OF RADIATION PROGRAMS
WASHINGTON, D.C. 20460

OFFICIAL BUSINESS

POSTAGE AND FEES PAID
U.S. ENVIRONMENTAL PROTECTION
AGENCY
EPA-335

Please CHECK if you do not desire to continue receiving this publication ☐; or, if a change of address is needed ☐ (indicate change, including zip code); tear off this cover and return to the above address.